

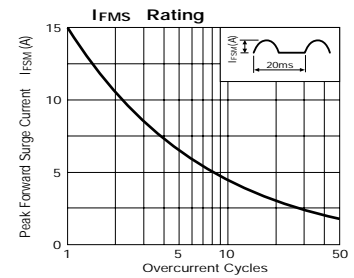







Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)							Others				
	V _{RM} (V)	I _{F(AV)} (A)	I _{F(SM)} (A) 50Hz Half-cycle Sinewave Single Shot	T _j (°C)	T _{stg} (°C)	V _F (V) max	I _F (A)	I _R (μA) V _R =V _{RM} max	I _R (H) (μA) V _R =V _{RM} Ta=100°C max	t _{rr} (1) (μs) I _F /I _{RP} (mA)	t _{rr} (2) (μs) I _F /I _{RP} (mA)	R _{th(j-ℓ)} (°C/W)	Mass (g)	Fig.			
RU 1	400	0.25	15	-40 to +150		2.5	0.25	10	200	0.4	10/10	0.18	10/20	15	Ⓐ		
RU 1A	600																
RU 1B	800																
RU 1C	1000	0.2					3.0										
RU 2Z	200																
RU 2	600	1.0	20					1.5	1.0	10	300	0.4	10/10	0.18		10/20	15
RU 2B	800																
RU 2C	1000																
RU 2M	400	1.1	20					1.2	1.1	10	300	0.4	10/10	0.18		10/20	15
RU 2AM	600																

RU 1 series



RU 2 series

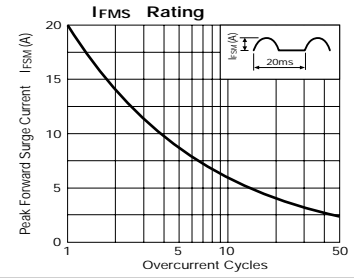

RU 2M series

