

Preliminary Data Sheet PD-20682 09/04

International IOR Rectifier

12CWQ10G

SCHOTTKY RECTIFIER

12 Amp

$$I_{F(AV)} = 12\text{Amp}$$

$$V_R = 100\text{V}$$

Major Ratings and Characteristics

| Characteristics | Values | Units |
|--|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform | 12 | A |
| V_{RRM} | 100 | V |
| I_{FSM} @ tp = 5 μ s sine | 330 | A |
| V_F @ 6 Apk, $T_J = 125^\circ\text{C}$ (per leg) | 0.65 | V |
| T_J range | -55 to 150 | $^\circ\text{C}$ |

Description/ Features

The 12CWQ10G surface mount, center tap, Schottky rectifier series has been designed for applications requiring low forward drop and small foot prints on PC board. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.


- Popular D-PAK outline
- Center tap configuration
- Small foot print, surface mountable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

12CWQ10G



D-PAK



12CWQ10G

Preliminary Data Sheet PD-20682 09/04



Voltage Ratings

| Part number | 12CWQ10G |
|--|----------|
| V _R Max. DC Reverse Voltage (V) | 100 |
| V _{RWM} Max. Working Peak Reverse Voltage (V) | |

Absolute Maximum Ratings

| Parameters | 12CWQ... | Units | Conditions |
|--|------------|-------|---|
| I _{F(AV)} Max. Average Forward Current * See Fig. 5 (Per Leg) (Per Device) | 6 12 | A | 50% duty cycle @ T _C = 135°C, rectangular wave form |
| I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7 (Per Leg) | 330 110 | A | 5µs Sine or 3µs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V _{RRM} applied |
| E _{AS} Non-Repetit. Avalanche Energy (Per Leg) | 6 | mJ | T _J = 25 °C, I _{AS} = 1 Amps, L = 12 mH |
| I _{AR} Repetitive Avalanche Current (Per Leg) | 1 | A | Current decaying linearly to zero in 1 µsec Frequency limited by T _J max. V _A = 1.5 x V _R typical |

Electrical Specifications

| Parameters | 12CWQ... | Units | Conditions |
|---|----------|-------|---|
| V _{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1) | 0.80 | V | @ 6A T _J = 25 °C |
| | 0.95 | V | @ 12A |
| | 0.65 | V | @ 6A T _J = 125 °C |
| | 0.78 | V | @ 12A |
| I _{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1) | 0.22 | mA | T _J = 25 °C |
| | 4 | mA | T _J = 125 °C V _R = rated V _R |
| V _{F(TO)} Threshold Voltage | 0.47 | V | T _J = T _J max. |
| r _t Forward Slope Resistance | 20.68 | mΩ | |
| C _T Typ. Junction Capacitance (Per Leg) | 183 | pF | V _R = 5V _{DC} (test signal range 100Khz to 1Mhz) 25°C |
| L _S Typical Series Inductance (Per Leg) | 5.0 | nH | Measured lead to lead 5mm from package body |

(1) Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

| Parameters | 12CWQ... | Units | Conditions |
|---|------------|---------|---------------------------|
| T _J Max. Junction Temperature Range (*) | -55 to 150 | °C | |
| T _{stg} Max. Storage Temperature Range | -55 to 150 | °C | |
| R _{thJC} Max. Thermal Resistance (Per Leg) Junction to Case (Per Device) | 3.0 | °C/W | DC operation * See Fig. 4 |
| | 1.5 | | |
| wt Approximate Weight | 0.3 (0.01) | g (oz.) | |
| Case Style | D-Pak | | Similar to TO-252AA |
| Device Marking | 12CWQ10G | | |

(*) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

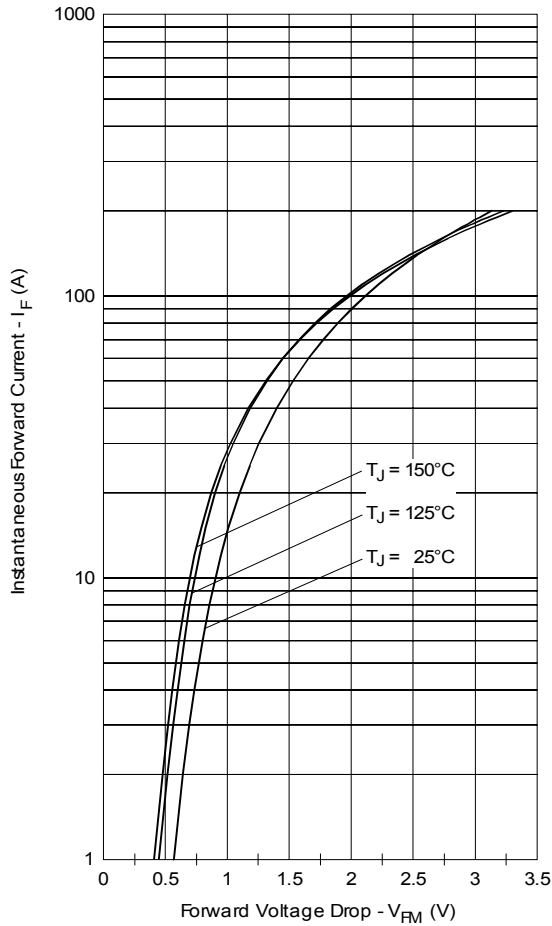


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

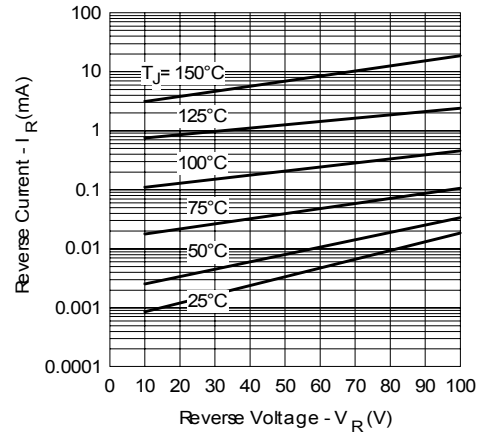


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

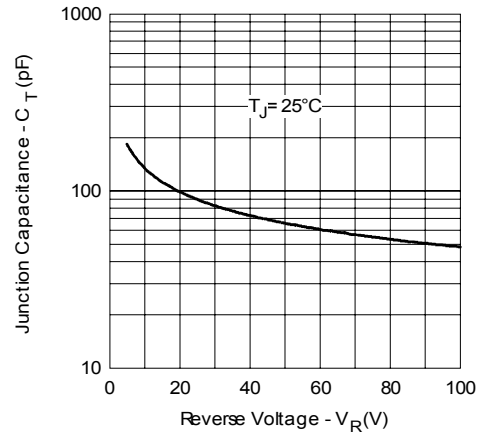


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

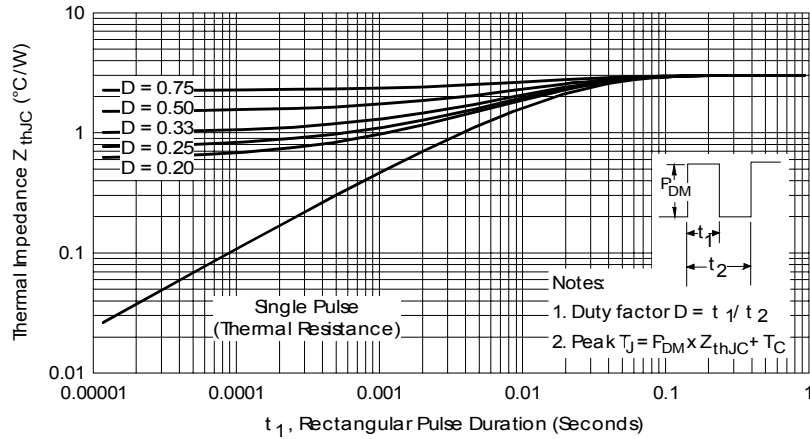


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

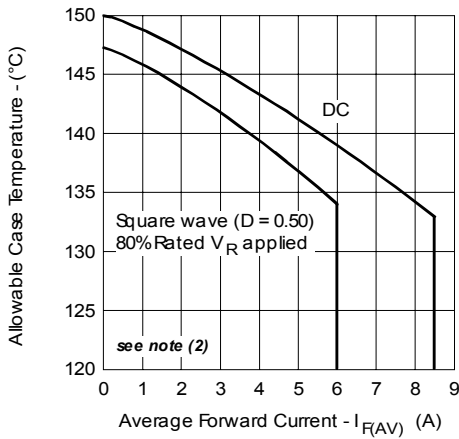


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

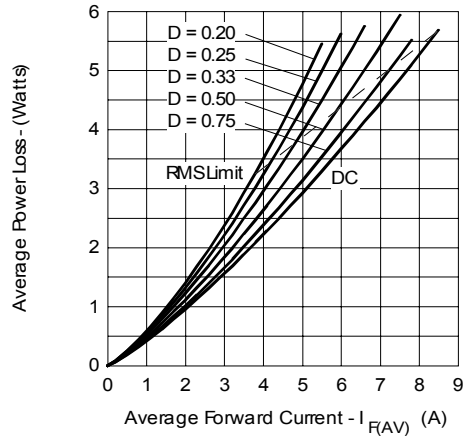


Fig. 6 - Forward Power Loss Characteristics (Per Leg)


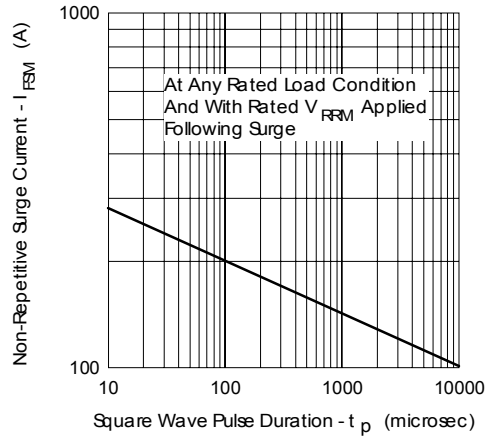



Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D); I_R @ V_{R1} = 80\% \text{ rated } V_R$


Outline Table

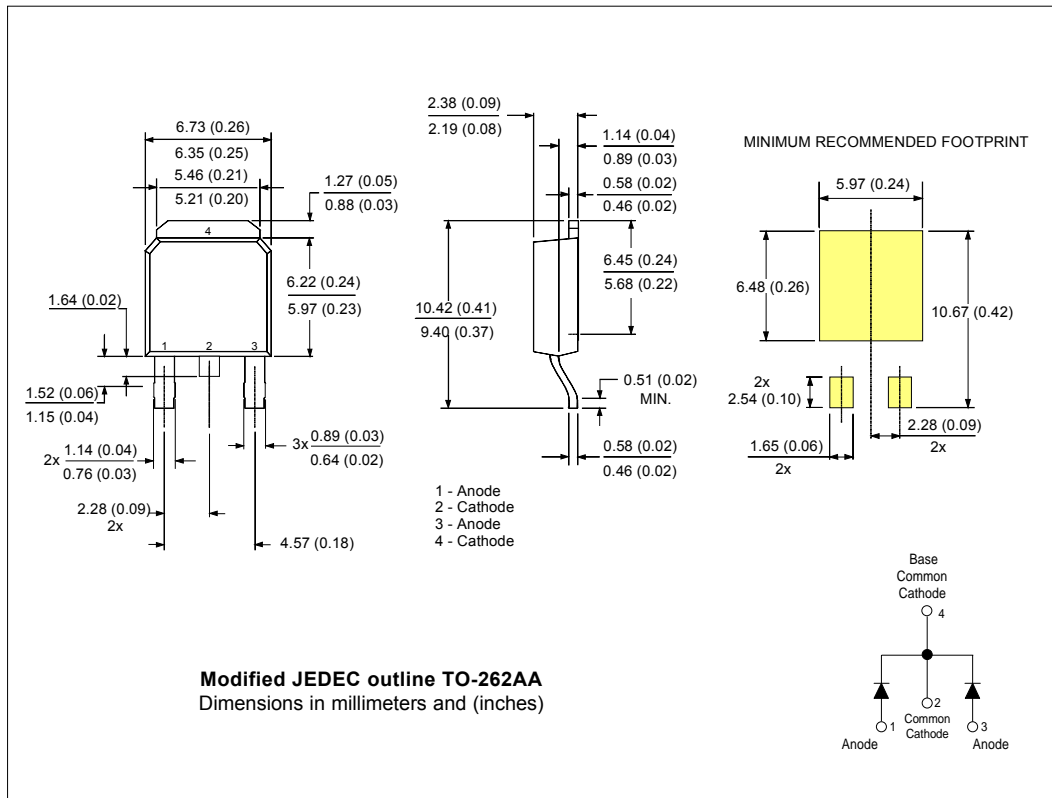

Marking Information

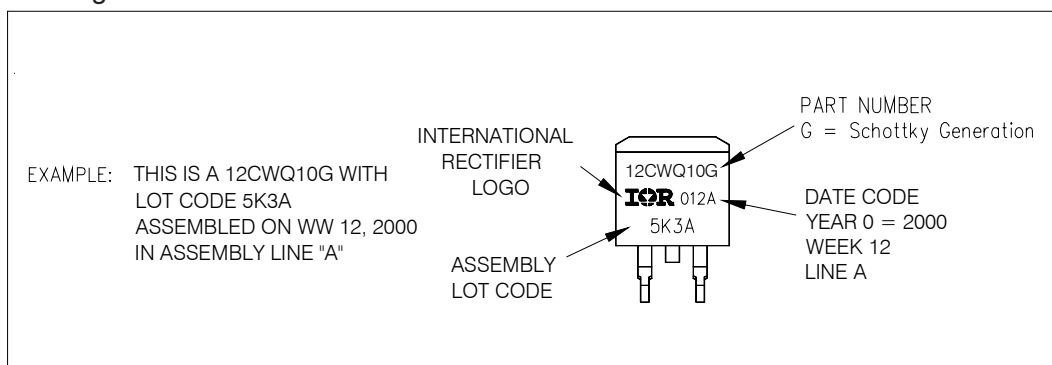

Tape & Reel Information

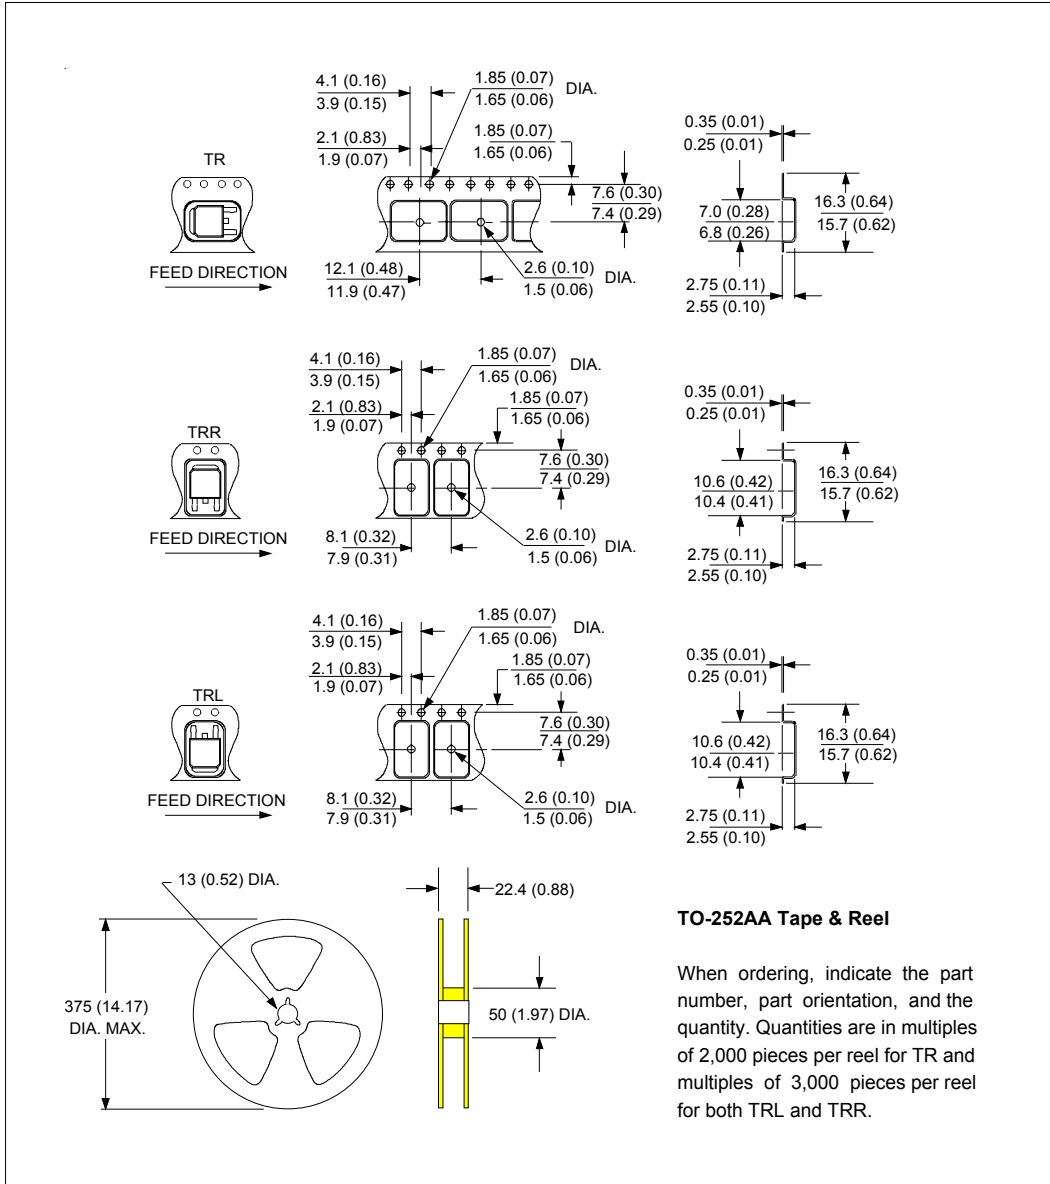

TO-252AA Tape & Reel

When ordering, indicate the part number, part orientation, and the quantity. Quantities are in multiples of 2,000 pieces per reel for TR and multiples of 3,000 pieces per reel for both TRL and TRR.

Ordering Information Table

| Device Code | | | | | | | | | | | | | | | | | |
|-------------|---|----|---|----|---|-----|---|-----|---|---|---|---|---|---|---|---|---|
| | <table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">12</td> <td style="padding: 5px;">C</td> <td style="padding: 5px;">W</td> <td style="padding: 5px;">Q</td> <td style="padding: 5px;">10</td> <td style="padding: 5px;">G</td> <td style="padding: 5px;">TRL</td> <td style="padding: 5px;">-</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> <td style="text-align: center;">⑧</td> </tr> </table> | 12 | C | W | Q | 10 | G | TRL | - | ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ |
| 12 | C | W | Q | 10 | G | TRL | - | | | | | | | | | | |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | | | | | | | | | | |
| 1 | - Current Rating | | | | | | | | | | | | | | | | |
| 2 | - C = Common Cathode | | | | | | | | | | | | | | | | |
| 3 | - Package W = D-PAK | | | | | | | | | | | | | | | | |
| 4 | - Q = Schottky Q Series | | | | | | | | | | | | | | | | |
| 5 | - Voltage Rating: Code x 10 = V_{RRM} (10 = 100V) | | | | | | | | | | | | | | | | |
| 6 | - Schottky Generation | | | | | | | | | | | | | | | | |
| 7 | - <ul style="list-style-type: none"> • None = Tube (75 pieces) • TR = Tape & Reel • TRL = Tape & Reel (Left Oriented) • TRR = Tape & Reel (Right Oriented) | | | | | | | | | | | | | | | | |
| 8 | - <ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free | | | | | | | | | | | | | | | | |

Data and specifications subject to change without notice.
This product has been designed for Q101.
Qualification Standards can be found on IR's Web site.