





VDSL TRANSFORMERS

For Use with Broadcom® BCM 6010/6020

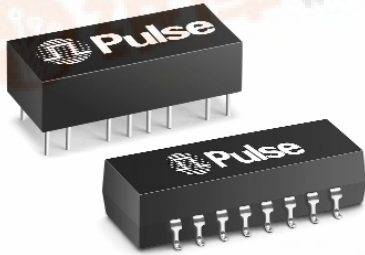

-  Supports speeds up to 25.92 Mbps
-  Provides two-wire to four-wire conversion
-  Surface mount or through hole package

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Turns Ratio		DCR (MAX)	Return Loss (dB MIN)	Insertion Loss* (dB MAX)	Transhybrid Loss (dB MIN)	Longitudinal Balance (dB MIN)	Isolation Voltage (Vrms)
	Trans.	Rec.						
B4008 (THT) B4025 (SMT)	2:1	1:1	0.5 Ω	138 kHz to 1 MHz: 13.5	138 kHz to 20 MHz: 0.5	138 kHz to 1 MHz: 30	138 kHz to 300 kHz: 60	2000
				1 MHz to 20 MHz: 20		1 MHz to 20 MHz: 25	300 kHz to 1 MHz: 50	


NOTE: Common Mode Chokes to reduce common mode ingress from AM Broadcast or HAM Radios are available. See data sheet B912 for parts B4001 and B4003.

Surge Voltage Capability: Metallic: 800 Vpeak 10/560 μsec. Long.: 2400 Vpeak 10/700 μsec.

Surge over the Extended Temperature Range: Insertion Loss can increase to 1 dB. Return Loss can drop to 7 dB from 138 kHz to 300 kHz, and 12 dB from 300 kHz to 1 MHz.

Mechanicals

B4008

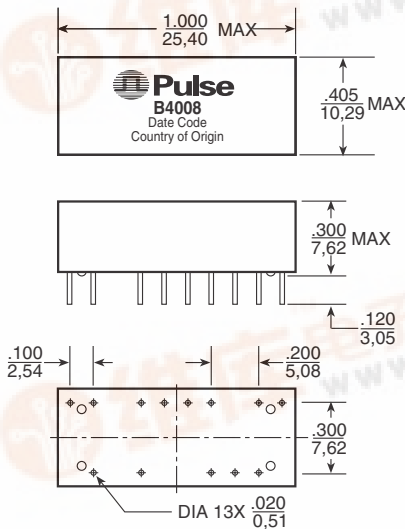


Weight.....2.8 grams
Tube.....20/tube

Dimensions: Inches
mm


Unless otherwise specified, all tolerances are ± .010 / 0.25

B4025

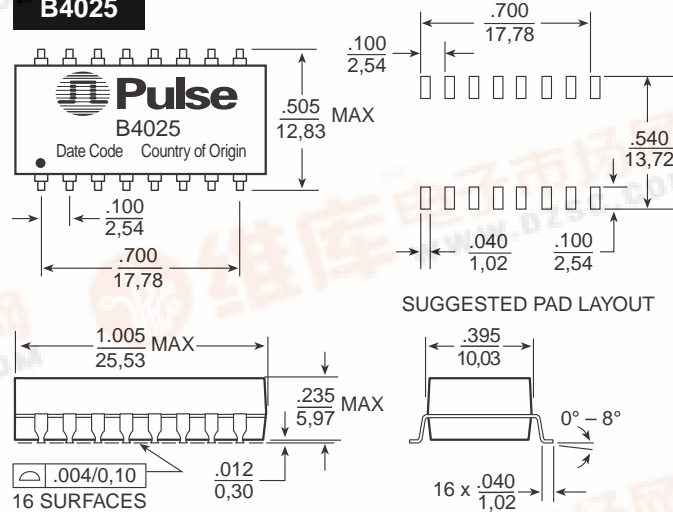


Schematics

B4008



B4025



For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
http://www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang
Shatin Warehouse Centre
6 Wong Chuk Yeung Street
Fotan, Shatin, Hong Kong
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR