



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

TO-92 Plastic-Encapsulate Transistors

BC350 TRANSISTOR (PNP)

FEATURES

Power dissipation

 P_{CM} : 0.3 W ($T_{amb}=25$)


Collector current

 I_{CM} : -0.1 A

Collector-base voltage

 $V_{(BR)CBO}$: -50 V

Operating and storage junction temperature range

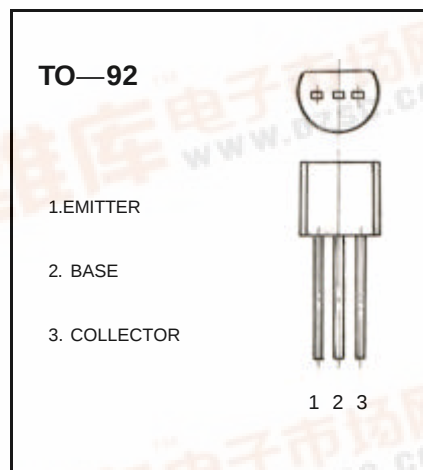 T_J , T_{stg} : -55 to +150

ELECTRICAL CHARACTERISTICS ($T_{amb}=25$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100 \mu A$, $I_E = 0$	-50			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -1mA$, $I_B = 0$	-45			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100 \mu A$, $I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -50V$, $I_E = 0$			-0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -35V$, $I_B = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -3V$, $I_C = 0$			-0.1	μA
DC current gain	h_{FE}	$V_{CE} = -5V$, $I_C = -2mA$	40		450	
Collector-emitter saturation voltage	V_{CEsat}	$I_C = -10mA$, $I_B = -1mA$			-0.3	V
Base-emitter saturation voltage	V_{BEsat}	$I_C = -10mA$, $I_B = -1mA$			-1	V
Transition frequency	f_T	$V_{CE} = -5V$, $I_C = -10mA$, $f = 30MHz$	125			MHz

Typical Characteristics

BC350

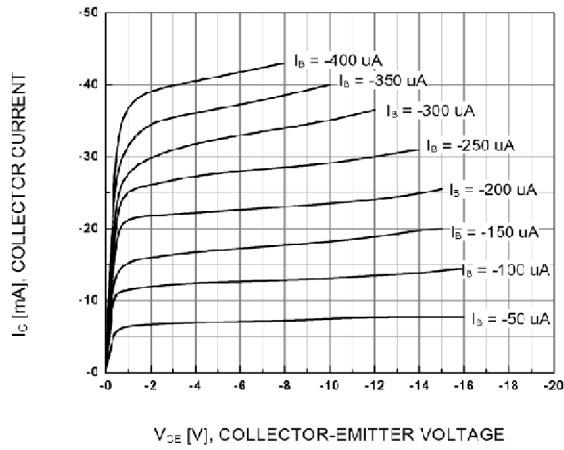


Figure 1. Static Characteristic



Figure 2. DC current Gain

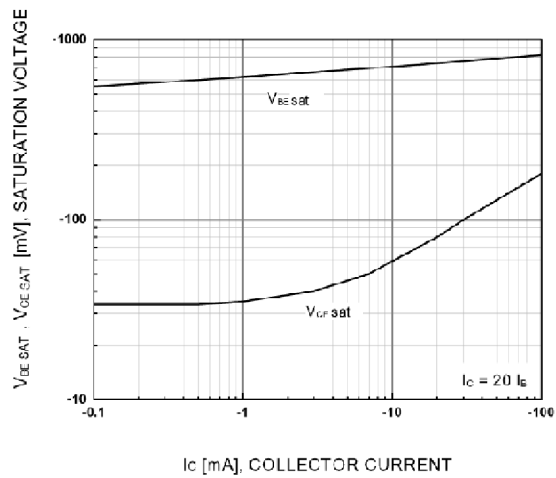


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

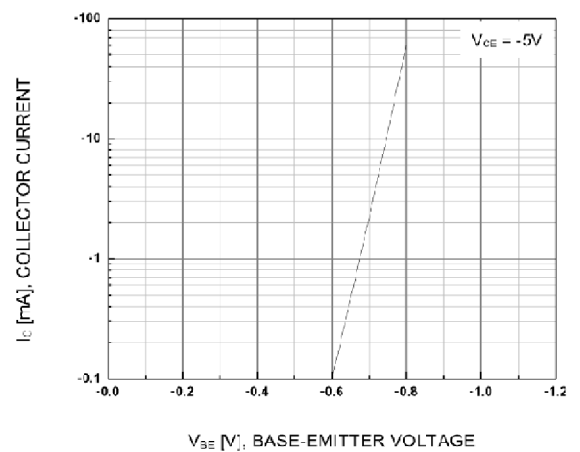


Figure 4. Base-Emitter On Voltage

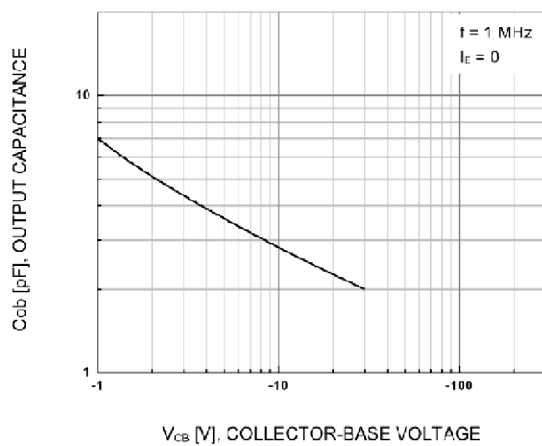


Figure 5. Collector Output Capacitance



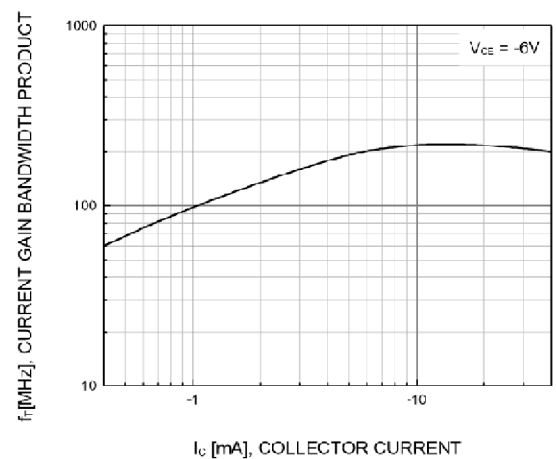


Figure 6. Current Gain Bandwidth Product

TO-92 PACKAGE OUTLINE DIMENSIONS

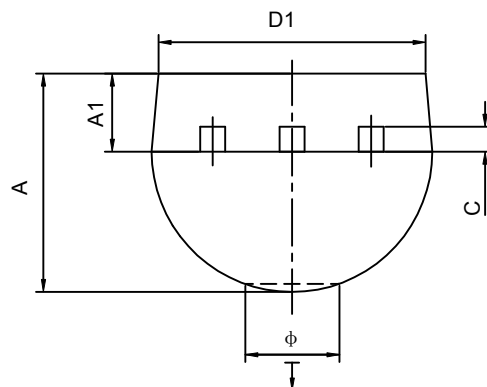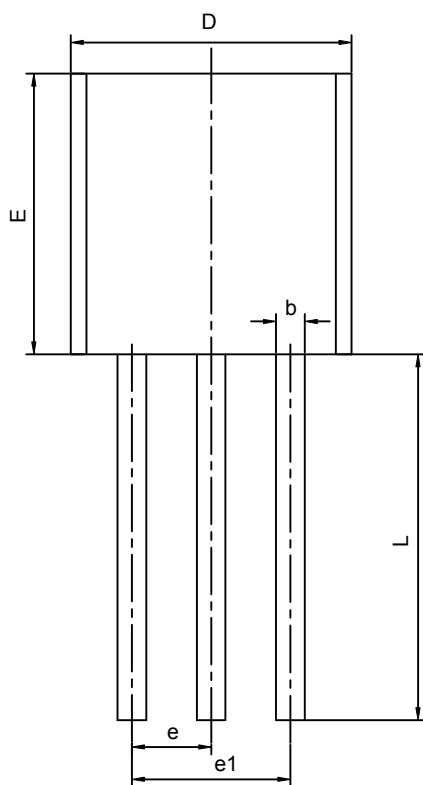

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270TYP		0.050TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Ö		1.600		0.063
$\downarrow$	0.000	0.380	0.000	0.015