



Current Sense Transformer

EPA225

- Designed for Switching Supply-Current Sense Applications
- High Primary Current Applications
- UL1446 Class B Insulating System
- UL94V0 Recognized Materials


Electrical Parameters @ 25° C

OCL (mH Nom.)	Turns Ratio	DCR (Ω Max.)
@ 10 KHz		
25	1:100	1.4

Schematic



Package

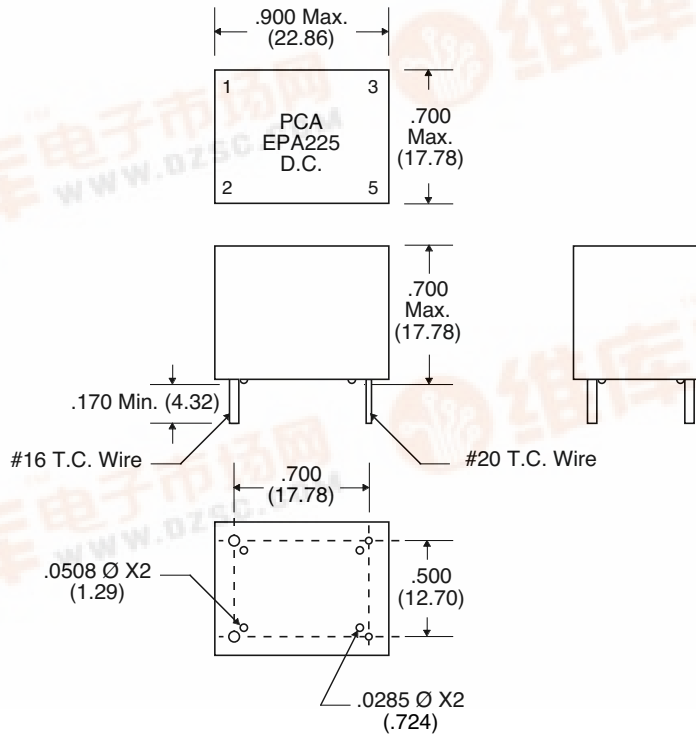

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25

Product performance is limited to specified parameters. Data is subject to change without prior notice.

CSA225 Rev. A1 2/26/04 FT

TEL: (818) 892-0761

FAX: (818) 894-5791

