

FAIRCHILD
SEMICONDUCTOR®

January 2006

FDS6679AZ

P-Channel PowerTrench® MOSFET

-30V, -13A, 9mΩ

General Description



This P-Channel MOSFET is produced using Fairchild Semiconductor's advanced PowerTrench process that has been especially tailored to minimize the on-state resistance.

This device is well suited for Power Management and load switching applications common in Notebook Computers and Portable Battery Packs.



Features

- Max $r_{DS(on)}$ = 9.3mΩ at $V_{GS} = -10V$, $I_D = -13A$
- Max $r_{DS(on)}$ = 14.8mΩ at $V_{GS} = -4.5V$, $I_D = -11A$
- Extended V_{GS} range (-25V) for battery applications
- HBM ESD protection level of 6kV typical (note 3)
- High performance trench technology for extremely low $r_{DS(on)}$
- High power and current handling capability
- RoHS Compliant



MOSFET Maximum Ratings $T_A = 25^\circ C$ unless otherwise noted

| Symbol | Parameter | Ratings | Units |
|----------------|--|-------------|-------|
| V_{DS} | Drain to Source Voltage | -30 | V |
| V_{GS} | Gate to Source Voltage | ±25 | V |
| I_D | Drain Current -Continuous (Note 1a) | -13 | A |
| | -Pulsed | -65 | |
| P_D | Power Dissipation for Single Operation (Note 1a) | 2.5 | W |
| | (Note 1b) | 1.2 | |
| | (Note 1c) | 1.0 | |
| T_J, T_{STG} | Operating and Storage Temperature | -55 to +150 | °C |




Thermal Characteristics

| | | | |
|-----------------|---|----|------|
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient (Note 1a) | 50 | °C/W |
| $R_{\theta JC}$ | Thermal Resistance, Junction to Case (Note 1) | 25 | °C/W |

Package Marking and Ordering Information

| Device Marking | Device | Reel Size | Tape Width | Quantity |
|----------------|-----------|-----------|------------|------------|
| FDS6679AZ | FDS6679AZ | 13" | 12mm | 2500 units |



| Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted | | | | | | | | |
|--|--|--|---|------|---|---|--|--|
| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units | | |
| Off Characteristics | | | | | | | | |
| B_{VDSS} | Drain to Source Breakdown Voltage | $I_D = -250\mu\text{A}, V_{GS} = 0\text{V}$ | -30 | | | V | | |
| $\frac{\Delta B_{VDSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = -250\mu\text{A}$, referenced to 25°C | | -20 | | mV/ $^\circ\text{C}$ | | |
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{DS} = -24\text{V}, V_{GS} = 0\text{V}$ | | | -1 | μA | | |
| I_{GSS} | Gate to Source Leakage Current | $V_{GS} = \pm 25\text{V}, V_{DS} = 0\text{V}$ | | | ± 10 | μA | | |
| On Characteristics (Note 2) | | | | | | | | |
| $V_{GS(th)}$ | Gate to Source Threshold Voltage | $V_{GS} = V_{DS}, I_D = -250\mu\text{A}$ | -1 | -1.9 | -3 | V | | |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate to Source Threshold Voltage Temperature Coefficient | $I_D = -250\mu\text{A}$, referenced to 25°C | | 6.5 | | mV/ $^\circ\text{C}$ | | |
| $r_{DS(on)}$ | Drain to Source On Resistance | $V_{GS} = -10\text{V}, I_D = -13\text{A}$ | | 7.7 | 9.3 | m Ω | | |
| | | $V_{GS} = -4.5\text{V}, I_D = -11\text{A}$ | | 11.8 | 14.8 | | | |
| | | $V_{GS} = -10\text{V}, I_D = -13\text{A}, T_J = 125^\circ\text{C}$ | | 10.7 | 13.4 | | | |
| g_{FS} | Forward Transconductance | $V_{DS} = -5\text{V}, I_D = -13\text{A}$ | | 55 | | S | | |
| Dynamic Characteristics | | | | | | | | |
| C_{iss} | Input Capacitance | $V_{DS} = -15\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$ | | 2890 | 3845 | pF | | |
| C_{oss} | Output Capacitance | | | 500 | 665 | pF | | |
| C_{rss} | Reverse Transfer Capacitance | | | 495 | 745 | pF | | |
| Switching Characteristics (Note 2) | | | | | | | | |
| $t_{d(on)}$ | Turn-On Delay Time | $V_{DD} = -15\text{V}, I_D = -1\text{A}, V_{GS} = -10\text{V}, R_{GS} = 6\Omega$ | | 13 | 24 | ns | | |
| t_r | Rise Time | | | 15 | 27 | ns | | |
| $t_{d(off)}$ | Turn-Off Delay Time | | | 210 | 336 | ns | | |
| t_f | Fall Time | | | 92 | 148 | ns | | |
| Q_g | Total Gate Charge | $V_{DS} = -15\text{V}, V_{GS} = -10\text{V}, I_D = -13\text{A}$ | | 68 | 96 | nC | | |
| Q_g | Total Gate Charge | $V_{DS} = -15\text{V}, V_{GS} = -5\text{V}, I_D = -13\text{A}$ | | 38 | 54 | nC | | |
| Q_{gs} | Gate to Source Gate Charge | | | 10 | | nC | | |
| Q_{gd} | Gate to Drain Charge | | | 17 | | nC | | |
| Drain-Source Diode Characteristic | | | | | | | | |
| V_{SD} | Source to Drain Diode Forward Voltage | $V_{GS} = 0\text{V}, I_S = -2.1\text{A}$ | | -0.7 | -1.2 | V | | |
| t_{rr} | Reverse Recovery Time | $I_F = -13\text{A}, di/dt = 100\text{A}/\mu\text{s}$ | | | 40 | ns | | |
| Q_{rr} | Reverse Recovery Charge | $I_F = -13\text{A}, di/dt = 100\text{A}/\mu\text{s}$ | | | -31 | nC | | |
| Notes: | | | | | | | | |
| 1: $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design. | | | | | | | | |
|  | | a) 50°C/W when mounted on a 1 in ² pad of 2 oz copper |  | | b) 105°C/W when mounted on a .04 in ² pad of 2 oz copper |  | | c) 125°C/W when mounted on a minimum pad |
| Scale 1 : 1 on letter size paper | | | | | | | | |
| 2: Pulse Test: Pulse Width <300 μs , Duty Cycle <2.0% | | | | | | | | |
| 3: The diode connected between the gate and source serves only as protection against ESD. No gate overvoltage rating is implied. | | | | | | | | |

Typical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

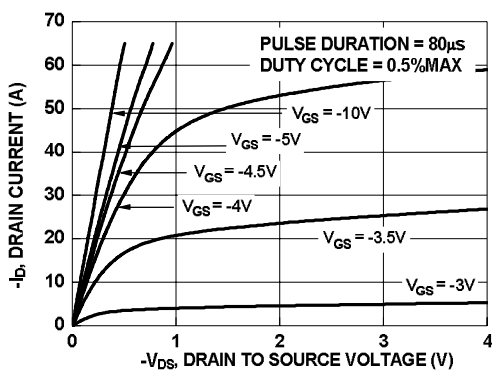


Figure 1. On Region Characteristics

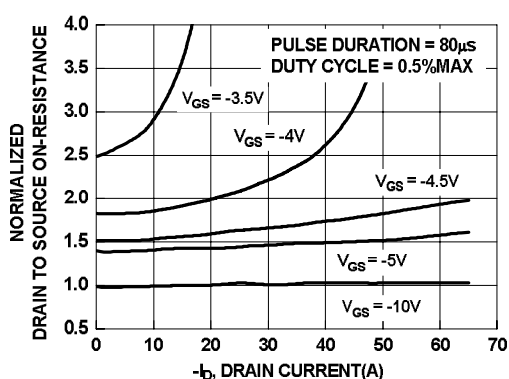


Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage

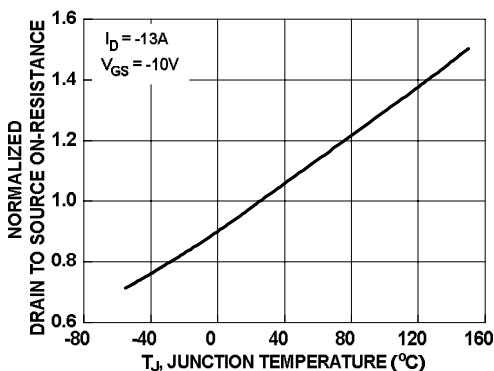


Figure 3. Normalized On Resistance vs Junction Temperature

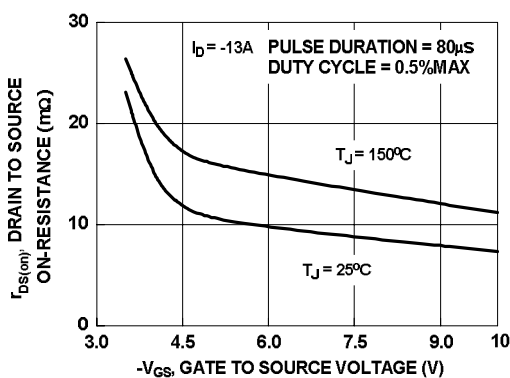


Figure 4. On-Resistance vs Gate to Source Voltage

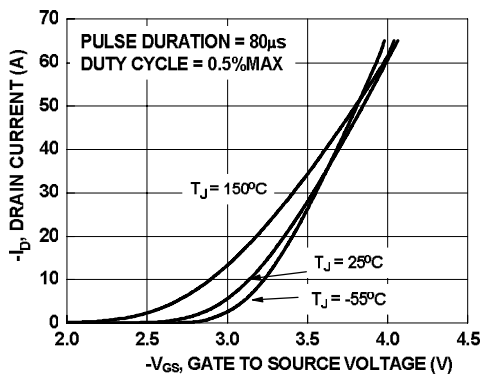


Figure 5. Transfer Characteristics

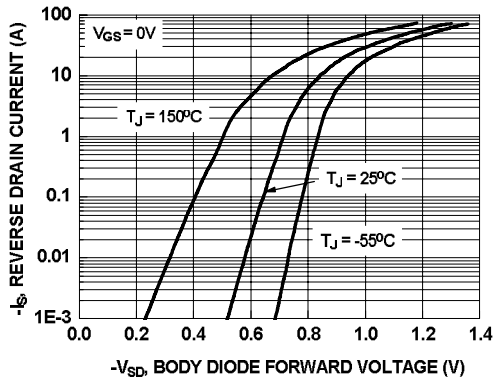


Figure 6. Source to Drain Diode Forward Voltage vs Source Current

Typical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

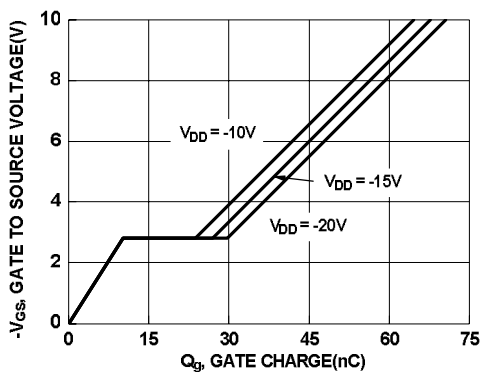


Figure 7. Gate Charge Characteristics

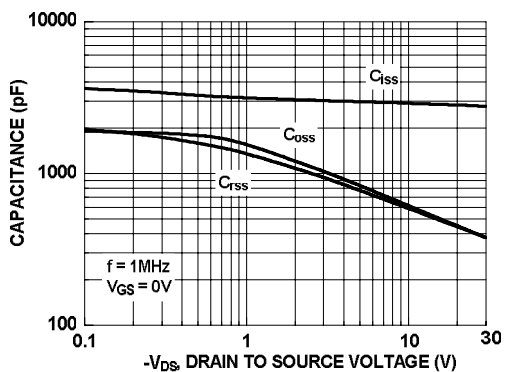


Figure 8. Capacitance vs Drain to Source Voltage

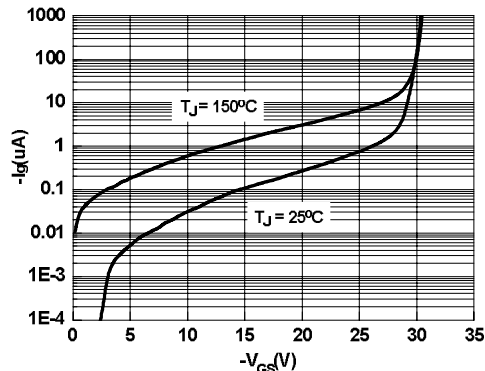


Figure 9. I_g vs V_{GS}

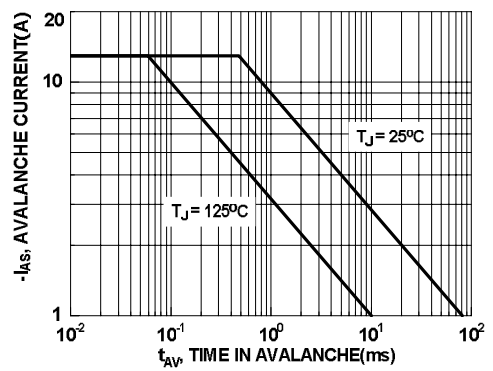


Figure 10. Unclamped Inductive Switching Capability

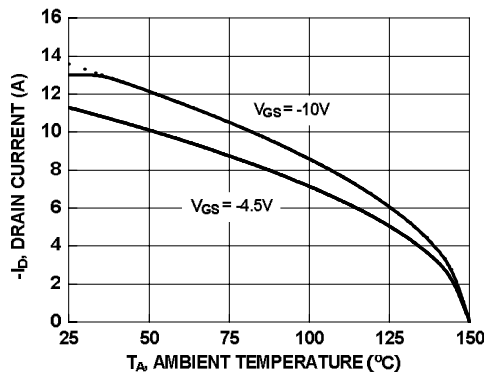


Figure 11. Maximum Continuous Drain Current vs Ambient Temperature

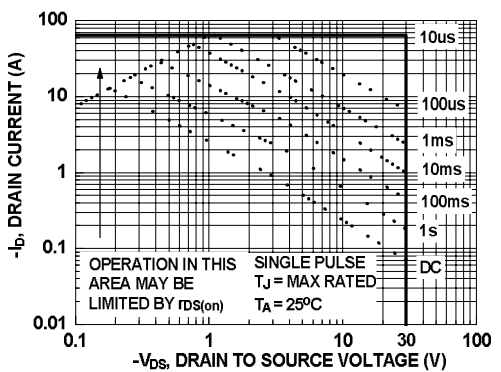


Figure 12. Forward Bias Safe Operating Area

Typical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

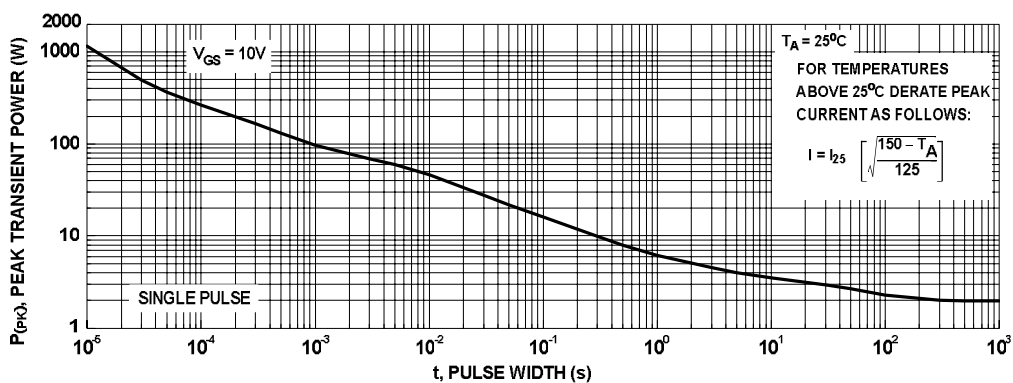


Figure 13. Single Pulse Maximum Power Dissipation

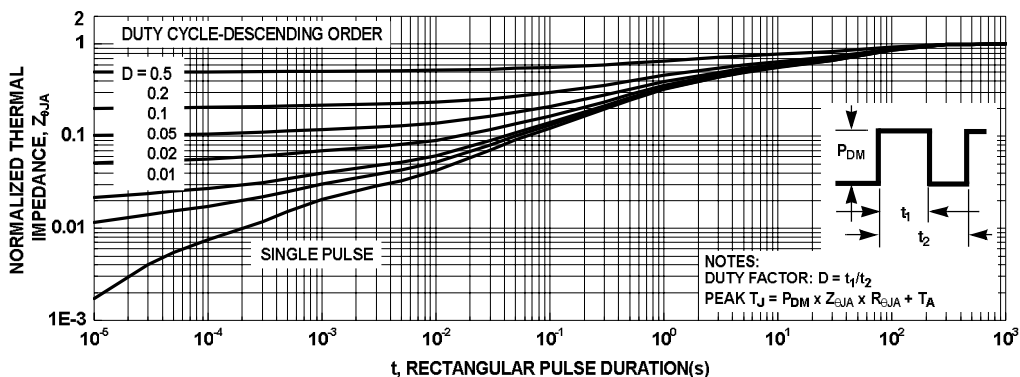


Figure 14. Transient Thermal Response Curve

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| | | | | |
|---|----------------------------------|----------------------------|----------------------------------|------------------------------|
| ACE ^x TM | FAST [®] | ISOPLANAR TM | PowerSaver TM | SuperSOT TM -6 |
| ActiveArray TM | FAST ^r TM | LittleFET TM | PowerTrench [®] | SuperSOT TM -8 |
| Bottomless TM | FPST TM | MICROCOUPLER TM | QFET [®] | SyncFET TM |
| Build it Now TM | FRFET TM | MicroFET TM | QST TM | TinyLogic [®] |
| CoolFET TM | GlobalOptoisolator TM | MicroPak TM | QT Optoelectronics TM | TINYOPTO TM |
| CROSSVOL ^T TM | GTO TM | MICROWIRE TM | Quiet Series TM | TruTranslation TM |
| DOME TM | HiSeC TM | MSX TM | RapidConfigure TM | UHC TM |
| EcoSPARK TM | I ² C TM | MSXPro TM | RapidConnect TM | UltraFET [®] |
| E ² CMOS TM | i-Lo TM | OCX TM | μSerDes TM | UniFET TM |
| EnSigna TM | ImpliedDisconnect TM | OCXPro TM | ScalarPump TM | VCX TM |
| FACT TM | IntelliMAX TM | OPTOLOGIC [®] | SILENT SWITCHER [®] | Wire TM |
| FACT Quiet Series TM | | OPTOPLANAR TM | SMART START TM | |
| | | PACMAN TM | SPM TM | |
| Across the board. Around the world. TM | | POP TM | Stealth TM | |
| The Power Franchise [®] | | Power247 TM | SuperFET TM | |
| Programmable Active Droop TM | | PowerEdge TM | SuperSOT TM -3 | |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|------------------------|---|
| Advance Information | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| Obsolete | Not In Production | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only. |

Rev. 117