



## 1A Low-Dropout Linear Regulator

### Features

- Available in 1.5V, 1.8V, 2.5V, 3.3V, 3.5V Version
- Space Saving SOT-223 Package
- Internal Short Circuit Current Limiting
- Internal Over Temperature Protection
- Output Current in Excess of 1A

### Applications

- Post Regulation for Switching DC/DC Converter
- High Efficiency Linear Regulator
- Battery Charger
- Battery Powered Instrumentation
- Motherboard

### General Description

The G1117-XX is a low dropout linear regulator with a dropout of 1.3V at 1A of load current. It is available in four fixed voltage: 1.5V, 1.8V, 2.5V, 3.3 and 3.5V versions.

The G1117-XX provides over temperature and over current protection circuits to prevent it from being damaged by abnormal operating conditions.

The G1117-XX is available in SOT-223 packages. A minimum of 10µF tantalum electrolytic capacitor is required at the output to improve the transient response and stability.


### Ordering Information

ORDER NUMBER	ORDER NUMBER (Pb free)	MARKING	TEMP. RANGE	PACKAGE	PIN OPTION		
					1	2	3
G1117-15T43U	G1117-15T43Uf	1117-15	-40°C~85°C	TO-252	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-18T43U	G1117-18T43Uf	1117-18	-40°C~85°C	TO-252	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-25T43U	G1117-25T43Uf	1117-25	-40°C~85°C	TO-252	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-33T43U	G1117-33T43Uf	1117-33	-40°C~85°C	TO-252	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-35T43U	G1117-35T43Uf	1117-35	-40°C~85°C	TO-252	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-15T63U	G1117-15T63Uf	1117-15	-40°C~85°C	SOT-223	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-18T63U	G1117-18T63Uf	1117-18	-40°C~85°C	SOT-223	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-25T63U	G1117-25T63Uf	1117-25	-40°C~85°C	SOT-223	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-33T63U	G1117-33T63Uf	1117-33	-40°C~85°C	SOT-223	GND	V <sub>OUT</sub>	V <sub>IN</sub>
G1117-35T63U	G1117-35T63Uf	1117-35	-40°C~85°C	SOT-223	GND	V <sub>OUT</sub>	V <sub>IN</sub>

\* For other package types and pin options, please contact us at sales@gmt.com.tw

### Order Number Identification

GXXXX-XX XX X X

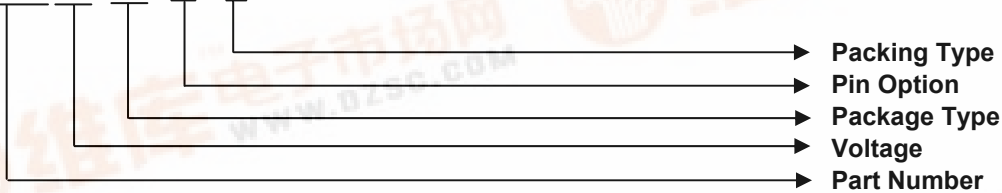

#### PACKAGE TYPE

T4: TO-252  
T6: SOT-223


#### PIN OPTION

1 2 3  
3: GND V<sub>OUT</sub> V<sub>IN</sub>

#### PACKING


U : Tape & Reel

### Package Type

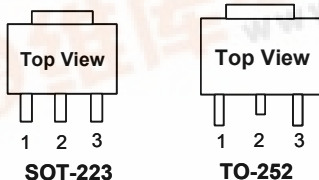

### Typical Application

[Note 4]: Type of C<sub>OUT</sub>

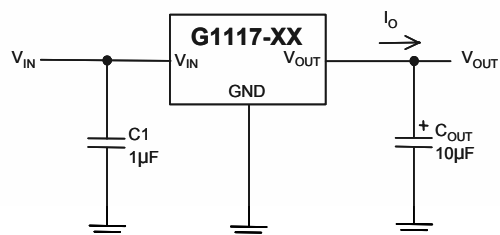

**Absolute Maximum Ratings** (Note 1)

Input Voltage	7V
Power Dissipation Internally Limited	(Note 2)
Maximum Junction Temperature	150°C
Storage Temperature Range	-65°C ≤ T <sub>J</sub> ≤ +150°C
Reflow Temperature (soldering, 10sec)	260°C
Thermal Resistance Junction to Ambient, (θ <sub>JA</sub> )	
SOT-223 <sup>(1)</sup>	116°C/W
TO-252 <sup>(1)</sup>	86°C/W
Thermal Resistance Junction to Case, (θ <sub>JC</sub> )	
SOT-223	21°C/W
TO-252	10°C/W

Note <sup>(1)</sup>: See Recommended Minimum Footprint

**Operating Conditions** (Note 1)

Input Voltage	3V~6V
Temperature Range	-40°C ≤ T <sub>A</sub> ≤ 85°C

**Electrical Characteristics**

Operating Conditions: V<sub>IN</sub> ≤ 6V, T<sub>J</sub> = 25°C unless otherwise specified. [Note3]

PARAMETER	CONDITION	MIN	TYP	MAX	UNIT
Output Voltage	10mA ≤ I <sub>OUT</sub> ≤ 1A	2%	V <sub>O</sub>	3%	V
Line Regulation	(V <sub>OUT</sub> + 1.5V) ≤ V <sub>IN</sub> ≤ 6V, I <sub>OUT</sub> = 10mA	---	3	30	mV
Load Regulation	V <sub>IN</sub> = 5V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	---	35	50	mV
Dropout Voltage	ΔV <sub>OUT</sub> = 2%, I <sub>OUT</sub> = 1A	---	1.3	1.4	V
Short Circuit Current		---	1.6	---	A
Quiescent Current		0.3	0.6	1.5	mA
Ripple Rejection	f = 120Hz, C <sub>OUT</sub> = 10μF Tantalum, V <sub>ripple</sub> = 2V <sub>P-P</sub> , I <sub>OUT</sub> = 100mA	---	50	---	dB
Thermal Resistor Junction-to-Ambient (No heat sink; No air flow)	SOT-223; Recommended Minimum Footprint	---	116	---	°C/W
Thermal Shutdown	Junction Temperature	---	150	---	°C

**Note 1:** Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Conditions are conditions under which the device functions but the specifications might not be guaranteed. For guaranteed specifications and test conditions see the Electrical Characteristics.

**Note2:** The maximum power dissipation is a function of the maximum junction temperature, T<sub>Jmax</sub>; total thermal resistance, θ<sub>JA</sub>, and ambient temperature T<sub>A</sub>. The maximum allowable power dissipation at any ambient temperature is T<sub>Jmax</sub>-T<sub>A</sub> / θ<sub>JA</sub>. If this dissipation is exceeded, the die temperature will rise above 150°C and IC will go into thermal shutdown. For the G1117-XX in SOT-223 package; θ<sub>JA</sub> is 116°C/W; in the TO-252 package, θ<sub>JA</sub> is 86°C/W (See recommend minimum footprint). The safe operation in SOT-223, TO-252 package, it can see "Typical Performance Characteristics" (Safe Operating Area).

**Note3:** Low duty pulse techniques are used during test to maintain junction temperature as close to ambient as possible.

**Note4:** The type of output capacitor should be tantalum or aluminum.

**Definitions****Output Voltage**

The G1117-XX provides in four fixed voltages = 1.5V, 1.8V, 2.5V, 3.3V and 3.5V. Its quiescent current is typically 600μA.

**Dropout Voltage**

The input/output Voltage differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal value. Dropout voltage is affected by junction temperature, load current and minimum input supply requirements.

**Line Regulation**

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

**Load Regulation**

The change in output voltage for a change in load current at constant chip temperature. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

**Maximum Power Dissipation**

The maximum total device dissipation for which the regulator will operate within specifications.

**Quiescent Bias Current**


Current which is used to operate the regulator chip and is not delivered to the load.




## Typical Performance Characteristics

$V_{IN}=5V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=10\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.  
(G1117-25)


### Line Transient

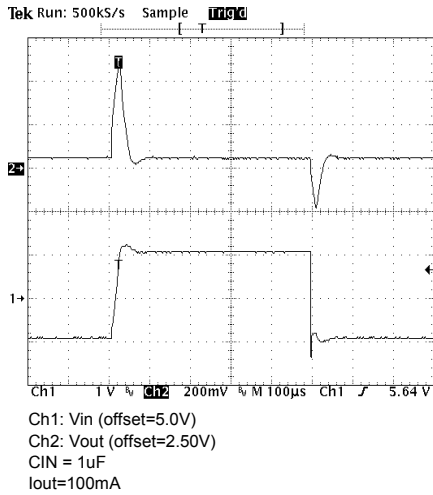


### Load Transient

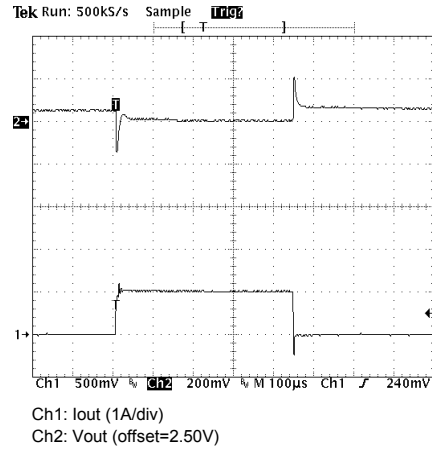


### Output Voltage vs. Load Current

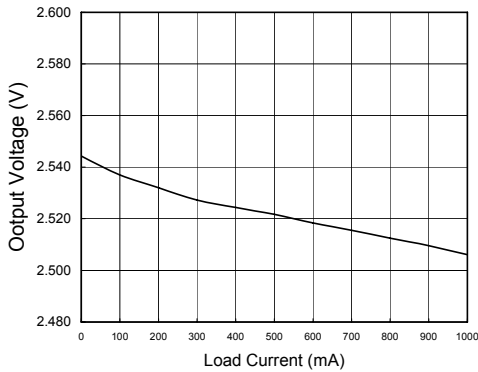

### Dropout Voltage vs. Load Current

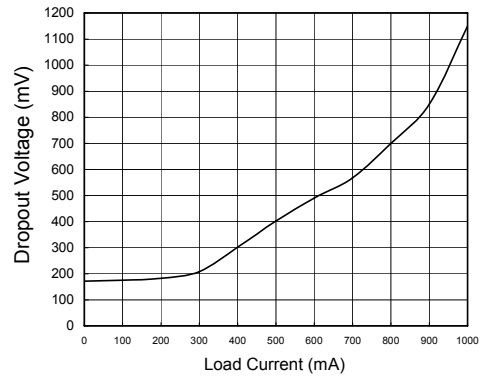


### Ground Current vs. Load Current

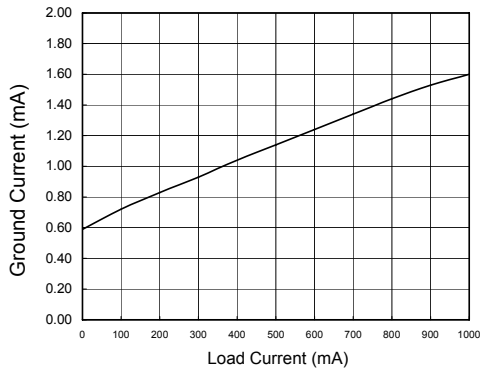




## Typical Performance Characteristics (continued)


TO-252 Max. Power Dissipation vs. PCB Top Copper Area

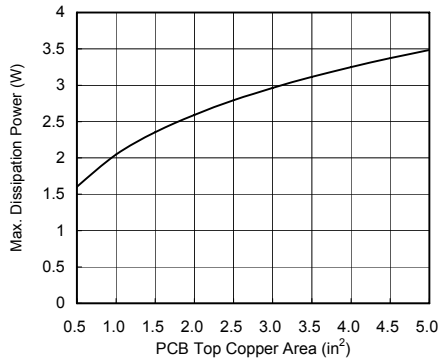


TO-252 Max. Power Dissipation vs. T<sub>AMB</sub> ( Still Air)

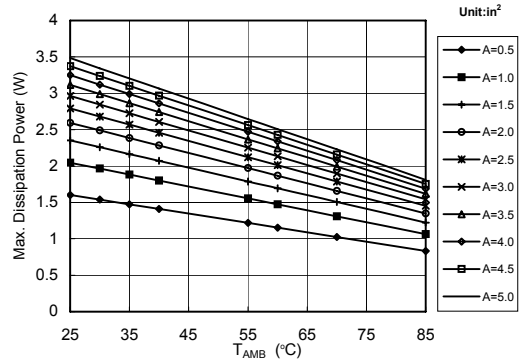


SOT-223 Max. Power Dissipation vs. PCB Top Copper Area

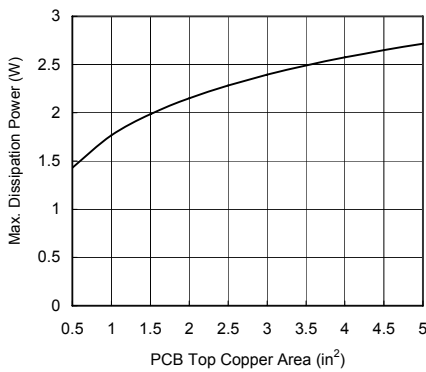

SOT-223 Max. Power Dissipation vs. T<sub>AMB</sub> ( Still Air)

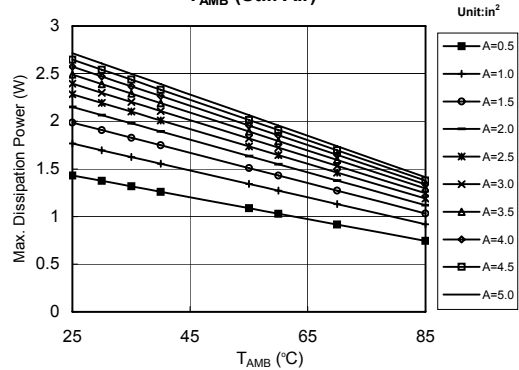


## Recommend Minimum Footprint

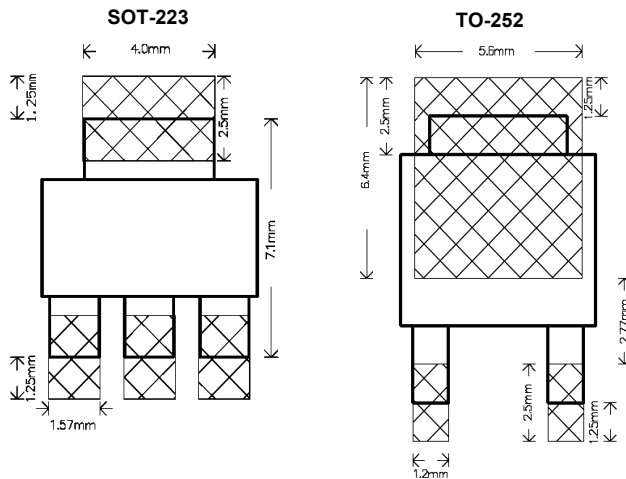






Package Information

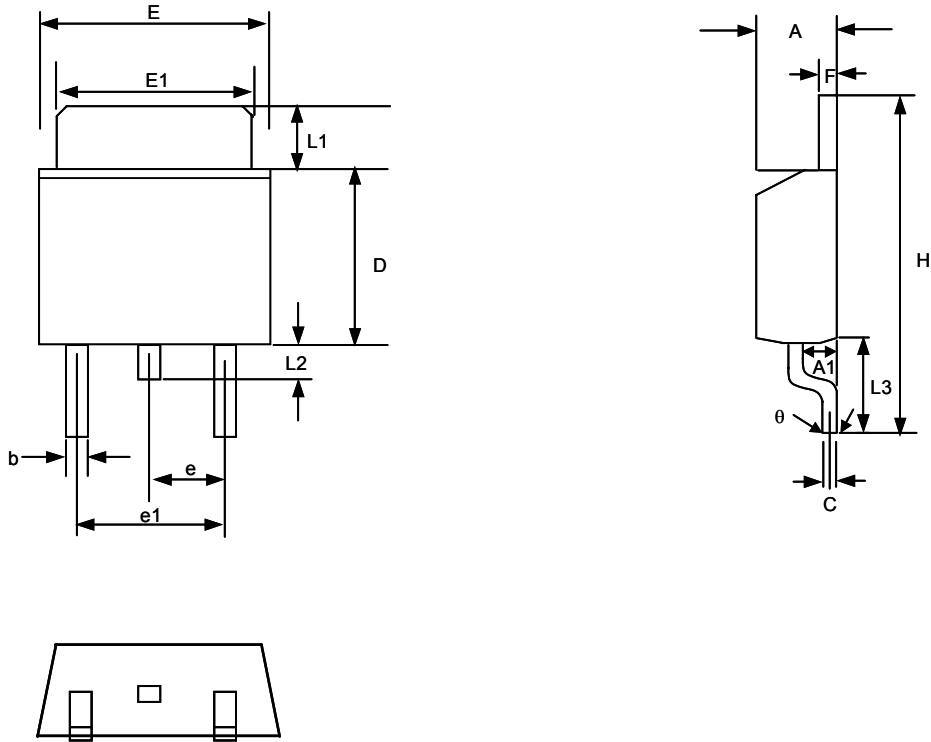

TO-252 (T4) Package


SYMBOL	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	2.19	2.38	0.086	0.094
A1	0.89	1.27	0.035	0.050
b	0.64	0.89	0.025	0.035
C	0.46	0.58	0.018	0.023
D	5.97	6.22	0.235	0.245
E	6.35	6.73	0.250	0.265
E1	5.21	5.46	0.205	0.215
e	2.26BSC		0.09BSC	
e1	3.96	5.18	0.156	0.204
F	0.46	0.58	0.018	0.023
L1	0.89	2.03	0.035	0.080
L2	0.64	1.02	0.025	0.040
L3	2.40	2.80	0.095	0.110
H	9.40	10.40	0.370	0.410
θ	0°	4°	0°	4°

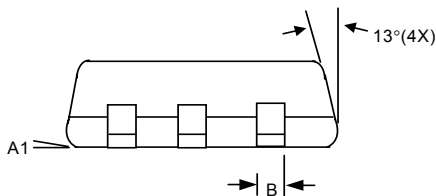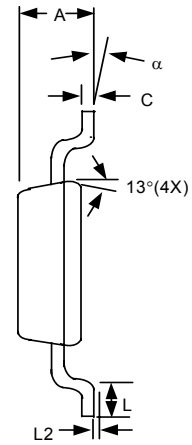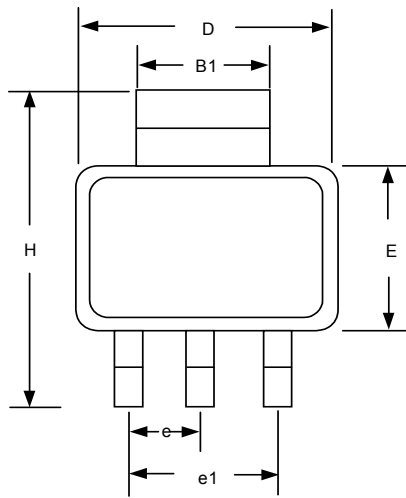

SOT-223 (T6) Package

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.55	1.80	0.061	0.071
A1	0.02	0.12	0.0008	0.0047
B	0.60	0.80	0.024	0.031
B1	2.90	3.10	0.114	0.122
C	0.24	0.32	0.009	0.013
D	6.30	6.70	0.248	0.264
E	3.30	3.70	0.130	0.146
e	2.30 BSC		0.090 BSC	
e1	4.60 BSC		0.181 BSC	
H	6.70	7.30	0.264	0.287
L	0.90 MIN		0.036 MIN	
L2	0.06 BSC		0.0024 BSC	
$\alpha$	0°	10°	0°	10°

Taping Specification

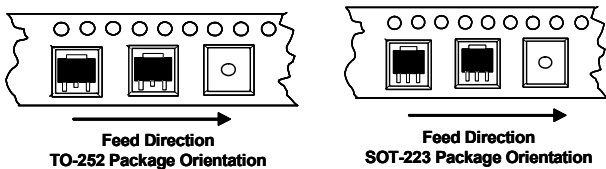

PACKAGE	Q'TY/REEL
SOT-223	2,500 ea
TO-252	2,500 ea

GMT Inc. does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and GMT Inc. reserves the right at any time without notice to change said circuitry and specifications.