



# UF4001 thru UF4008

<b>ULTRA FAST RECTIFIERS</b>	REVERSE VOLTAGE - 50 to 1000 Volts FORWARD CURRENT - 1.0 Amperes
<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>● Low cost</li> <li>● Diffused junction</li> <li>● Ultra fast switching for high efficiency</li> <li>● Low reverse leakage current</li> <li>● Low forward voltage drop</li> <li>● High current capability</li> <li>● The plastic material carries UL recognition 94V-0</li> </ul> <p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li>● Case: JEDEC DO-41 molded plastic</li> <li>● Polarity: Color band denotes cathode</li> <li>● Weight: 0.012 ounces , 0.34 grams</li> <li>● Mounting position: Any</li> </ul>	<p><b>DO- 41</b></p> <p>Dimensions in inches and (millimeters)</p>

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave ,60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	UF4001	UF4002	UF4003	UF4004	UF4005	UF4006	UF4007	UF4008	UNIT	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	V	
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	210	280	420	580	700	V	
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	V	
Maximum Average Forward Rectified Current @T <sub>A</sub> =55 °C	I <sub>(AV)</sub>	1.0								A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I <sub>FSM</sub>	30								A	
Peak Forward Voltage at 1.0A DC(Note1)	V <sub>F</sub>	1.0			1.3		1.7			V	
Maximum DC Reverse Current at Rated DC Blocking Voltage @T <sub>J</sub> =25°C @T <sub>J</sub> =100°C	I <sub>R</sub>	5.0				100					uA
Maximum Reverse Recovery Time(Note 1)	T <sub>RR</sub>	50				75				nS	
Typical Junction Capacitance (Note2)	C <sub>J</sub>	20				10				pF	
Typical Thermal Resistance (Note3)	R <sub>θJA</sub>	25								°C/W	
Operating Temperature Range	T <sub>J</sub>	-50 to +125								°C	
Storage Temperature Range	T <sub>STG</sub>	-50 to +150								°C	

NOTES: 1.Measured with I<sub>F</sub>=0.5A,I<sub>R</sub>=1A,I<sub>RR</sub>=0.25A.  
 2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC  
 3.Thermal resistance junction of ambient.



# RATING AND CHARACTERISTIC CURVES

## UF4001 thru UF4008 SERIES



FIG. 1 – FORWARD CURRENT DERATING CURVE

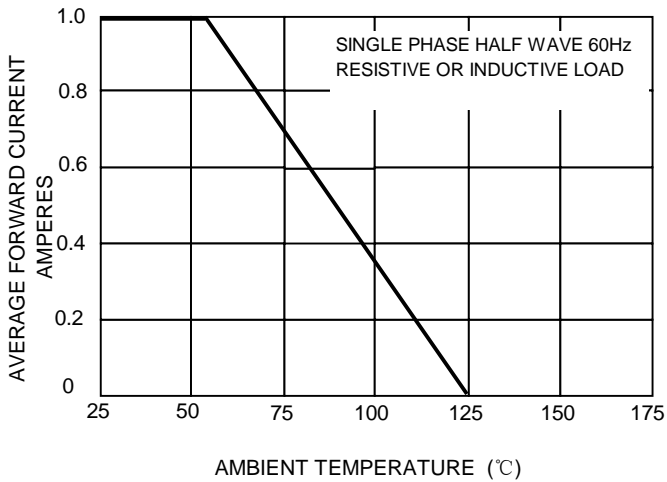


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

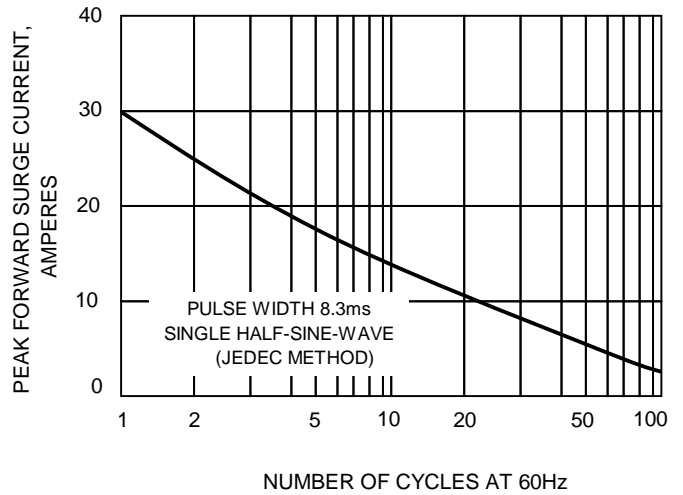


FIG.3 – TYPICAL JUNCTION CAPACITANCE

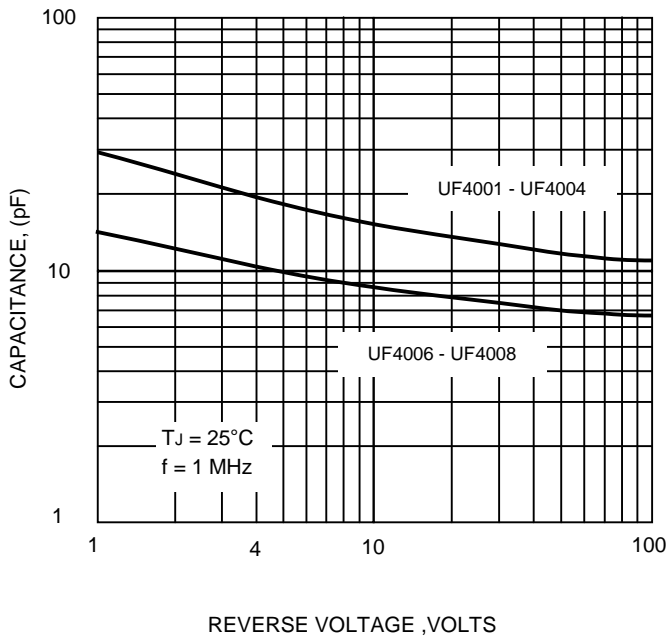


FIG.4-TYPICAL FORWARD CHARACTERISTICS

