



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- Low Current Leakage
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking : 5D

Maximum Ratings

- Operating Temperature: 150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 312°C/W Junction To Ambient


Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	V_R	75V 100V	$I_R=5\mu A$ $I_R=100\mu A$
Peak Reverse Voltage	V_{RM}	100V	
Average Rectified Forward Current	$I_{F(AV)}$	200mA	Resistive Load $f > 50Hz$
Power Dissipation	P_D	400mW	
Non-repetitive Peak Forward Surge Current	I_{FSM}	1.0A 2.0A	Pulse Width=1.0s Pulse Width=1.0μs
Forward Voltage	V_F	1.0V	$I_F=10mA$
Reverse Current	I_R	25nA 50μA 0.5μA	$V_R=20V$ $V_R=20V, T_J=150^\circ C$ $V_R=75V$
Total Capacitance	C_J	4.0pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T_{rr}	50nS	$I_F=I_R=10mA$ $I_{RR} = 3mA$ $R_L=100 OHM$

1N914W


400mW 100 Volt Small Signal Diodes

SOD-123

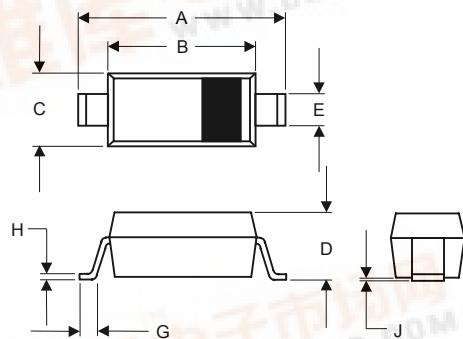

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.140	.152	3.55	3.85	
B	.100	.112	2.55	2.85	
C	.055	.071	1.40	1.80	
D	---	.053	---	1.35	
E	.012	.031	0.30	0.78	
G	.006	---	0.15	---	
H	---	.010	---	0.25	
J	---	.006	---	0.15	

SUGGESTED SOLDER PAD LAYOUT

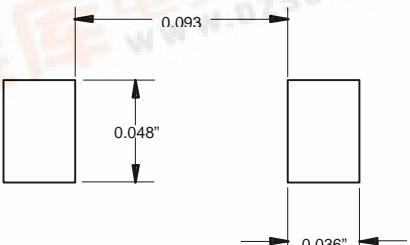



Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.

Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offered by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.