

Bulletin I27502 rev. A 05/03


# International IR Rectifier

## MT..KB SERIES

### THREE PHASE BRIDGE

### Power Modules

#### Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V<sub>RMS</sub> isolating voltage
- UL E78996 approved 

130 A  
160 A

#### Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

#### Major Ratings and Characteristics

Parameters	130MT.KB	160MT.KB	Units
I <sub>O</sub>	130 (160)	160 (200)	A
@ T <sub>C</sub>	85 (62)	85 (60)	°C
I <sub>FSM</sub>	@ 50Hz 1130	1430	A
@ 60Hz	1180	1500	A
i <sup>2</sup> t	@ 50Hz 6400	10200	A <sup>2</sup> s
@ 60Hz	5800	9300	A <sup>2</sup> s
i <sup>2</sup> √t	64000	102000	A <sup>2</sup> √s
V <sub>RRM</sub> range	800 to 1600		V
T <sub>STG</sub> range	- 40 to 150		°C
T <sub>J</sub> range	- 40 to 150		°C

## 130-160MT..KB Series

Bulletin I27502 rev. A 05/03

International  
IRF Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J$ max. mA
130-160MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

#### Forward Conduction

Parameter	130MT.KB	160MT.KB	Units	Conditions																	
$I_O$ Maximum DC output current @ Case temperature	130 (160) 85 (62)	160 (200) 85 (60)	A °C	120° Rect conduction angle																	
$I_{FSM}$ Maximum peak, one-cycle forward, non-repetitive surge current	1130 1180 950 1000	1430 1500 1200 1260	A	<table border="1"> <tr> <td>t = 10ms</td> <td>No voltage reappplied</td> <td rowspan="8">Initial <math>T_J = T_J</math> max.</td> </tr> <tr> <td>t = 8.3ms</td> <td>reappplied</td> </tr> <tr> <td>t = 10ms</td> <td>100% <math>V_{RRM}</math></td> </tr> <tr> <td>t = 8.3ms</td> <td>reappplied</td> </tr> <tr> <td>t = 10ms</td> <td>No voltage reappplied</td> </tr> <tr> <td>t = 8.3ms</td> <td>reappplied</td> </tr> <tr> <td>t = 10ms</td> <td>100% <math>V_{RRM}</math></td> </tr> <tr> <td>t = 8.3ms</td> <td>reappplied</td> </tr> </table>	t = 10ms	No voltage reappplied	Initial $T_J = T_J$ max.	t = 8.3ms	reappplied	t = 10ms	100% $V_{RRM}$	t = 8.3ms	reappplied	t = 10ms	No voltage reappplied	t = 8.3ms	reappplied	t = 10ms	100% $V_{RRM}$	t = 8.3ms	reappplied
t = 10ms	No voltage reappplied	Initial $T_J = T_J$ max.																			
t = 8.3ms	reappplied																				
t = 10ms	100% $V_{RRM}$																				
t = 8.3ms	reappplied																				
t = 10ms	No voltage reappplied																				
t = 8.3ms	reappplied																				
t = 10ms	100% $V_{RRM}$																				
t = 8.3ms	reappplied																				
$I^2t$ Maximum $I^2t$ for fusing	64000 5800 4500 4100	10200 9300 7200 6600	A <sup>2</sup> s	<table border="1"> <tr> <td>t = 10ms</td> <td>No voltage reappplied</td> <td rowspan="4">Initial <math>T_J = T_J</math> max.</td> </tr> <tr> <td>t = 8.3ms</td> <td>reappplied</td> </tr> <tr> <td>t = 10ms</td> <td>100% <math>V_{RRM}</math></td> </tr> <tr> <td>t = 8.3ms</td> <td>reappplied</td> </tr> </table>	t = 10ms	No voltage reappplied	Initial $T_J = T_J$ max.	t = 8.3ms	reappplied	t = 10ms	100% $V_{RRM}$	t = 8.3ms	reappplied								
t = 10ms	No voltage reappplied	Initial $T_J = T_J$ max.																			
t = 8.3ms	reappplied																				
t = 10ms	100% $V_{RRM}$																				
t = 8.3ms	reappplied																				
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	64000	102000	A <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reappplied																	
$V_{F(TO)1}$ Low level value of threshold voltage	0.78	0.81	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , @ $T_J$ max.																	
$V_{F(TO)2}$ High level value of threshold voltage	0.99	1.04	V	$(I > \pi \times I_{F(AV)})$ , @ $T_J$ max.																	
$r_{f1}$ Low level value of forward slope resistance	4.59	3.52	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , @ $T_J$ max.																	
$r_{f2}$ High level value of forward slope resistance	4.17	3.13	mΩ	$(I > \pi \times I_{F(AV)})$ , @ $T_J$ max.																	
$V_{FM}$ Maximum forward voltage drop	1.63	1.49	V	$I_{pk} = 200A$ , $T_J = 25^\circ C$ , $t_p = 400\mu s$ single junction																	
$V_{INS}$ RMS isolation voltage	4000	4000	V	$T_J = 25^\circ C$ , all terminal shorted f = 50Hz, t = 1s																	

#### Thermal and Mechanical Specifications

Parameter	130MT.KB	160MT.KB	Units	Conditions
$T_J$ Max. junction operating temperature range	-40 to 150		°C	
$T_{stg}$ Max. storage temperature range	-40 to 150		°C	
$R_{thJC}$ Max. thermal resistance, junction to case	0.16 0.93 0.18 1.08	0.12 0.73 0.15 0.88	K/W	DC operation per module DC operation per junction 120° Rect conduction angle per module 120° Rect conduction angle per junction
$R_{thCS}$ Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque $\pm 10\%$ to heatsink to terminal	4 to 6 3 to 4		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
wt Approximate weight	176		g	

Ordering Information Table

Device Code					
16	0	MT	160	K	B
①	②	③	④	⑤	

- 1** - Current rating code: 13 = 130 A (Avg)  
16 = 160 A (Avg)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code: Code x 10 =  $V_{RRM}$  (See Voltage Ratings Table)
- 5** - Generation II

Outline Table (without optional barriers)

Screws M5 x 0.8 Length 10

All dimensions in millimeters (inches)

**NOTE: To order the Optional Hardware see Bulletin I27900**

# 130-160MT..KB Series

Bulletin I27502 rev. A 05/03



## Outline Table (with optional barriers)

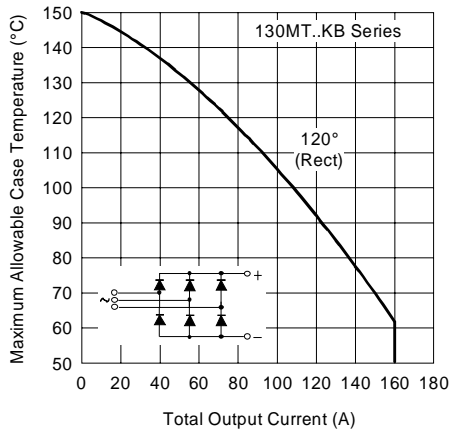
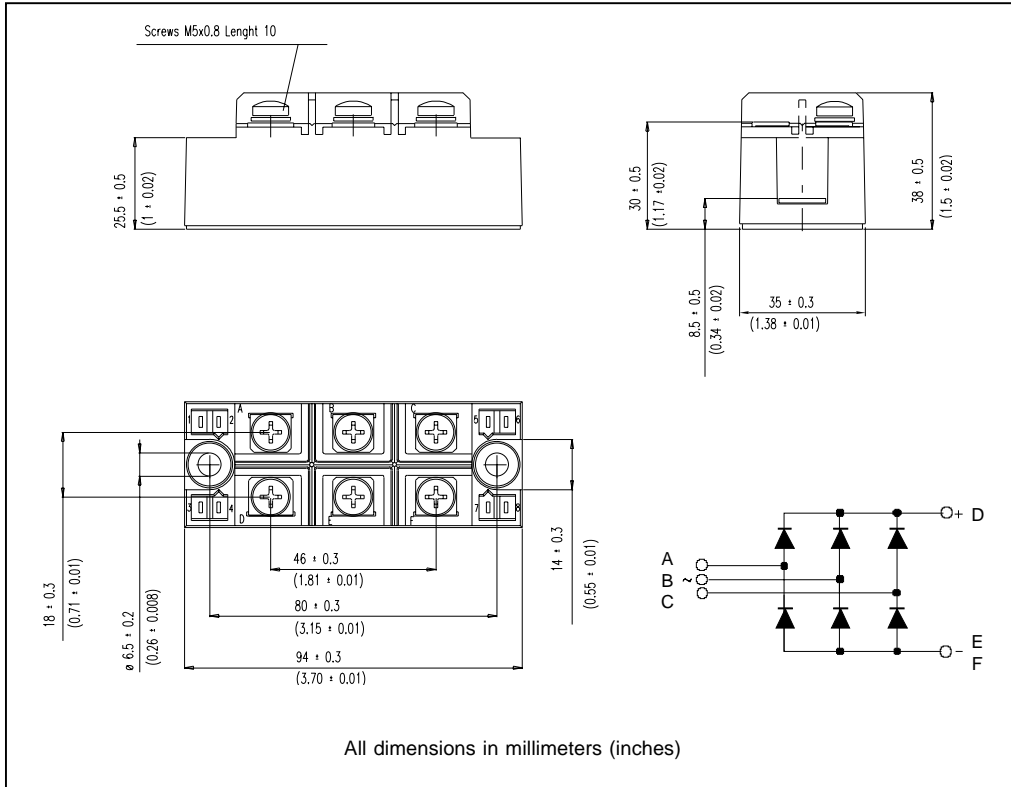


Fig. 1 - Current Ratings Characteristics

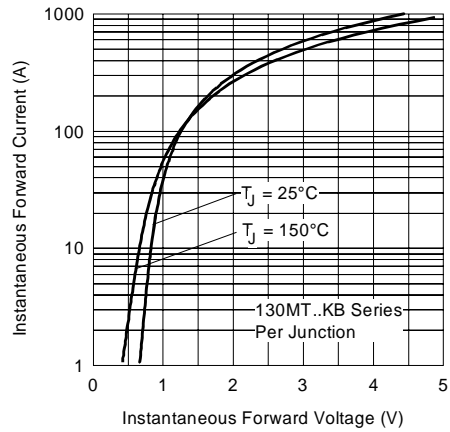


Fig. 2 - Forward Voltage Drop Characteristics

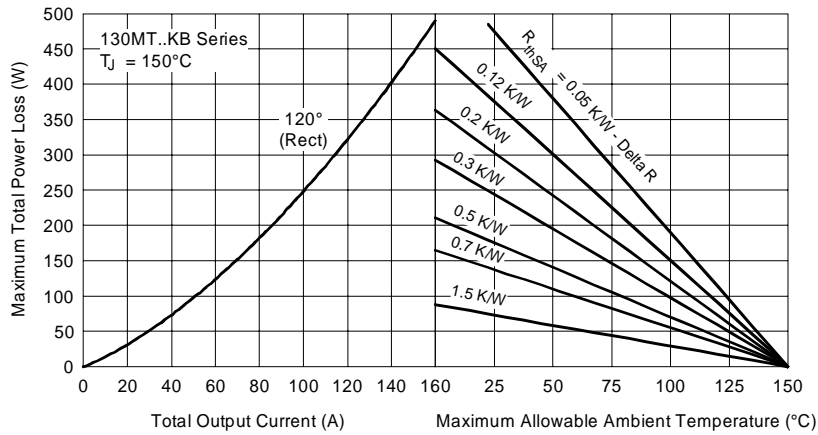


Fig. 3 - Total Power Loss Characteristics

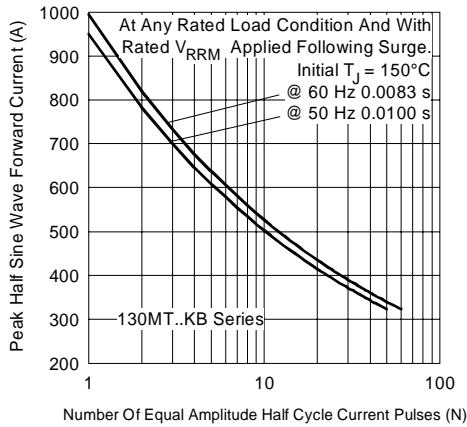


Fig. 4 - Maximum Non-Repetitive Surge Current

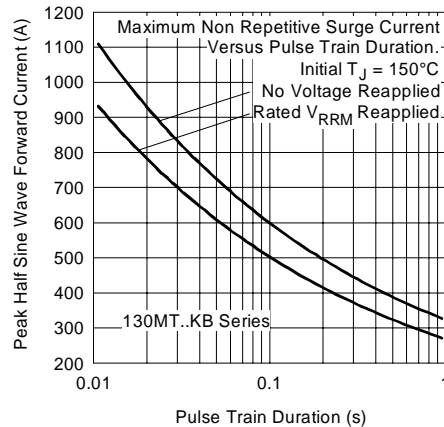


Fig. 5 - Maximum Non-Repetitive Surge Current

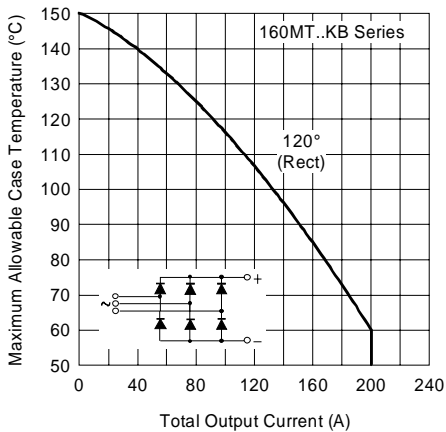


Fig. 6 - Current Ratings Characteristics

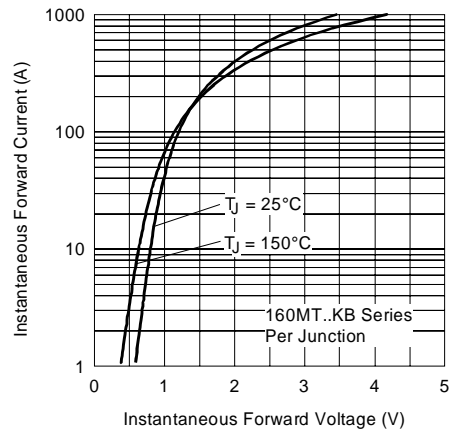


Fig. 7 - Forward Voltage Drop Characteristics

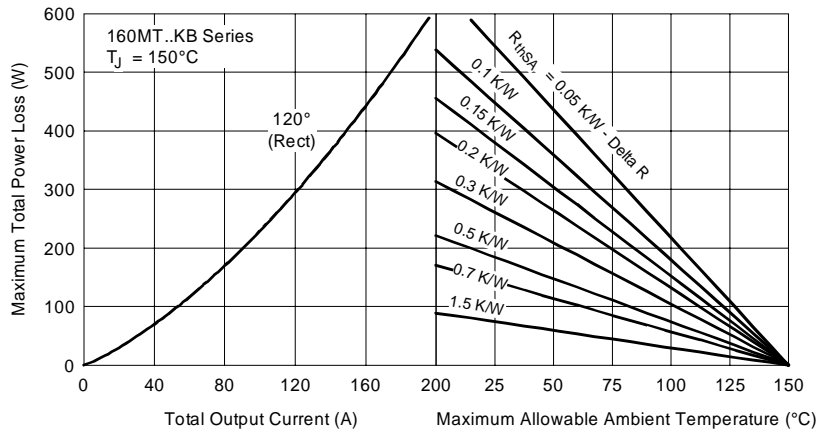


Fig. 8 - Total Power Loss Characteristics

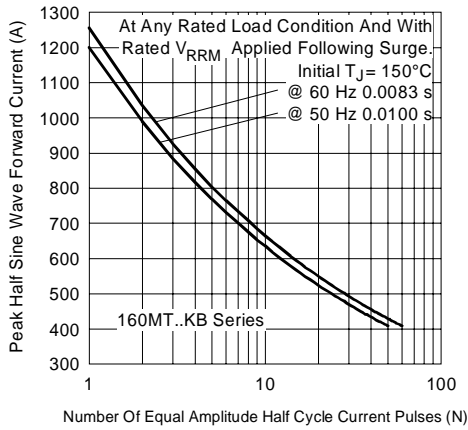


Fig. 9 - Maximum Non-Repetitive Surge Current

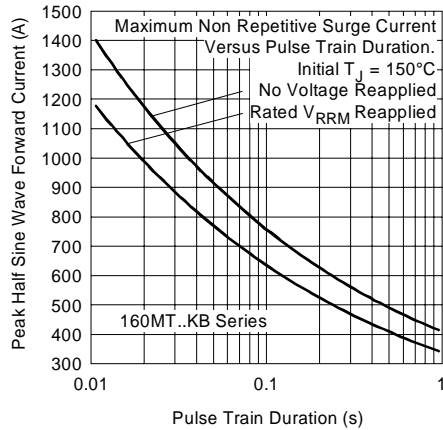


Fig. 10 - Maximum Non-Repetitive Surge Current

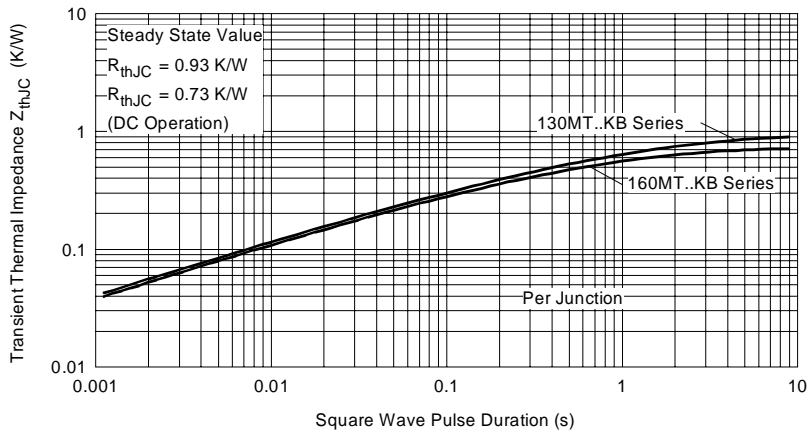


Fig. 11 - Thermal Impedance  $Z_{thJC}$  Characteristic

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 05/03