




Part Number 855735
70 MHz SAW Filter

Data Sheet

Features

- For broadband applications
- Typical 3 dB bandwidth of 0.31 MHz
- High attenuation
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Small size
- Replaces Sawtek P/N 851541 (BW 3dB=0.25 MHz)


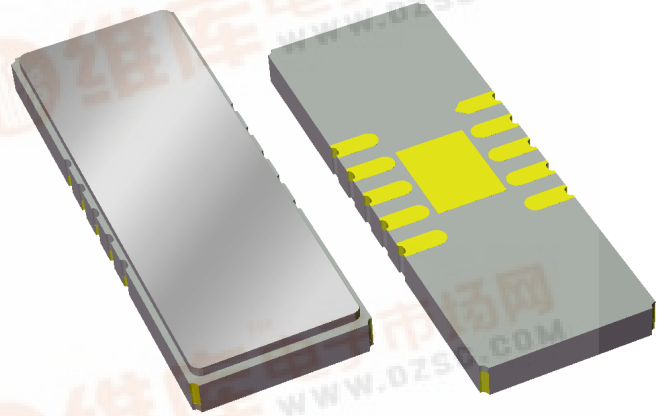


Package

Surface Mount 24.60 x 9.00 x 2.31 mm

Pin Configuration

Bottom View

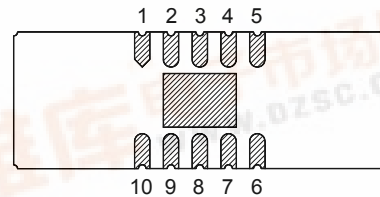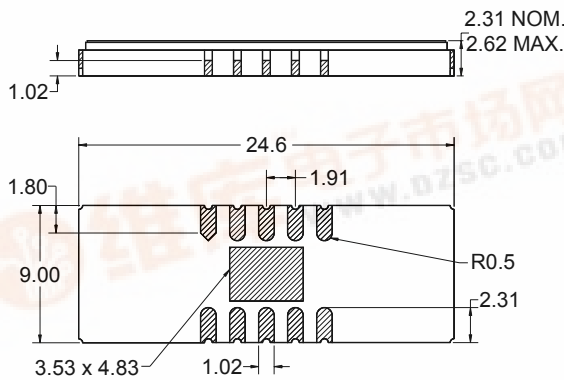

Pin No.	Description
1	Input return
5	Output
6	Output return
10	Input
2,3,4	Case ground
7,8,9	Case ground

Dimensions shown are nominal in millimeters
 All tolerances are ±0.15mm except overall
 length and width +0.13mm/-0.20mm

Body: Al₂O₃ ceramic

Lid: Kovar, Ni plated

Terminations: Au plating 0.5 - 1.0µm,
 over a 2 - 6µm Ni plating



Data Sheet

Electrical Specifications ⁽¹⁾

Operating Temperature Range: ⁽²⁾ 0 to +70 °C


Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Center Frequency	-	70	-	MHz
Minimum Insertion Loss	-	16.36	20	dB
Lower 1 dB Bandedge ⁽⁴⁾	-	69.90	69.935	MHz
Upper 1 dB Bandedge	70.065	70.09	-	MHz
Lower 3 dB Bandedge ⁽⁴⁾	-	69.84	69.87	MHz
Upper 3 dB Bandedge	70.13	70.16	-	MHz
Lower 40 dB Bandedge ⁽⁴⁾	69.5	69.56	-	MHz
Upper 40 dB Bandedge	-	70.46	70.5	MHz
Amplitude Variation 69.935 - 70.065 MHz	-	0.42	1	dB
Phase Linearity 69.935 - 70.065 MHz	-	0.84	3	deg
Group Delay Variation 69.935 - 70.065 MHz	-	249.70	470	nsec
Absolute Delay	-	3.19	-	μsec
Relative Attenuation ⁽⁴⁾				
10 - 68 MHz	50	69	-	dB
72 - 80 MHz	40	52	-	dB
80 - 135 MHz	50	64.5	-	dB
135 - 145 MHz	40	49.5	-	dB
145 - 200 MHz	50	63	-	dB
Source Impedance: ⁽⁵⁾	-	50	-	Ω
Load Impedance: ⁽⁵⁾	-	50	-	Ω

Notes:

1. All specifications are based on the test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. All attenuation measurements are measured relative to minimum insertion loss
5. This is the optimum impedance in order to achieve the performance shown





Test Circuit:

Actual matching values may vary due to PCB layout and parasitics

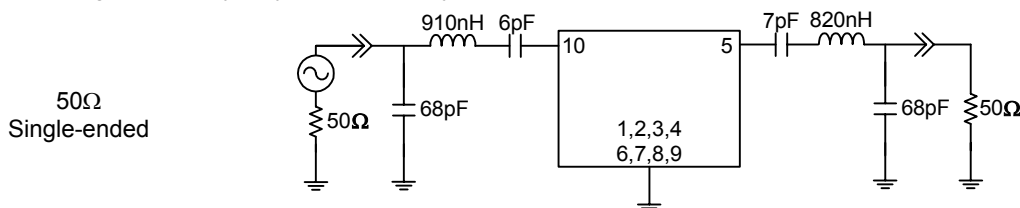


Data Sheet


Typical Performance (at +25°C)

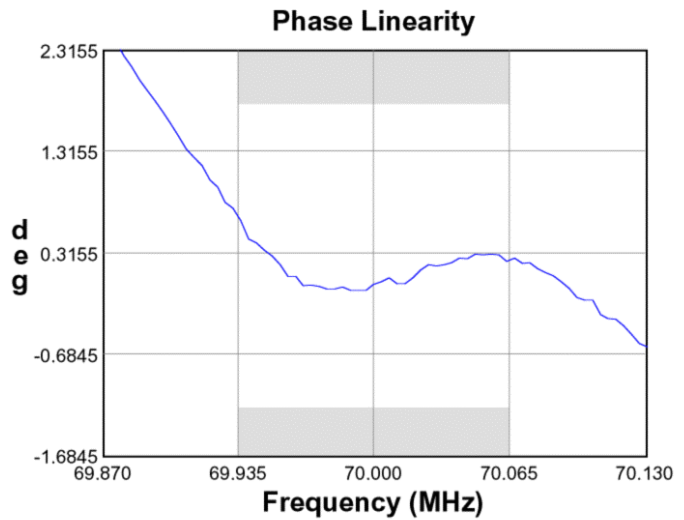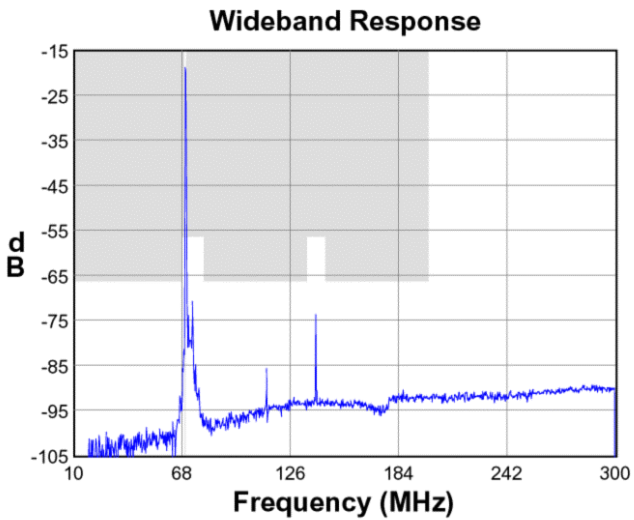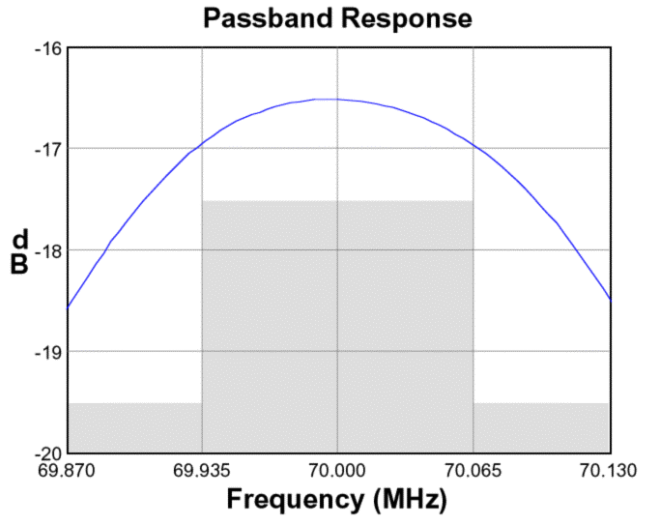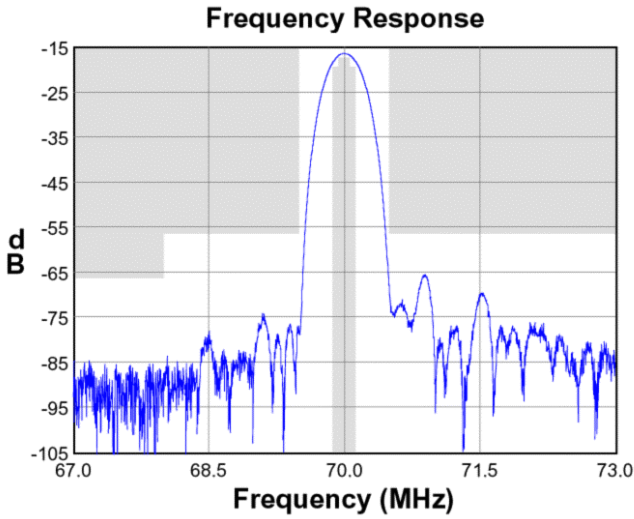

Input Smith Chart

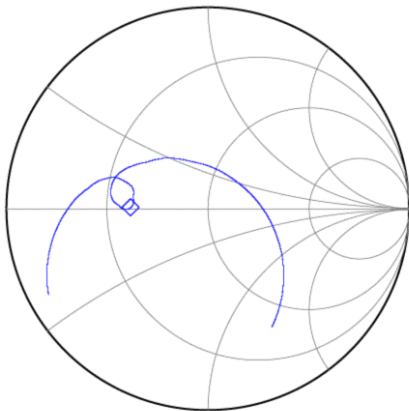


Output Smith Chart

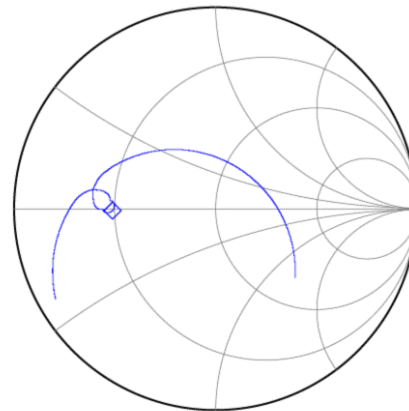

Data Sheet



Matching Schematics

Actual matching values may vary due to PCB layout and parasitics

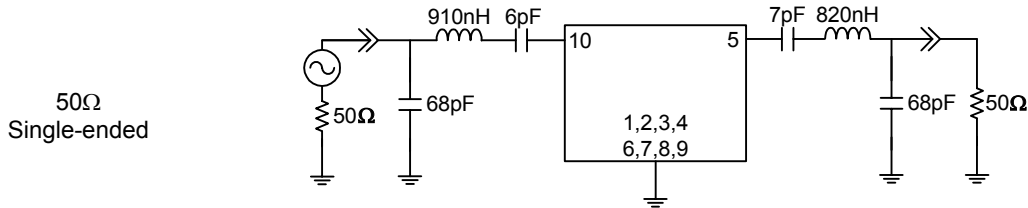

Marking



PCB Footprint

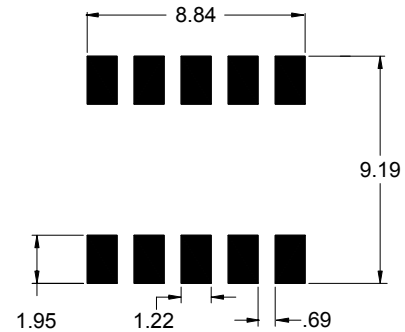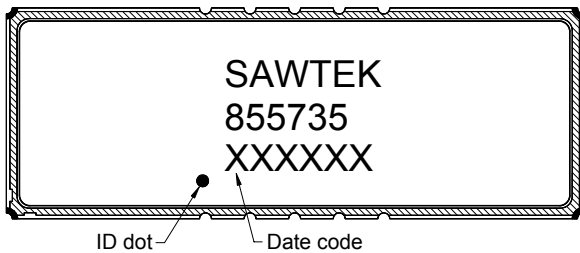

The date code consists of: day of the current year (Julian, 3 digits), last digit of the year (1 digit) and hour (2 digits)

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

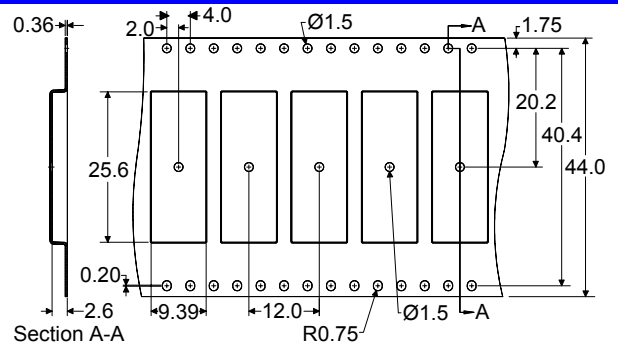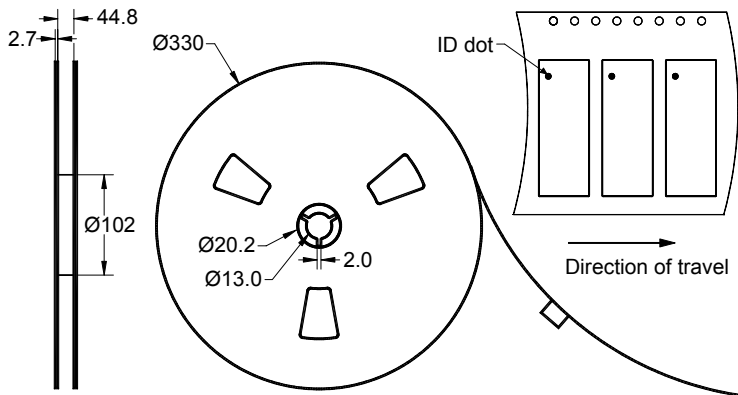

Dimensions shown are nominal in millimeters
Packaging quantity: 1000 units/reel

Data Sheet

Maximum Ratings

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature Range	T	0	+25	+70	°C
Storage Temperature Range	T _{stg}	-40	-	+85	°C

Warnings

- Electrostatic Sensitive Device (ESD)
- Avoid ultrasonic exposure



Links to Additional Technical Information

[PCB Layout Tips](#)

[Qualification Flowchart](#)

[Soldering Profile](#)

[S-Parameters](#)

[Other Technical Information](#)

Contact Information



PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: custservice@sawtek.com
Web: www.sawtek.com

Or contact one of our worldwide
network of [sales offices](#),
[representatives or distributors](#)