

INCHANGE Semiconductor

isc Product Specification

isc Silicon NPN Power Transistors

BUV26F/AF

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 90V(\text{Min})$ - BUV26F
100V(Min)- BUV26AF
- High Switching Speed

APPLICATIONS



- Designed for fast switching applications such as high frequency and efficiency converters, switching regulators and motor control.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT	
V_{CES}	Collector-Emitter Voltage $V_{BE} = 0$	BUV26F	180	V
		BUV26AF	200	
V_{CEO}	Collector-Emitter Voltage	BUV26F	90	V
		BUV26AF	100	
V_{EBO}	Emitter-Base Voltage	5	V	
I_C	Collector Current-Continuous	14	A	
I_{CM}	Collector Current-Peak	25	A	
I_B	Base Current-Continuous	4	A	
I_{BM}	Base Current-Peak	6	A	
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	18	W	
T_J	Junction Temperature	150	$^\circ\text{C}$	
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	7.0	$^\circ\text{C}/\text{W}$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	55	$^\circ\text{C}/\text{W}$

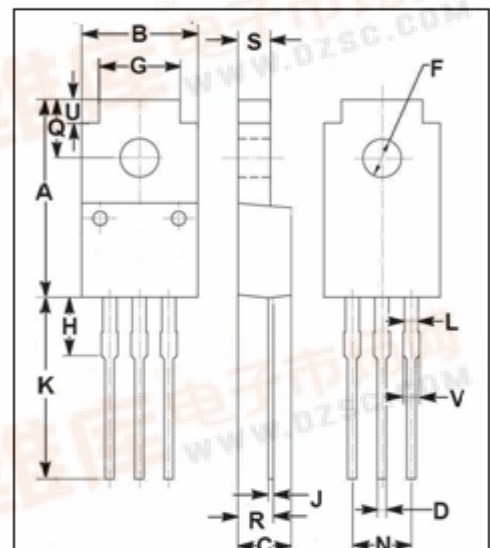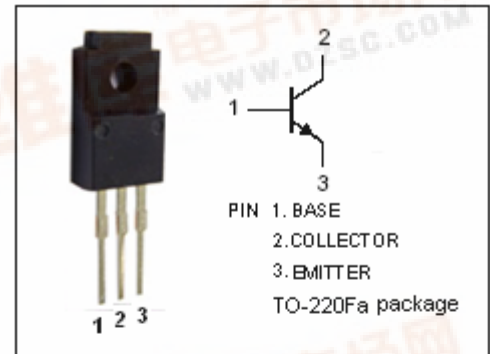

DIM	mm	
	MIN	MAX
A	16.85	17.15
B	9.90	10.10
C	4.35	4.65
D	0.75	0.80
F	3.20	3.40
G	6.90	7.10
H	5.15	5.45
J	0.45	0.75
K	13.35	13.65
L	1.10	1.30
N	4.98	5.18
Q	4.85	5.15
R	2.95	3.25
S	2.70	2.90
U	1.75	2.05
V	1.30	1.50



isc Silicon NPN Power Transistors

BUV26F/AF

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	BUV26F	$I_C=0.2\text{A}; I_B=0; L=25\text{mH}$			V
		BUV26AF				
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	BUV26F	$I_C=12\text{A}; I_B=1.2\text{A}$			V
		BUV26AF	$I_C=10\text{A}; I_B=1.0\text{A}$			
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	BUV26F	$I_C=6\text{A}; I_B=0.6\text{A}$			V
		BUV26AF	$I_C=5\text{A}; I_B=0.5\text{A}$			
$V_{BE(sat)-1}$	Base-Emitter Saturation Voltage	BUV26F	$I_C=12\text{A}; I_B=1.2\text{A}$			V
		BUV26AF	$I_C=10\text{A}; I_B=1.0\text{A}$			
$V_{BE(sat)-2}$	Base-Emitter Saturation Voltage	BUV26F	$I_C=6\text{A}; I_B=0.6\text{A}$			V
		BUV26AF	$I_C=5\text{A}; I_B=0.5\text{A}$			
I_{CEX}	Collector Cutoff Current	$V_{CE}=V_{CESmax}; V_{BE}=-1.5\text{V}; T_J=125^\circ\text{C}$			1.0	mA
I_{CES}	Collector Cutoff Current	$V_{CE}=V_{CESmax}; V_{BE}=0; T_J=125^\circ\text{C}$			3.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			1.0	mA

Switching Times; Resistive Load

t_{on}	Turn-On Time	For BUV26F $I_C=12\text{A}; I_{B1}=1.2\text{A}; I_{B2}=-2.4\text{A}$		0.4	0.6	μs
t_{stg}	Storage Time		For BUV26AF $I_C=10\text{A}; I_{B1}=1.0\text{A}; I_{B2}=-2.0\text{A}$		0.45	1.0
t_f	Fall Time			0.12	0.25	μs