



HS3X / UF3X SERIES

**SURFACE MOUNT
HIGH EFFICIENCY (ULTRA FAST)
GLASS PASSIVATED RECTIFIERS**


REVERSE VOLTAGE - 50 to 1000 Volts
FORWARD CURRENT - 3.0 Amperes

FEATURES

- Low cost
- Diffused junction
- Ultra fast switching for high efficiency
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0

MECHANICAL DATA

- Case: Molded Plastic
- Polarity:Color band denotes cathode
- Weight: 0.007 ounces,0.21 grams
- Mounting position: Any

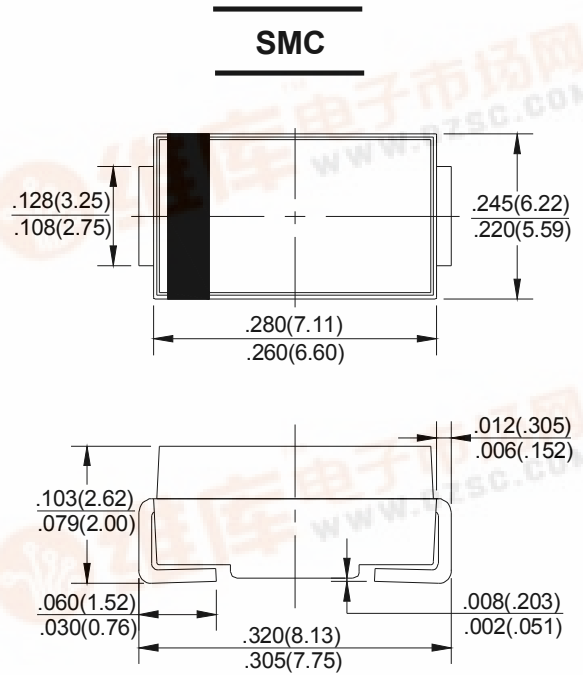


Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave ,60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	HS3A	HS3B	HS3D	HS3G	HS3J	HS3K	HS3M	UNIT
		UF3A	UF3B	UF3D	UF3G	UF3J	UF3K	UF3M	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @TA = 55 °C	I(AV)	3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	IFSM	150							A
Peak Forward Voltage at 3.0A DC	VF	1.0		1.3		1.7			V
Maximum DC Reverse Current at Rated DC Blocking Voltage @TJ=25°C @TJ=100°C	IR	5.0							μA
Maximum Reverse Recovery Time(Note 1)	TRR	50				75			nS
Typical Junction Capacitance (Note2)	CJ	50				30			pF
Typical Thermal Resistance (Note3)	RθJA	20							°C/W
Operating Temperature Range	TJ	-55 to +150							°C
Storage Temperature Range	TSTG	-55 to +150							°C

NOTES: 1. Measured with IF=0.5A, IR=1A, IRR=0.25A
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC
3. Thermal resistance junction to ambient



RATING AND CHARACTERISTIC CURVES

HS3X / UF3X SERIES



FIG. 1 – FORWARD CURRENT DERATING CURVE

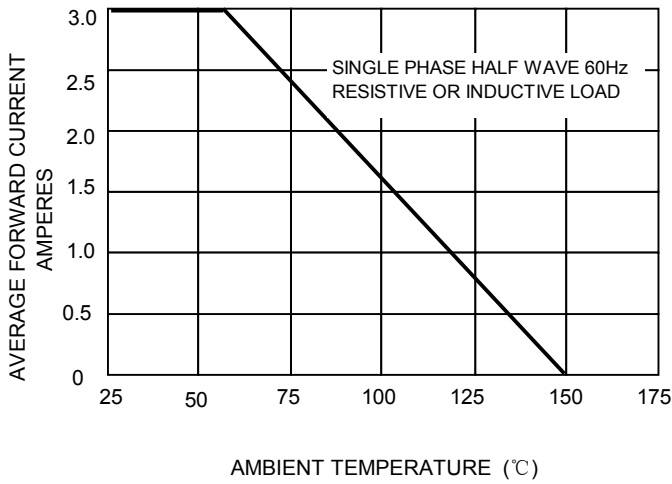


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

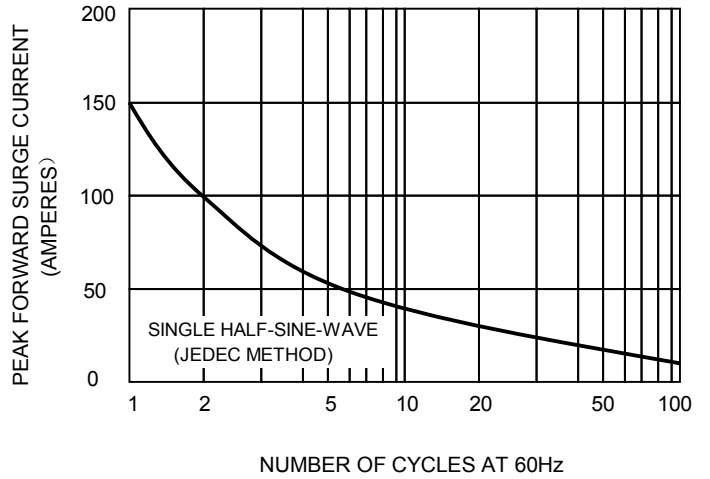


FIG. 3 – TYPICAL JUNCTION CAPACITANCE

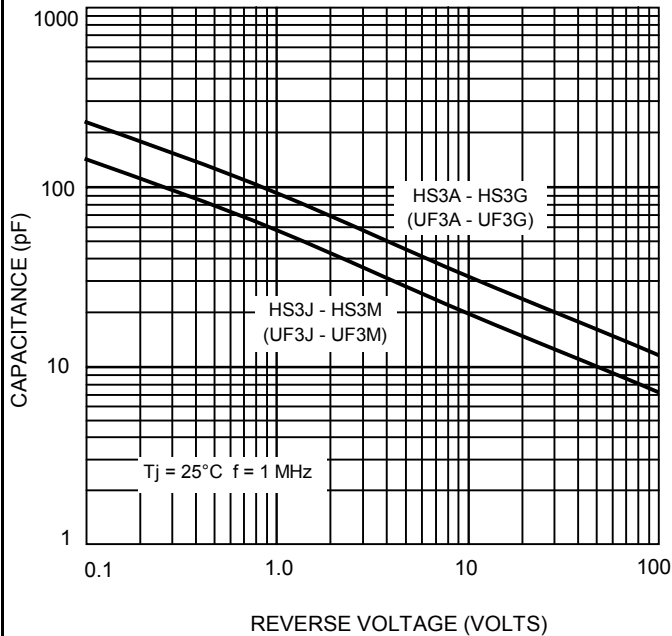


FIG. 4-TYPICAL FORWARD CHARACTERISTICS

