


SMD Power Inductor CDRH8D43



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 8.3 × 8.3 × 4.5 mm Max.
- Product weight: 0.93g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 13" diameter reel
- 500pcs per reel



Applications

- Ideally used in Mobile phone, MP3, PDA, HDD, DSC/DVC, etc as DC-DC converter inductors.


Dimension - [mm]

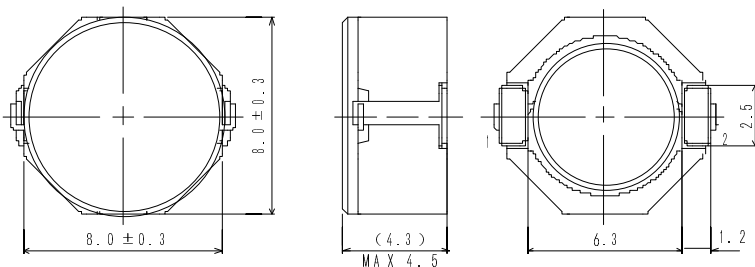

Land pattern and Schematics - [mm]



($0.68 \mu\text{H} \sim 15 \mu\text{H}$)



($22 \mu\text{H} \sim 100 \mu\text{H}$)

SMD Power Inductor CDRH8D43



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) Max. (Typ.) (at 20°C)	Saturation Current (A) ※2	Temperature Rise Current (A) ※3
CDRH8D43NP-R68NC	R68	0.68 \pm 35%	9.5(7.0)	9.0	6.9
CDRH8D43NP-1R2NC	1R2	1.2 \pm 35%	12.2(9.0)	8.0	6.2
CDRH8D43NP-2R0NC	2R0	2.0 \pm 30%	14(11)	7.0	5.5
CDRH8D43NP-3R9NC	3R9	3.9 \pm 30%	19(15)	5.9	4.5
CDRH8D43NP-4R7NC	4R7	4.7 \pm 30%	22(17)	5.6	4.1
CDRH8D43NP-6R8NC	6R8	6.8 \pm 30%	25(20)	4.4	3.9
CDRH8D43NP-100NC	100	10 \pm 30%	36(29)	4.0	3.2
CDRH8D43NP-150NC	150	15 \pm 30%	53(42)	2.9	2.3
CDRH8D43NP-220NC	220	22 \pm 30%	75(60)	2.6	1.8
CDRH8D43NP-330NC	330	33 \pm 30%	125(100)	2.2	1.4
CDRH8D43NP-470NC	470	47 \pm 30%	150(120)	1.8	1.3
CDRH8D43NP-680NC	680	68 \pm 30%	240(190)	1.5	1.0
CDRH8D43NP-101NC	101	100 \pm 30%	360(290)	1.3	0.8

※1. Inductance measuring conditions at 100kHz.

※2. Saturation current: The DC current at which the inductance decreases to 65% of its nominal value.


※3. Temperature rise current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$. ($T_a=20^{\circ}\text{C}$)

SMD Power Inductor CDRH8D43



Saturation Current & Temperature Rise Graph


— L (20°C) — L (100°C) — ΔT

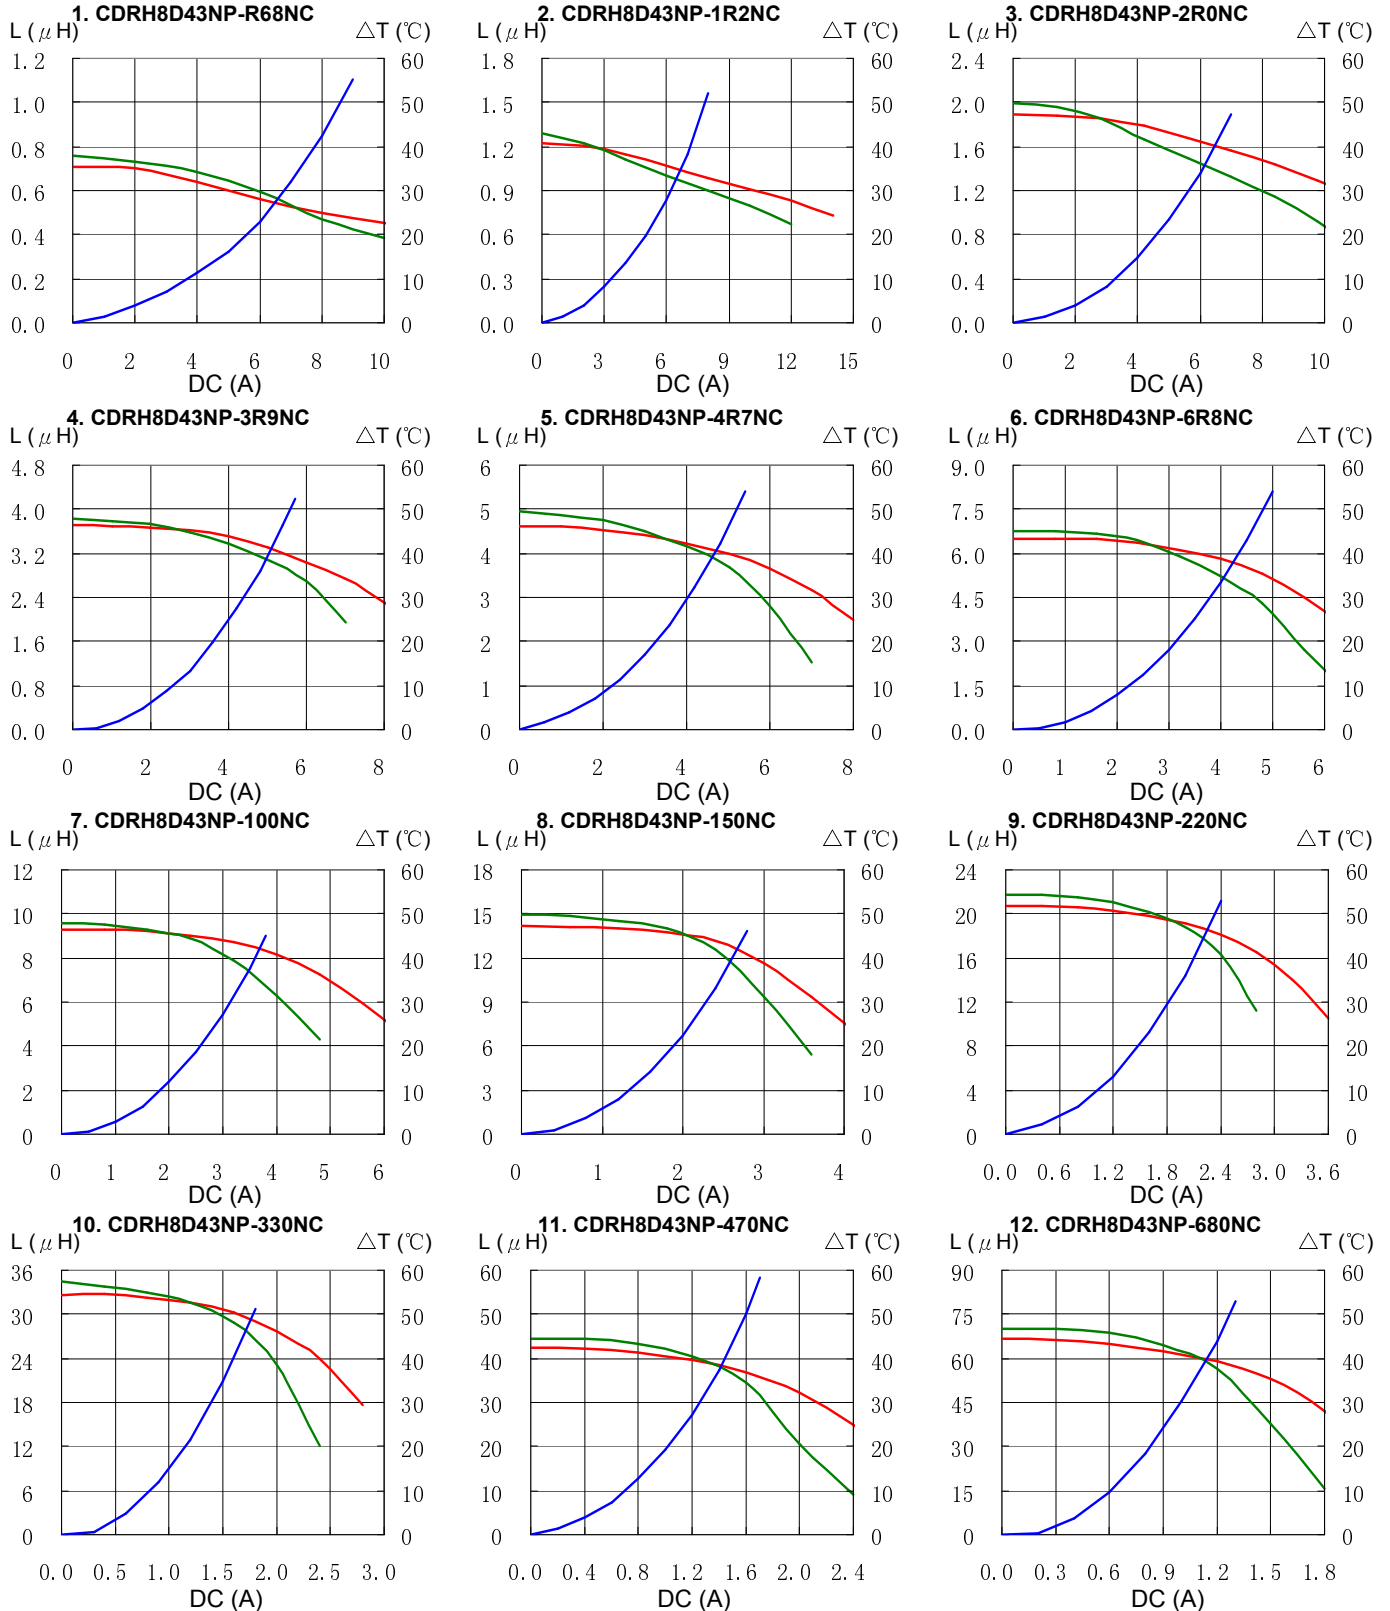



SMD Power Inductor CDRH8D43



Saturation Current & Temperature Rise Graph

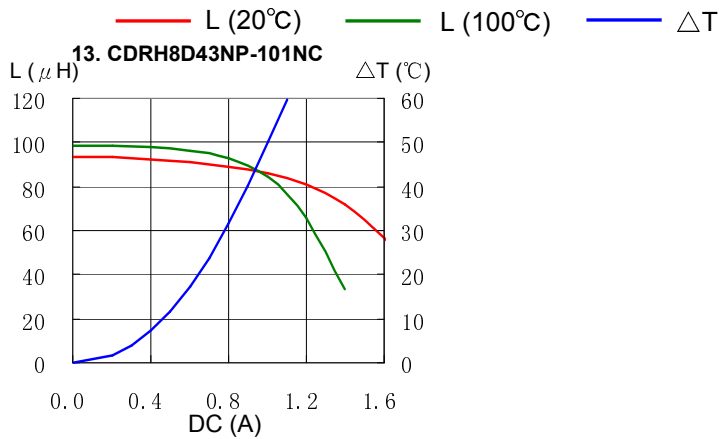

Solder Reflow Condition

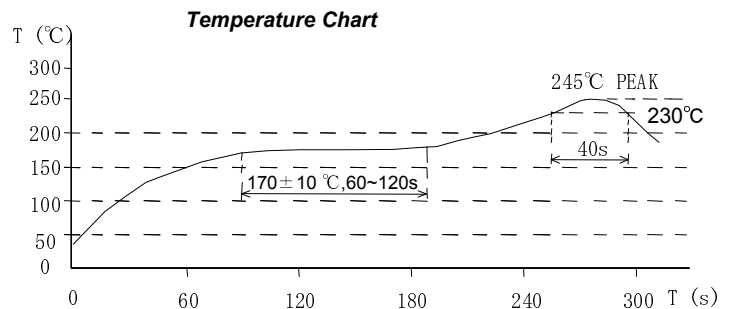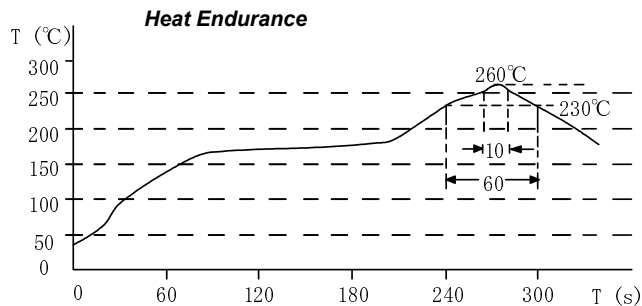

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com