


LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			P1	REV PER ECR 06-001832	24APR06	JR

AMP WIRE RANGE	FILE E13288	LR7189 Certified
6 AWG STRANDED	6 AWG STRANDED	6 AWG STRANDED

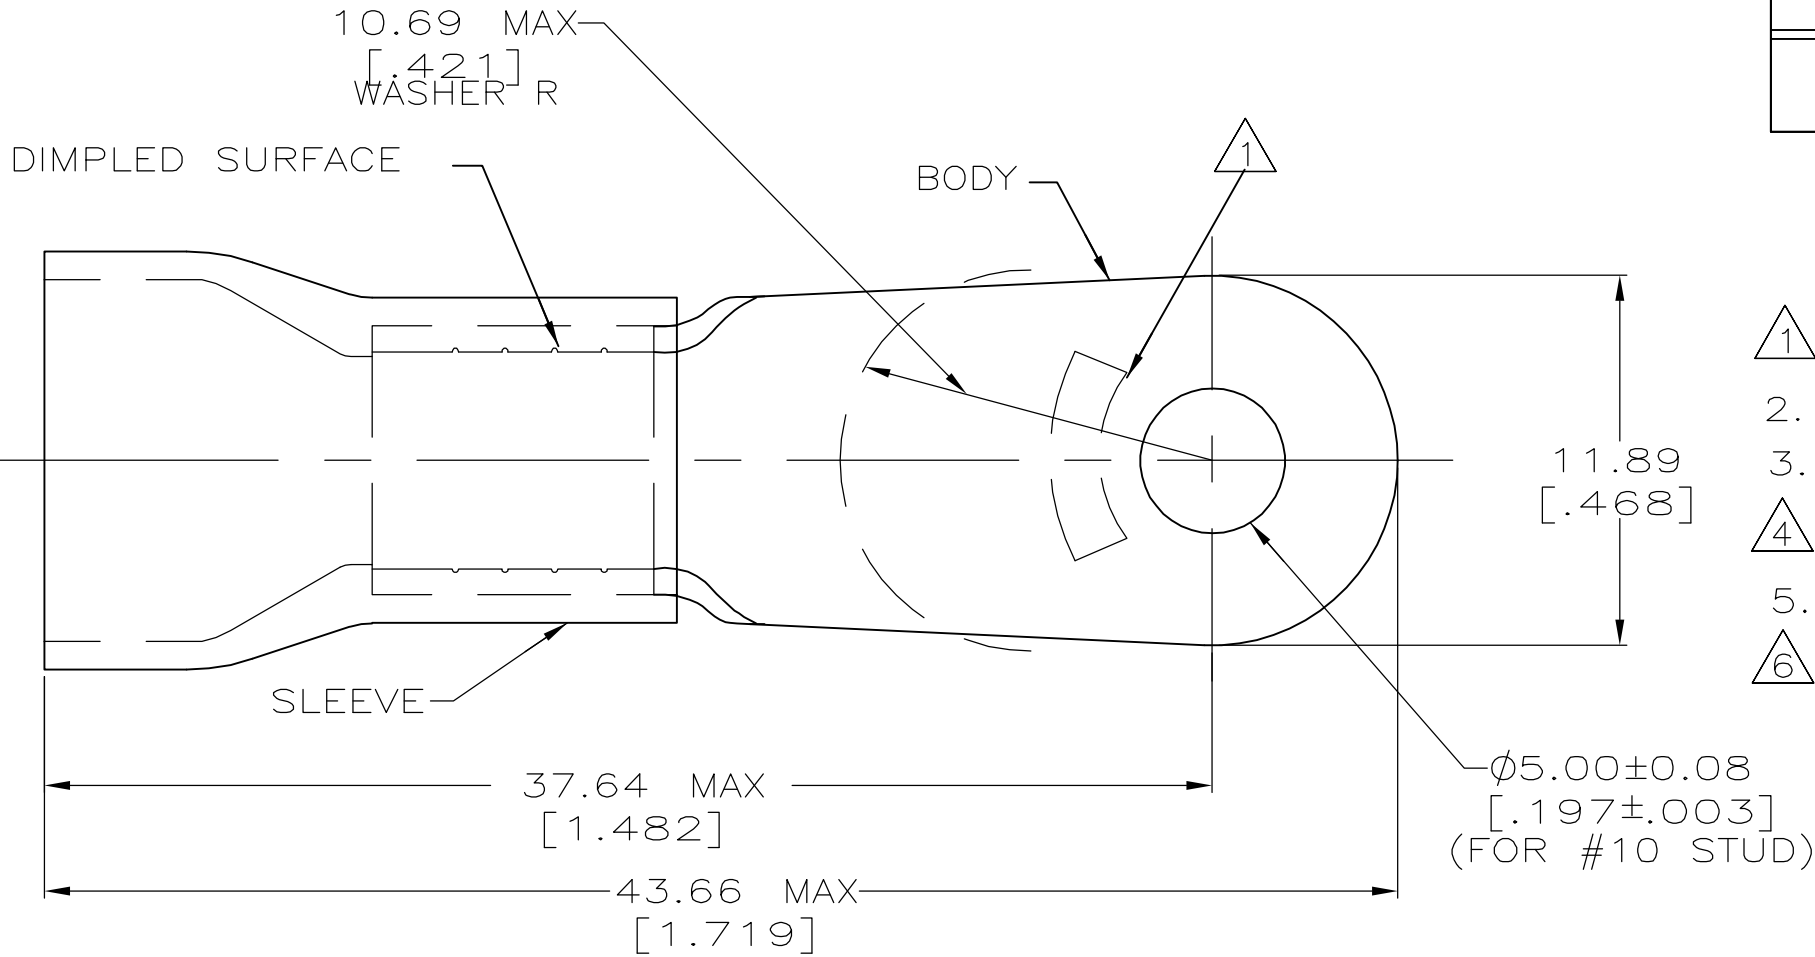

- 1 STAMP AMP 6* LOCATE APPROX AS SHOWN
2. TONGUE MATERIAL THK 1.14±0.08[.045±.003]
3. SEE TABLE FOR WIRE INSULATION DIA MAX
- 4 FOREIGN PRODUCTION ONLY
5. TAPE ITEMS ARE ON 30.48[1.200] CENTERS
- 6 SUPERSEDED BY 8-52265-5

11.07 [.436]	20	LOOSE PC,BOX SPL	8-52265-66
		LOOSE PC, BOX	8-52265-5
9.14 [.360]	500	ON TAPE	52265-4
11.07 [.436]			52265-3
9.14 [.360]	-	LOOSE PC	52265-14
11.07 [.436]			52265
WIRE INSULATION DIA	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
90° C

VOLTAGE RATING:
600 V MAX

CIRCULAR MIL AREA:
10.54-16.77mm² [20,800-33,100]
STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM [INCHES]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.20[.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL
COPPER PER ASTM B-152

FINISH
TIN PLATE PER ASTM B545

DWN
S.S. GOULDEN
9-29-93

CHK
R. HERSEY
9-29-93

APVD
M ELLIS
9-29-93

PRODUCT SPEC
NOT AVAILABLE

APPLICATION SPEC
NOT AVAILABLE

WEIGHT
-

tyco
Electronics

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME
TERMINAL, RING TONGUE,
PLASTI-GRIP
WIRE SIZE 6 AWG

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-52265

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
NTS

SHEET
1 OF 1

REV
P1

AMP 1470-19 REV 31MAR2000