

<p>62033 GaAs LIGHT EMITTING DIODE, TO-46 PACKAGE (TYPE GS5040)</p>	<p>Mii OPTOELECTRONIC PRODUCTS DIVISION</p>
--	--

<p>Features:</p> <ul style="list-style-type: none"> • Hermetically sealed • High output, 940nm • Small package • Spectrally matched to the 61058 series detector 	<p>Applications:</p> <ul style="list-style-type: none"> • Touch screen arrays • Reflective sensors • Position sensors • Level sensors
---	--

DESCRIPTION

The **62033** is a P-N GaAs Infrared Light Emitting Diode in a TO-46 package and is spectrally matched to silicon phototransistors and photodarlington. Available binned to customer specifications and/or screened to MIL-PRF-19500.

ABSOLUTE MAXIMUM RATINGS 25°C FREE AIR TEMPERATURE UNLESS NOTED



Storage Temperature.....	-40°C to +100°C
Operating Temperature	-40°C to +80°C
Reverse Voltage (at 25°C case temperature)	(See note 1)..... 2Vdc
Forward Current-Continuous	200mA
Soldering Temperature (1/16 inch from case for 10 seconds).....	240°C

NOTES:

1. Derate linearly to 80°C case temperature at the rate of 3.6mA/°C.

Package Dimensions

Schematic Diagram

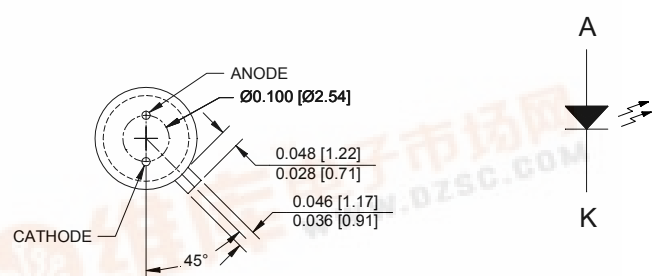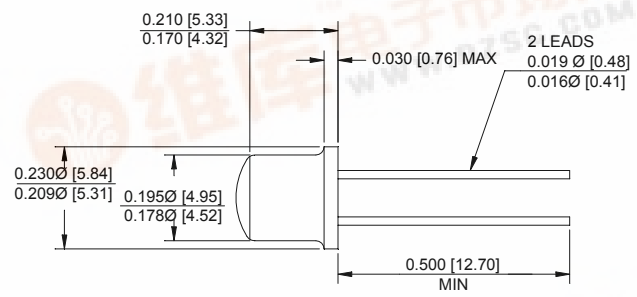

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

THE ANODE IS IN ELECTRICAL CONTACT WITH THE CASE



ELECTRICAL CHARACTERISTICS


T_A = 25°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Output Power	62033-X01 62033-X02 62033-X03	2.0 3.5 4.8	2.5 4.2 6.0		mW	I _F = 100mA	
Forward Voltage	62033-XXX			1.7	V	I _F = 100mA	
Reverse Breakdown Voltage	62033-XXX	2			V	I _R = 10μA	
Radiation Rise Time	62033-XXX		0.7		μs		
Peak Wavelength	62033-XXX		940		nm	I _F = 100mA	
Beam Angle	62033-XXX		20		degrees		1
Forward Max Continuous Current	62033-XXX			200	mA	25°C Case	


NOTES:

- Angle between half-intensity points.


INSTANTANEOUS POWER OUTPUT versus FORWARD CURRENT

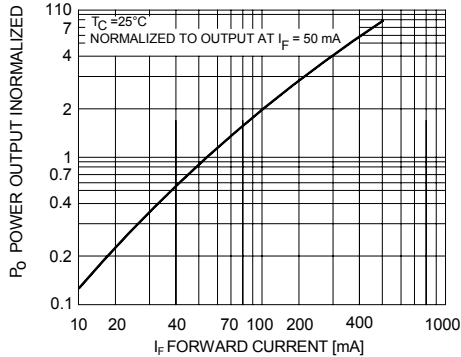


RADIATION PATTERN

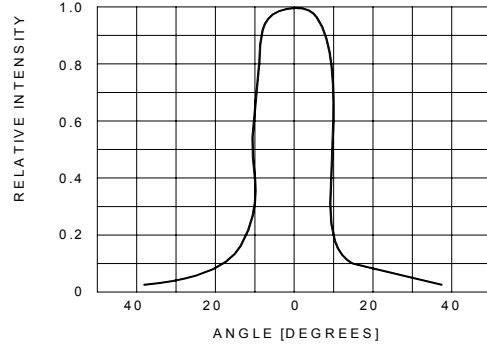

POWER OUTPUT versus JUNCTION TEMPERATURE

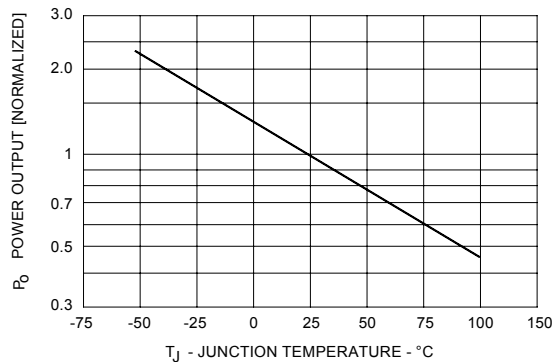

RELATIVE SPECTRAL OUTPUT

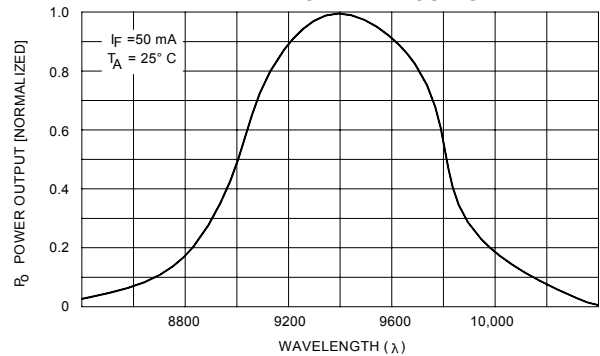

RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Forward Current	I _F	50	200	mA

SELECTION GUIDE

PART NUMBER	PART DESCRIPTION	P _O Range
62033-001	GS5040-1, GaAs LED in TO-46 package, commercial version	+2.0 mW
62033-101	GaAsLED in TO-46 package (-55° to +100°C) with 100% screening	+2.0 mW
62033-002	GS5040-2, GaAs LED in TO-46 package, commercial version	+3.5 mW
62033-102	GaAsLED in TO-46 package (-55° to +100°C) with 100% screening	+3.5 mW
62033-003	GS5040-3, GaAs LED in TO-46 package, commercial version	+4.8 mW
62033-103	GaAsLED in TO-46 package (-55° to +100°C) with 100% screening	+4.8 mW