



May 1991  
Revised November 1998

## 74ACTQ16240

### 16-Bit Inverting Buffer/Line Driver with 3-STATE Outputs

#### General Description

The ACTQ16240 contains sixteen inverting buffers with 3-STATE outputs designed to be employed as a memory and address driver, clock driver, or bus-oriented transmitter/receiver. The device is nibble controlled. Each nibble has separate 3-STATE control inputs which can be shorted together for full 16-bit operation.

The ACTQ16240 utilizes Fairchild's Quiet Series™ technology to guarantee quiet output switching and improve dynamic threshold performance. FACT Quiet Series™ features GTO™ output control for superior performance.

#### Features


- Utilizes Fairchild's FACT Quiet Series technology
- Guaranteed simultaneous switching noise level and dynamic threshold performance
- Guaranteed pin-to-pin output skew
- Separate control logic for each byte
- 16-bit version of the ACTQ240
- Outputs source/sink 24 mA
- Additional specs for multiple output switching
- Output loading specs for both 50 pF and 250 pF loads

#### Ordering Code:

Order Number	Package Number	Package Description
74ACTQ16240SSC	MS48A	48-Lead Small Shrink Outline Package (SSOP), JEDEC MO-118, 0.300" Wide
74ACTQ16240MTD	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

#### Logic Symbol

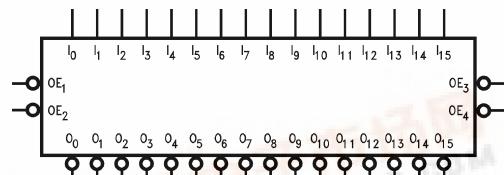

#### Pin Descriptions

Pin Names	Description
OE <sub>n</sub>	Output Enable Inputs (Active Low)
I <sub>0</sub> -I <sub>15</sub>	Inputs
O <sub>0</sub> -O <sub>15</sub>	Outputs

#### Connection Diagram

Pin Assignment for SSOP and TSSOP	
OE <sub>1</sub>	1
OE <sub>2</sub>	2
OE <sub>3</sub>	3
OE <sub>4</sub>	4
GND	4
I <sub>0</sub>	5
I <sub>1</sub>	6
I <sub>2</sub>	7
I <sub>3</sub>	8
I <sub>4</sub>	9
I <sub>5</sub>	10
I <sub>6</sub>	11
I <sub>7</sub>	12
I <sub>8</sub>	13
I <sub>9</sub>	14
GND	15
I <sub>10</sub>	16
I <sub>11</sub>	17
I <sub>12</sub>	18
I <sub>13</sub>	19
I <sub>14</sub>	20
GND	21
I <sub>15</sub>	22
OE <sub>4</sub>	23
OE <sub>3</sub>	24
OE <sub>2</sub>	48
I <sub>0</sub>	47
I <sub>1</sub>	46
GND	45
I <sub>2</sub>	44
I <sub>3</sub>	43
V <sub>CC</sub>	42
I <sub>4</sub>	41
I <sub>5</sub>	40
GND	39
I <sub>6</sub>	38
I <sub>7</sub>	37
I <sub>8</sub>	36
I <sub>9</sub>	35
GND	34
I <sub>10</sub>	33
I <sub>11</sub>	32
V <sub>CC</sub>	31
I <sub>12</sub>	30
I <sub>13</sub>	29
GND	28
I <sub>14</sub>	27
I <sub>15</sub>	26
OE <sub>3</sub>	25

FACT™, FACT Quiet Series™, Quiet Series™, and GTO™ are trademarks of Fairchild Semiconductor Corporation.

74ACTQ16240 16-Bit Inverting Buffer/Line Driver with 3-STATE Outputs

**Truth Tables**

Inputs		Outputs
$\overline{OE}_1$	$I_0-I_3$	$\overline{O}_0-\overline{O}_3$
L	L	H
L	H	L
H	X	Z
Inputs		Outputs
$\overline{OE}_2$	$I_4-I_7$	$\overline{O}_4-\overline{O}_7$
L	L	H
L	H	L
H	X	Z
Inputs		Outputs
$\overline{OE}_3$	$I_8-I_{11}$	$\overline{O}_8-\overline{O}_{11}$
L	L	H
L	H	L
H	X	Z
Inputs		Outputs
$\overline{OE}_4$	$I_{12}-I_{15}$	$\overline{O}_{12}-\overline{O}_{15}$
L	L	H
L	H	L
H	X	Z

H = High Voltage Level


L = Low Voltage Level

X = Immaterial

Z = High Impedance

**Functional Description**

The ACTQ16240 contains sixteen inverting buffers with 3-STATE standard outputs. The device is nibble (4 bits) controlled with each nibble functioning identically, but independently of the other. The control pins may be shorted together to obtain full 16-bit operation. The 3-STATE outputs are controlled by an Output Enable ( $\overline{OE}_n$ ) input for each nibble. When  $\overline{OE}_n$  is LOW, the outputs are in 2-state mode. When  $\overline{OE}_n$  is HIGH, the outputs are in the high impedance mode, but this does not interfere with entering new data into the inputs.

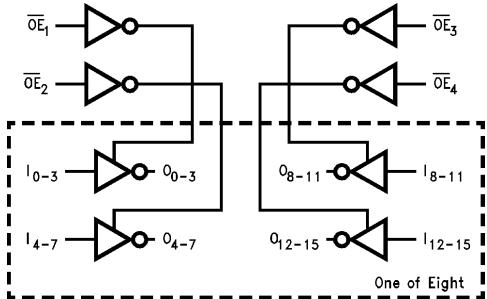**Logic Diagram**

Absolute Maximum Ratings (Note 1)			Recommended Operating Conditions			
Supply Voltage ( $V_{CC}$ )	-0.5V to +7.0V		Supply Voltage ( $V_{CC}$ )	4.5V to 5.5V		
DC Input Diode Current ( $I_{IK}$ )			Input Voltage ( $V_I$ )	0V to $V_{CC}$		
$V_I = -0.5V$	-20 mA		Output Voltage ( $V_O$ )	0V to $V_{CC}$		
$V_I = V_{CC} + 0.5V$	+20 mA		Operating Temperature ( $T_A$ )	-40°C to +85°C		
DC Output Diode Current ( $I_{OK}$ )			Minimum Input Edge Rate ( $\Delta V/\Delta t$ )	125 mV/ns		
$V_O = -0.5V$	-20 mA		$V_{IN}$ from 0.8V to 2.0V			
$V_O = V_{CC} + 0.5V$	+20 mA		$V_{CC}$ @ 4.5V, 5.5V			
DC Output Voltage ( $V_O$ )	-0.5V to $V_{CC} + 0.5V$					
DC Output Source/Sink Current ( $I_O$ )	$\pm 50$ mA					
DC $V_{CC}$ or Ground Current per Output Pin		$\pm 50$ mA				
Junction Temperature		+140°C				
Storage Temperature	-65°C to +150°C					
<b>DC Electrical Characteristics</b>						
Symbol	Parameter	$V_{CC}$ (V)	$T_A = +25^\circ C$		Units	Conditions
			Typ	Guaranteed Limits		
$V_{IH}$	Minimum High Input Voltage	4.5 5.5	1.5 1.5	2.0 2.0	V	$V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$
$V_{IL}$	Maximum Low Input Voltage	4.5 5.5	1.5 1.5	0.8 0.8	V	$V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$
$V_{OH}$	Minimum High Output Voltage	4.5 5.5	4.49 5.49	4.4 5.4	V	$I_{OUT} = -50 \mu A$
		4.5 5.5		3.86 4.86	V	$V_{IN} = V_{IL}$ or $V_{IH}$ $I_{OH} = -24 mA$ $I_{OH} = -24 mA$ (Note 2)
$V_{OL}$	Maximum Low Output Voltage	4.5 5.5	0.001 0.001	0.1 0.1	V	$I_{OUT} = 50 \mu A$
		4.5 5.5		0.36 0.36	V	$V_{IN} = V_{IL}$ or $V_{IH}$ $I_{OL} = 24 mA$ $I_{OL} = 24 mA$ (Note 2)
$I_{OZ}$	Maximum 3-STATE Leakage Current	5.5		$\pm 0.5$	$\mu A$	$V_I = V_{IL}, V_{IH}$ $V_O = V_{CC}, GND$
$I_{IN}$	Maximum Input Leakage Current	5.5		$\pm 0.1$	$\mu A$	$V_I = V_{CC}, GND$
$I_{CCT}$	Maximum $I_{CC}$ /Input	5.5	0.6		$mA$	$V_I = V_{CC} - 2.1V$
$I_{CC}$	Max Quiescent Supply Current	5.5		8.0	$\mu A$	$V_{IN} = V_{CC}$ or GND
$I_{OLD}$	Minimum Dynamic Output Current (Note 3)	5.5			$mA$	$V_{OLD} = 1.65V$ Max
$I_{OHD}$				-75	$mA$	$V_{OHD} = 3.85V$ Min
$V_{OLP}$	Quiet Output Maximum Dynamic $V_{OL}$	5.0	0.5	0.8	V	Figure 1Figure 2 (Note 5)(Note 6)
$V_{OLV}$	Quiet Output Minimum Dynamic $V_{OL}$	5.0	-0.5	-1.0	V	Figure 1Figure 2 (Note 5)(Note 6)
$V_{OHP}$	Maximum Overshoot	5.0	$V_{OH} + 1.0$	$V_{OH} + 1.5$	V	Figure 1Figure 2 (Note 4)(Note 6)
$V_{OHV}$	Minimum $V_{CC}$ Droop	5.0	$V_{OH} - 1.0$	$V_{OH} - 1.8$	V	Figure 1Figure 2 (Note 4)(Note 6)
$V_{IHD}$	Minimum High Dynamic Input Voltage Level	5.0	1.7	2.0	V	(Note 4)(Note 7)
$V_{ILD}$	Maximum Low Dynamic Input Voltage Level	5.0	1.2	0.8	V	(Note 4)(Note 7)
<b>Note 2:</b> All outputs loaded; thresholds associated with output under test.						
<b>Note 3:</b> Maximum test duration 2.0 ms; one output loaded at a time.						
<b>Note 4:</b> Worst case package.						
<b>Note 5:</b> Maximum number of outputs that can switch simultaneously is $n$ . ( $n - 1$ ) outputs are switched LOW and one output held LOW.						
<b>Note 6:</b> Maximum number of outputs that can switch simultaneously is $n$ . ( $n - 1$ ) outputs are switched HIGH and one output held HIGH.						
<b>Note 7:</b> Maximum number of data inputs ( $n$ ) switching. ( $n - 1$ ) input switching 0V to 3V. Input under test switching 3V to threshold ( $V_{ILD}$ ).						

## AC Electrical Characteristics

Symbol	Parameter	V <sub>CC</sub> (V) (Note 8)	T <sub>A</sub> = +25°C C <sub>L</sub> = 50 pF			T <sub>A</sub> = -40°C to +85°C C <sub>L</sub> = 50 pF			Units
			Min	Typ	Max	Min	Max		
t <sub>PLH</sub>	Propagation Delay Data to Output	5.0	2.7	4.8	7.3	2.7	7.8	ns	
t <sub>PHL</sub>			3.0	5.1	7.3	3.0	7.8		
t <sub>PZH</sub>	Output Enable Time	5.0	2.5	4.5	7.4	2.5	7.9	ns	
t <sub>PZL</sub>			2.7	4.7	7.5	2.7	8.0		
t <sub>PHZ</sub>	Output Disable Time	5.0	2.3	5.0	7.9	2.3	8.2	ns	
t <sub>PLZ</sub>			2.0	4.6	7.4	2.0	7.9		

Note 8: Voltage Range 5.0 is 5.0V  $\pm$ 0.5V.

## Extended AC Electrical Characteristics

Symbol	Parameter	T <sub>A</sub> = -40°C to +85°C V <sub>CC</sub> = Com C <sub>L</sub> = 50 pF 16 Outputs Switching (Note 10)			T <sub>A</sub> = -40°C to +85°C V <sub>CC</sub> = Com C <sub>L</sub> = 250 pF (Note 11)			Units
		Min	Typ	Max	Min	Max		
t <sub>PLH</sub>	Propagation Delay	4.0		11.2	5.6	13.8	ns	
t <sub>PHL</sub>	Data to Output	4.0		10.0	5.6	13.6		
t <sub>PZH</sub>	Output Enable Time	3.5		10.1	(Note 12)		ns	
t <sub>PZL</sub>		3.4		10.0				
t <sub>PHZ</sub>	Output Disable Time	3.6		8.9	(Note 13)		ns	
t <sub>PLZ</sub>		3.1		8.1				
t <sub>OSHL</sub> (Note 9)	Pin to Pin Skew HL Data to Output			1.2			ns	
t <sub>OSLH</sub> (Note 9)	Pin to Pin Skew LH Data to Output			2.5			ns	
t <sub>OST</sub> (Note 9)	Pin to Pin Skew LH/HL Data to Output			4.3			ns	

Note 9: Skew is defined as the absolute value of the difference between the actual propagation delays for any two separate outputs of the same device. The specification applies to any outputs switching HIGH to LOW (t<sub>OSHL</sub>), LOW to HIGH (t<sub>OSLH</sub>), or any combination switching LOW to HIGH and/or HIGH to LOW (t<sub>OST</sub>).

Note 10: This specification is guaranteed but not tested. The limits apply to propagation delays for all paths described switching in phase (i.e., all low-to-high, high-to-low, etc.).

Note 11: This specification is guaranteed but not tested. The limits represent propagation delays with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load. This specification pertains to single output switching only.

Note 12: 3-STATE delays are load dominated and have been excluded from the datasheet.

Note 13: The Output Disable Time is dominated by the RC network (5000 $\Omega$ , 250 pF) on the output and has been excluded from the datasheet.

## Capacitance

Symbol	Parameter	Typ	Units	Conditions
C <sub>IN</sub>	Input Pin Capacitance	4.5	pF	V <sub>CC</sub> = 5.0V
C <sub>PD</sub>	Power Dissipation Capacitance	30	pF	V <sub>CC</sub> = 5.0V

## FACT Noise Characteristics

The setup of a noise characteristics measurement is critical to the accuracy and repeatability of the tests. The following is a brief description of the setup used to measure the noise characteristics of FACT.

### Equipment:

Hewlett Packard Model 8180A Word Generator  
PC-163A Test Fixture  
Tektronics Model 7854 Oscilloscope

### Procedure:

1. Verify Test Fixture Loading: Standard Load 50 pF, 500Ω.
2. Deskew the HFS generator so that no two channels have greater than 150 ps skew between them. This requires that the oscilloscope be deskewed first. It is important to deskew the HFS generator channels before testing. This will ensure that the outputs switch simultaneously.
3. Terminate all inputs and outputs to ensure proper loading of the outputs and that the input levels are at the correct voltage.
4. Set the HFS generator to toggle all but one output at a frequency of 1 MHz. Greater frequencies will increase DUT heating and affect the results of the measurement.

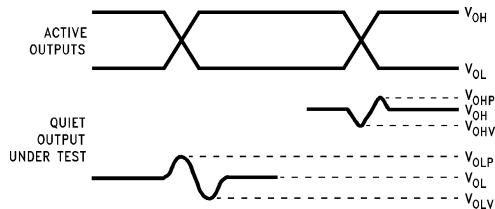


FIGURE 1. Quiet Output Noise Voltage Waveforms

**Note 14:**  $V_{OHV}$  and  $V_{OLP}$  are measured with respect to ground reference.

**Note 15:** Input pulses have the following characteristics:  $f = 1$  MHz,  $t_r = 3$  ns,  $t_f = 3$  ns, skew < 150 ps.

5. Set the HFS generator input levels at 0V LOW and 3V HIGH for ACT devices and 0V LOW and 5V HIGH for AC devices. Verify levels with an oscilloscope.

$V_{OLP}/V_{OLV}$  and  $V_{OHP}/V_{OHV}$ :

- Determine the quiet output pin that demonstrates the greatest noise levels. The worst case pin will usually be the furthest from the ground pin. Monitor the output voltages using a 50Ω coaxial cable plugged into a standard SMB type connector on the test fixture. Do not use an active FET probe.
- Measure  $V_{OLP}$  and  $V_{OLV}$  on the quiet output during the worst case transition for active and enable. Measure  $V_{OHP}$  and  $V_{OHV}$  on the quiet output during the worst case active and enable transition.
- Verify that the GND reference recorded on the oscilloscope has not drifted to ensure the accuracy and repeatability of the measurements.

$V_{ILD}$  and  $V_{IHD}$ :

- Monitor one of the switching outputs using a 50Ω coaxial cable plugged into a standard SMB type connector on the test fixture. Do not use an active FET probe.
- First increase the input LOW voltage level,  $V_{IL}$ , until the output begins to oscillate or steps out a min of 2 ns. Oscillation is defined as noise on the output LOW level that exceeds  $V_{IL}$  limits, or on output HIGH levels that exceed  $V_{IH}$  limits. The input LOW voltage level at which oscillation occurs is defined as  $V_{ILD}$ .
- Next decrease the input HIGH voltage level on the,  $V_{IH}$ , until the output begins to oscillate or steps out a min of 2 ns. Oscillation is defined as noise on the output LOW level that exceeds  $V_{IL}$  limits, or on output HIGH levels that exceed  $V_{IH}$  limits. The input HIGH voltage level at which oscillation occurs is defined as  $V_{IHD}$ .
- Verify that the GND reference recorded on the oscilloscope has not drifted to ensure the accuracy and repeatability of the measurements.


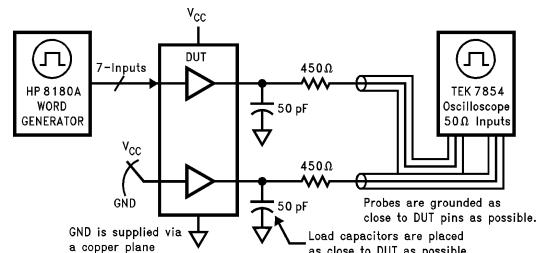



FIGURE 2. Simultaneous Switching Test Circuit

74ACTQ16240

**Physical Dimensions** inches (millimeters) unless otherwise noted

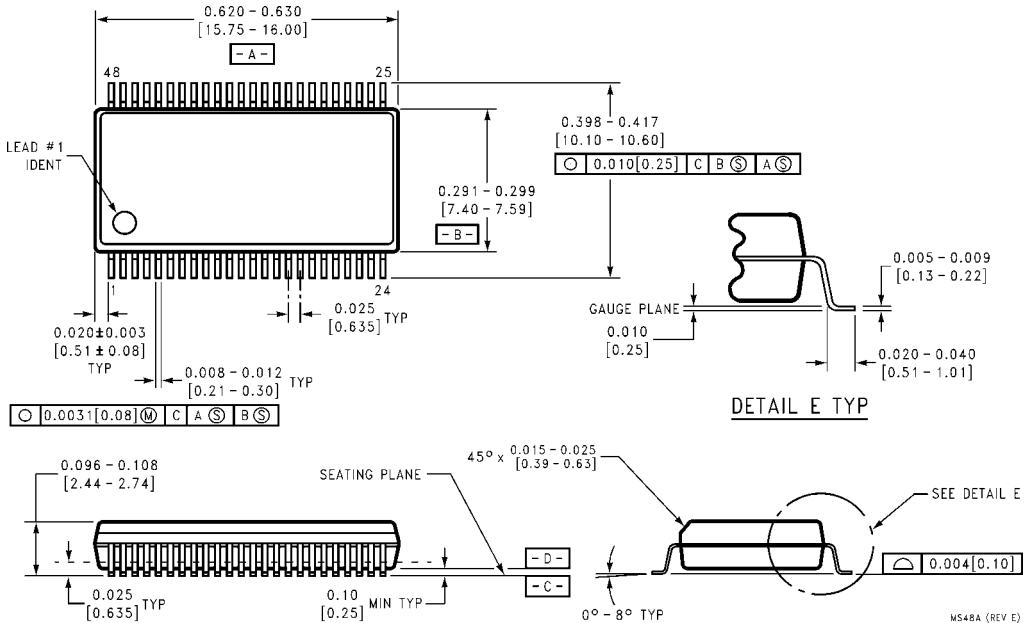

48-Lead Small Shrink Outline Package (SSOP), JEDEC MO-118, 0.300" Wide  
Package Number MS48A

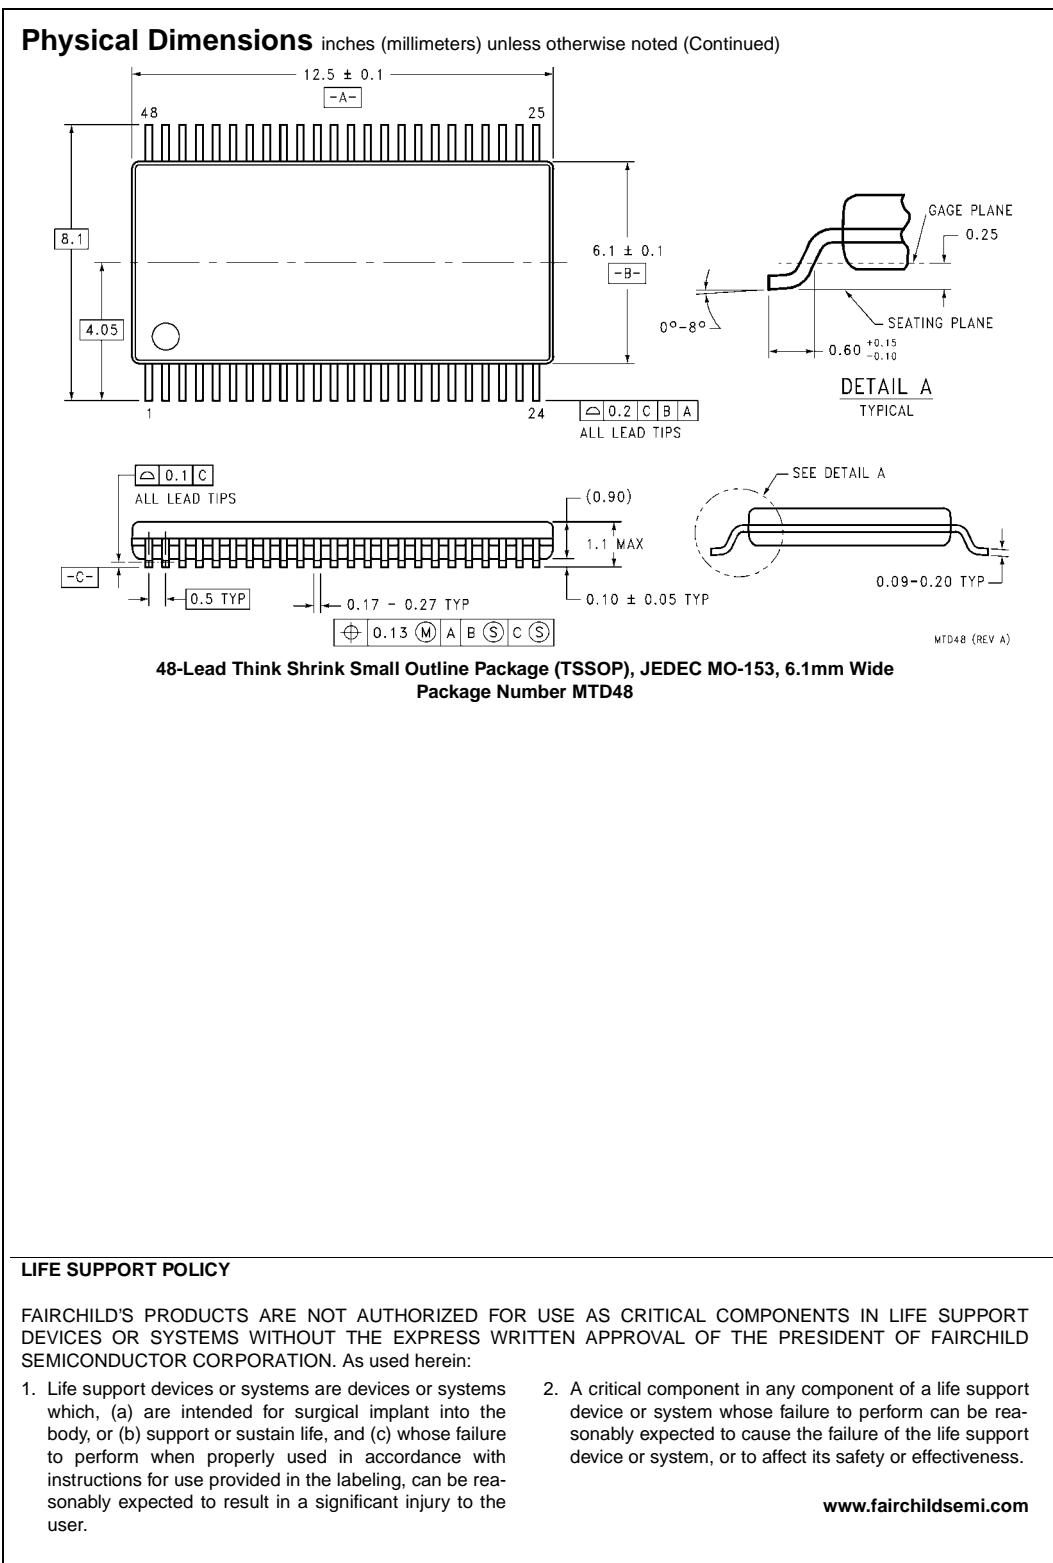

---

## **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)