


GENERAL PURPOSE APPLICATION,
SWITCHING APPLICATION.

FEATURES

- Excellent h_{FE} linearity
: $h_{FE(2)}=25$ Min. : $V_{CE}=6V$, $I_C=400mA$.
- Complementary to KTA1270.

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	35	V
Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	500	mA
Emitter Current	I_E	-500	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{slg}	-55~150	$^\circ C$

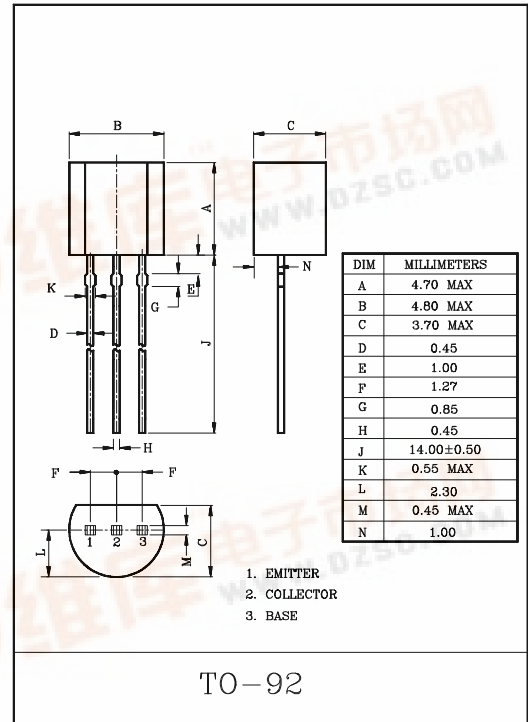

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=35V$, $I_E=0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V$, $I_C=0$	-	-	0.1	μA
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=1V$, $I_C=100mA$	70	-	240	
	$h_{FE(2)}$ (Note)	$V_{CE}=6V$, $I_C=400mA$	25	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA$, $I_B=10mA$	-	0.1	0.25	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=1V$, $I_C=100mA$	-	0.8	1.0	V
Transition Frequency	f_T	$V_{CE}=6V$, $I_C=20mA$	-	300	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=6V$, $f=1MHz$, $I_E=0$	-	7.0	-	pF

Note : $h_{FE(1)}$ Classification O:70~140, Y:120~240
 $h_{FE(2)}$ Classification O:25(MIN.), Y:40(MIN.)



KTC3202

