



G SERIES

6000VDC SINGLE AND DUAL OUTPUT PDC 2 WATT DC-DC CONVERTER

FEATURES

- 7 PIN SIP PACKAGE.
- 6000VDC ISOLATION.
- UNREGULATED OUTPUT TYPES.
- UL 94V-0 PACKAGE MATERIAL.

GENERAL SPECIFICATIONS

- OUTPUT RIPPLE(20MHz Band limited) : 150mVp-p MAX
- ISOLATION RESISTANCE : 1000MΩ MIN @500VDC
- SWITCHING FREQUENCY : 100KHz TYP.
- OPERATING TEMPERATURE : 0 °C TO 70°C
- EFFICIENCY : 70% TYP
- ISOLATION VOLTAGE : 6000 VDC

ELECTRICAL SPECIFICATIONS

- INPUT VOLTAGE RANGE : ±5%
- OUTPUT VOLTAGE TOLERANCE : ±5%
- LINE REGULATION(10% TO 100% F.L.) : 1.2%/1% OF Vin
- LOAD REGULATION(10% TO 100% F.L.) : 15% MAX
5V OUTPUT TYPES : 10% MAX
9V,12V AND 15V OUTPUT TYPES



5V,12V AND 24V INPUT TYPES

PART NUMBER	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	EFFICIENCY (% TYP.)	PACKAGE STYLE
GXX05S-1W	±5	±200	70	2
GXX09S-1W	±9	±112	75	2
GXX12S-1W	±12	±84	75	2
GXX15S-1W	±15	±68	75	2

48V INPUT TYPES

PART NUMBER	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	EFFICIENCY (% TYP.)	PACKAGE STYLE
G4805S-1W	±5	±200	70	2
G4809S-1W	±9	±112	75	2
G4812S-1W	±12	±84	75	2
G4815S-1W	±15	±68	75	2

MARKINGS AND DIMENSIONS

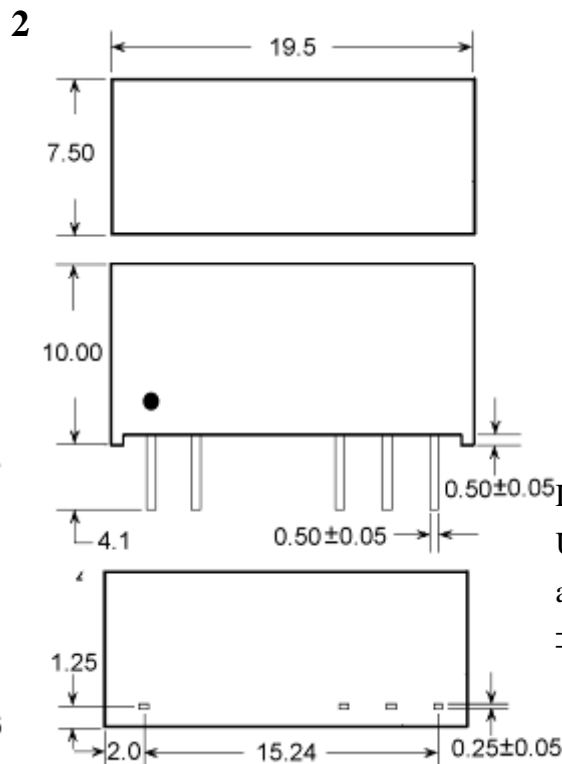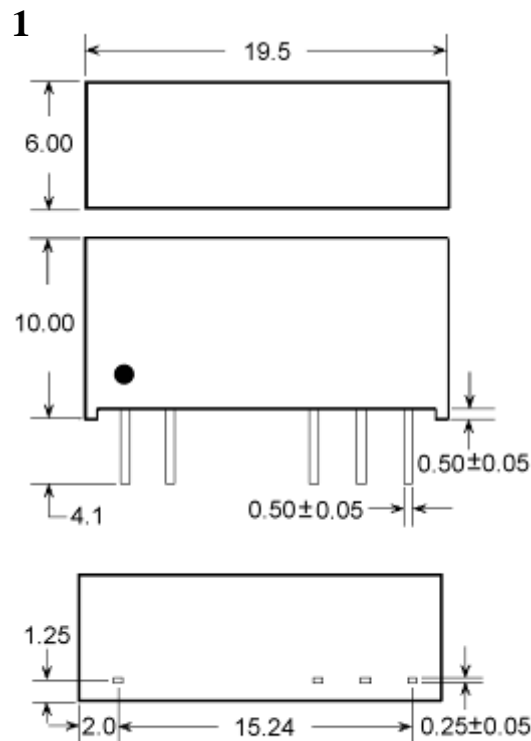

PIN CONNECTION

PIN	SINGLE
1	+INPUT
2	-INPUT
5	-OUTPUT
6	COM
7	+OUTPUT

Dimensions: inches/mm
Unless otherwise specified,
all tolerances are
±.005/±0.13