


Features

- Low Power Loss, High Efficiency
- Ideally Suited for Automatic Assembly
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V- 0

Mechanical Data

- Case: Moeded plastic SMAF
- Terminals: Plated leads solderable per MIL-STD-750,Method 2026 guaranteed
- Polarity: Color band dentes cathode end
- Mounting Position: Any
- Making: Type Number

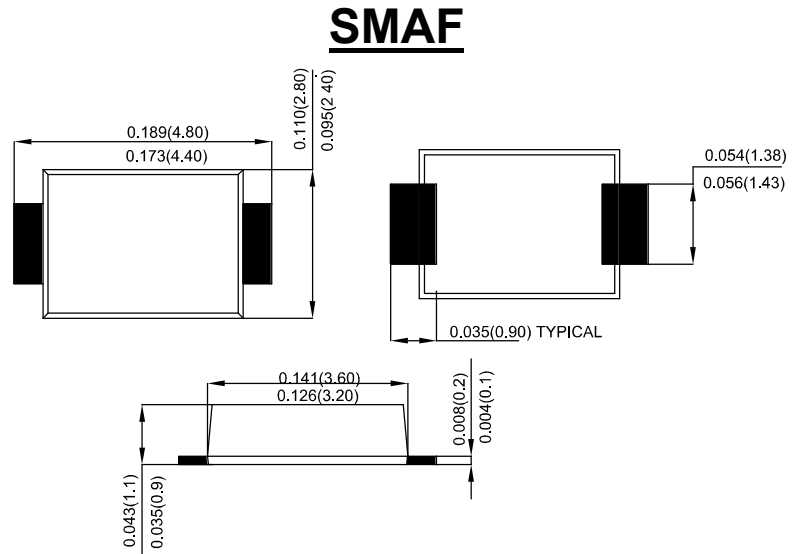

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	E2A	E2B	E2D	E2G	E2J	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	V
Average Rectified Output Current @T _A =75℃	I _O	2.0					A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	60					A
Forward Voltage @IF=2.0A	V _{FM}	0.95			1.25	1.7	V
Peak Reverse Current @T _A =25℃	I _R	5.0					uA
At Rated DC Blocking Voltage @T _A =100℃		150					
Maximum Reverse Recovery Time (Note 1)	T _{rr}	35					ns
Typical Junction Capacitance (Note 2)	C _J	25					pF
Typical Thermal Resistance Junction to Ambient(Note 3)	R _{θJA}	34					℃/W
Operating Temperature Range	T _J	-55 to+150					℃
Storage Temperature Range	T _{STG}	-55 to +150					℃

Note: 1. Reverse Recovery Test Conditions: $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$.
 2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C
 3. 8.0MM² (.013mm Thick) Land Areas.

