

MB05MA THRU MB10MA


SINGLE PHASE 1.0AMP SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

Features

- Glass Passivated Die Construction
- Low leakage
- Ideal for printed circuit board
- Surge overload rating-35A peak
- Designed for Surface Mount Application
- Plastic Material-UL Flammability 94V-0

Mechanical Data

- Case:Reliable low cost construction utilizing molded plastic technique
- Terminals:Plated Leads Solderable per MIL-STD-202,Method208
- Polarity:As Marked on Case
- Mounting Position:Any
- Marking:Type Number

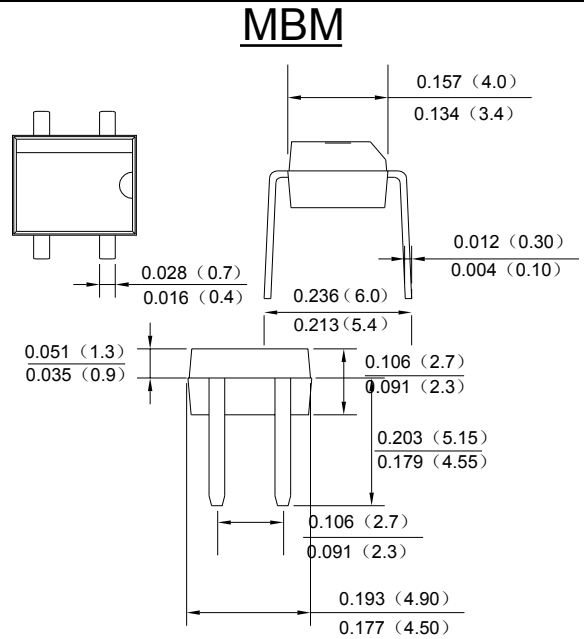

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
 Single Phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	MB05MA	MB1MA	MB2MA	MB4MA	MB6MA	MB8MA	MB10MA	UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Working Peak Reverse Voltage	V _{RWM}								
DC Blocking Voltage	V _{DC}								
RMS Reverse Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1)@T _A =40°C	I _O	1.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	35							A
Forward Voltage per element @I _F =1.0A	V _{FM}	1.1							V
Peak Reverse Current @T _A =25°C At Rated DC Blocking Voltage @T _A =125°C	I _R	5.0 500							uA
Typical Junction Capacitance per leg	C _J	13							pF
Typical Thermal Resistance per leg (Note 2)	R _{θJA}	70							°C/W
	R _{θJL}	20							
Operating and Storage Temperature Range	T _J , T _{STG}	-55to+150							°C

Note:1. Mounted on glass epoxy PC board with 1.3mm² solder pad.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

MB05MA THRU MB10MA

