


DISCRETE SEMICONDUCTORS

DATA SHEET

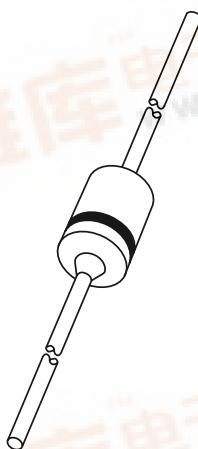

BYD73 series Ultra fast low-loss controlled avalanche rectifiers

Product specification

Supersedes data of 1996 May 24

1996 Sep 18

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack.

DESCRIPTION

Cavity free cylindrical glass SOD81 package through Implotec™⁽¹⁾ technology. This package is

hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

(1) Implotec is a trademark of Philips.




Fig.1 Simplified outline (SOD81) and symbol.

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RRM}	repetitive peak reverse voltage BYD73A BYD73B BYD73C BYD73D BYD73E BYD73F BYD73G		—	50	V
V_R	continuous reverse voltage BYD73A BYD73B BYD73C BYD73D BYD73E BYD73F BYD73G		—	100	V
$I_{F(AV)}$	average forward current BYD73A to D BYD73E to G	$T_{tp} = 55^\circ\text{C}$; lead length = 10 mm; see Figs 2 and 3; averaged over any 20 ms period; see also Figs 10 and 11	—	1.75	A
$I_{F(AV)}$	average forward current BYD73A to D BYD73E to G	$T_{amb} = 60^\circ\text{C}$; PCB mounting (see Fig.16); see Figs 4 and 5; averaged over any 20 ms period; see also Figs 10 and 11	—	1.00 0.95	A

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{FRM}	repetitive peak forward current BYD73A to D BYD73E to G	$T_{tp} = 55^\circ\text{C}$; see Figs 6 and 7	—	14 15	A A
I_{FRM}	repetitive peak forward current BYD73A to D BYD73E to G	$T_{amb} = 60^\circ\text{C}$; see Figs 8 and 9	— —	8.5 9.5	A A
I_{FSM}	non-repetitive peak forward current	$t = 10\text{ ms}$ half sine wave; $T_j = T_{j\ max}$ prior to surge; $V_R = V_{RRMmax}$	—	25	A
E_{RSM}	non-repetitive peak reverse avalanche energy	$L = 120\text{ mH}$; $T_j = T_{j\ max}$ prior to surge; inductive load switched off	—	10	mJ
T_{stg}	storage temperature		—65	+175	$^\circ\text{C}$
T_j	junction temperature		—65	+175	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

$T_j = 25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	forward voltage BYD73A to D BYD73E to G	$I_F = 1\text{ A}$; $T_j = T_{j\ max}$; see Figs 12 and 13	— —	— —	0.75 0.83	V V
V_F	forward voltage BYD73A to D BYD73E to G	$I_F = 1\text{ A}$; see Figs 12 and 13	— —	— —	0.98 1.05	V V
$V_{(BR)R}$	reverse avalanche breakdown voltage BYD73A BYD73B BYD73C BYD73D BYD73E BYD73F BYD73G	$I_R = 0.1\text{ mA}$	55 110 165 220 275 330 440	— — — — — — —	— — — — — — —	V V V V V V V
I_R	reverse current	$V_R = V_{RRMmax}$; see Fig.14	—	—	1	μA
		$V_R = V_{RRMmax}$; $T_j = 165^\circ\text{C}$; see Fig.14	—	—	100	μA
t_{rr}	reverse recovery time BYD73A to D BYD73E to G	when switched from $I_F = 0.5\text{ A}$ to $I_R = 1\text{ A}$; measured at $I_R = 0.25\text{ A}$; see Fig.18	— —	— —	25 50	ns ns

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
C_d	diode capacitance BYD73A to D BYD73E to G	$f = 1 \text{ MHz}; V_R = 0 \text{ V};$ see Fig.15	—	50	—	pF
$ \frac{dI_R}{dt} $	maximum slope of reverse recovery current BYD73A to D BYD73E to G	when switched from $I_F = 1 \text{ A}$ to $V_R \geq 30 \text{ V}$ and $dI_F/dt = -1 \text{ A}/\mu\text{s}$; see Fig.17	—	—	4	$\text{A}/\mu\text{s}$
			—	—	5	$\text{A}/\mu\text{s}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th \text{ j-tp}}$	thermal resistance from junction to tie-point	lead length = 10 mm	60	K/W
$R_{th \text{ j-a}}$	thermal resistance from junction to ambient	note 1	120	K/W


Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer $\geq 40 \mu\text{m}$, see Fig.16.
For more information please refer to the "General Part of associated Handbook".

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

GRAPHICAL DATA

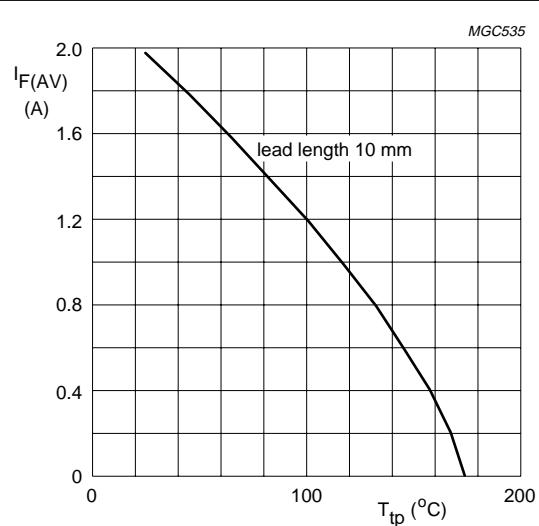


BYD73A to D

$a = 1.42$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Switched mode application.

Fig.2 Maximum permissible average forward current as a function of tie-point temperature (including losses due to reverse leakage).

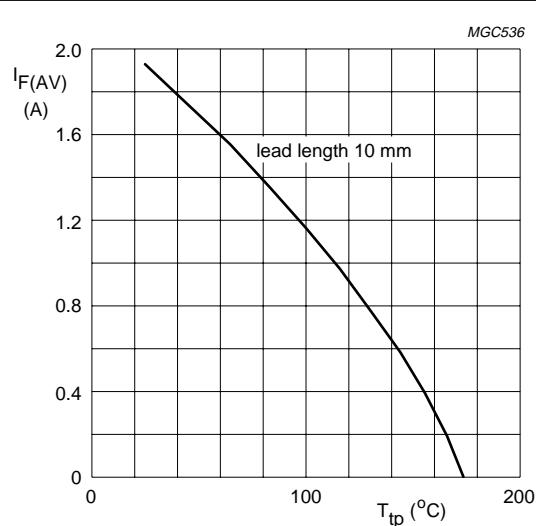


BYD73E to G

$a = 1.42$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Switched mode application.

Fig.3 Maximum permissible average forward current as a function of tie-point temperature (including losses due to reverse leakage).

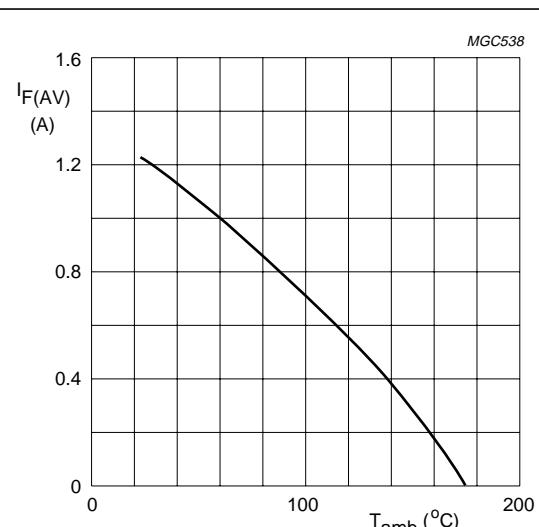


BYD73A to D

$a = 1.42$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Device mounted as shown in Fig.16.

Switched mode application.

Fig.4 Maximum permissible average forward current as a function of ambient temperature (including losses due to reverse leakage).

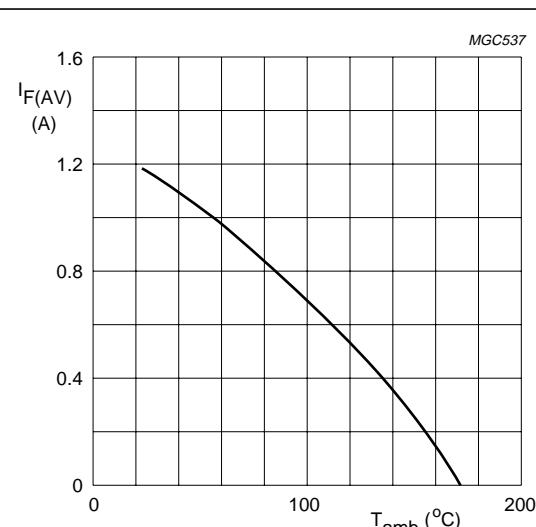

BYD73E to G

$a = 1.42$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Device mounted as shown in Fig.16.

Switched mode application.

Fig.5 Maximum permissible average forward current as a function of ambient temperature (including losses due to reverse leakage).

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

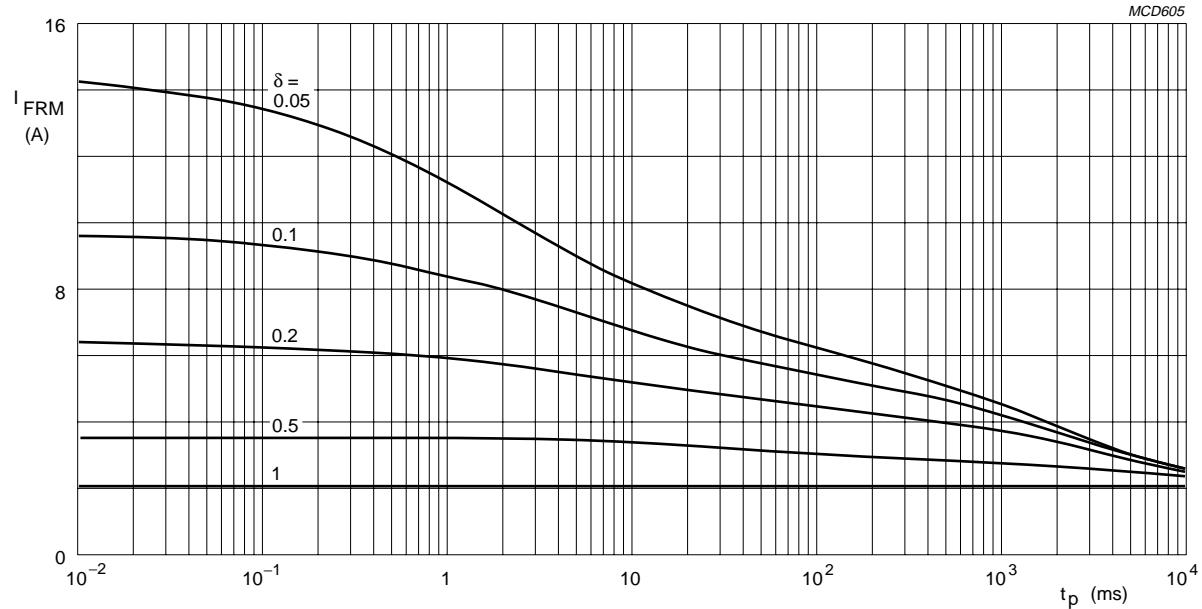


Fig.6 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.


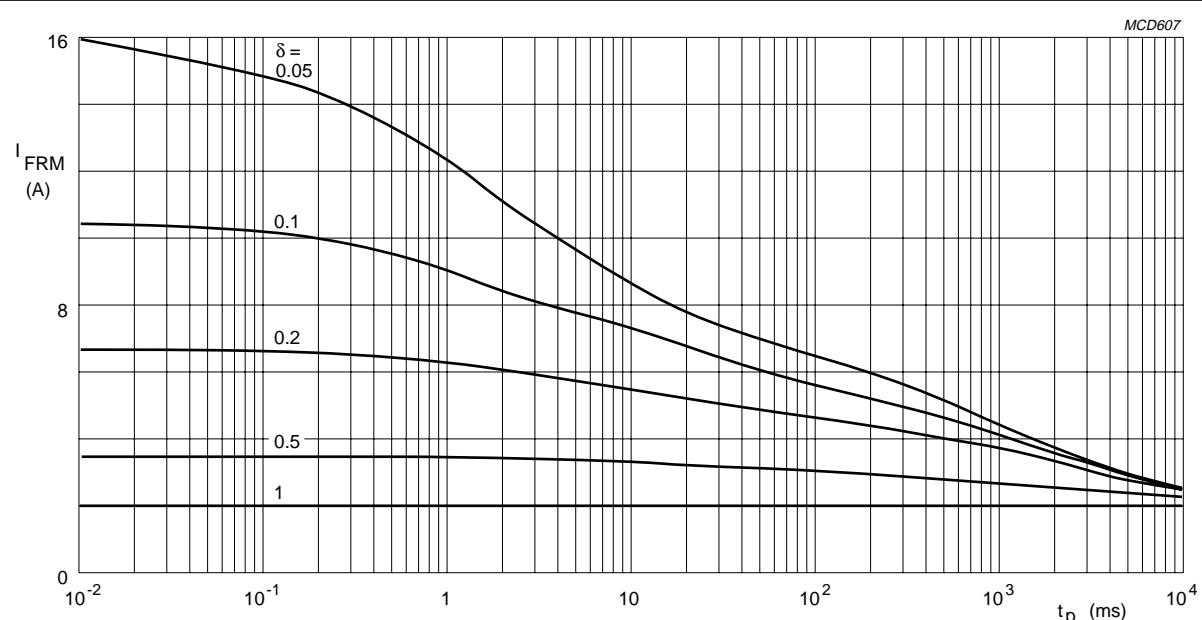


Fig.7 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

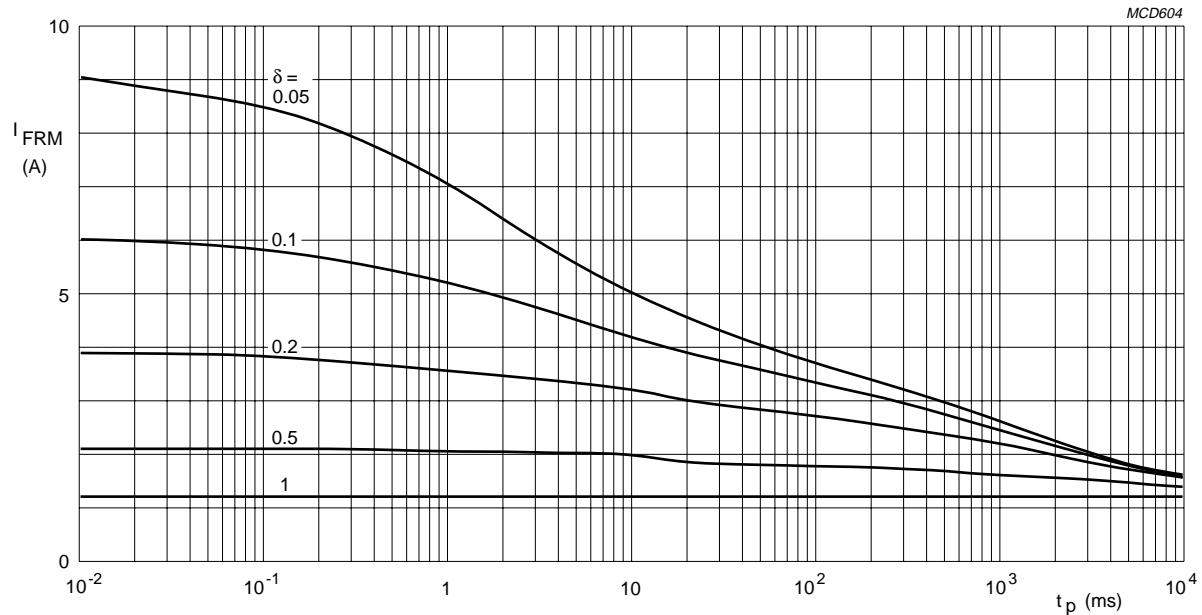


BYD73A to D

$T_{amb} = 60^{\circ}\text{C}$; $R_{th\ j-a} = 120 \text{ K/W}$.

V_{RRMmax} during $1 - \delta$; curves include derating for $T_{j\ max}$ at $V_{RRM} = 200 \text{ V}$.

Fig.8 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

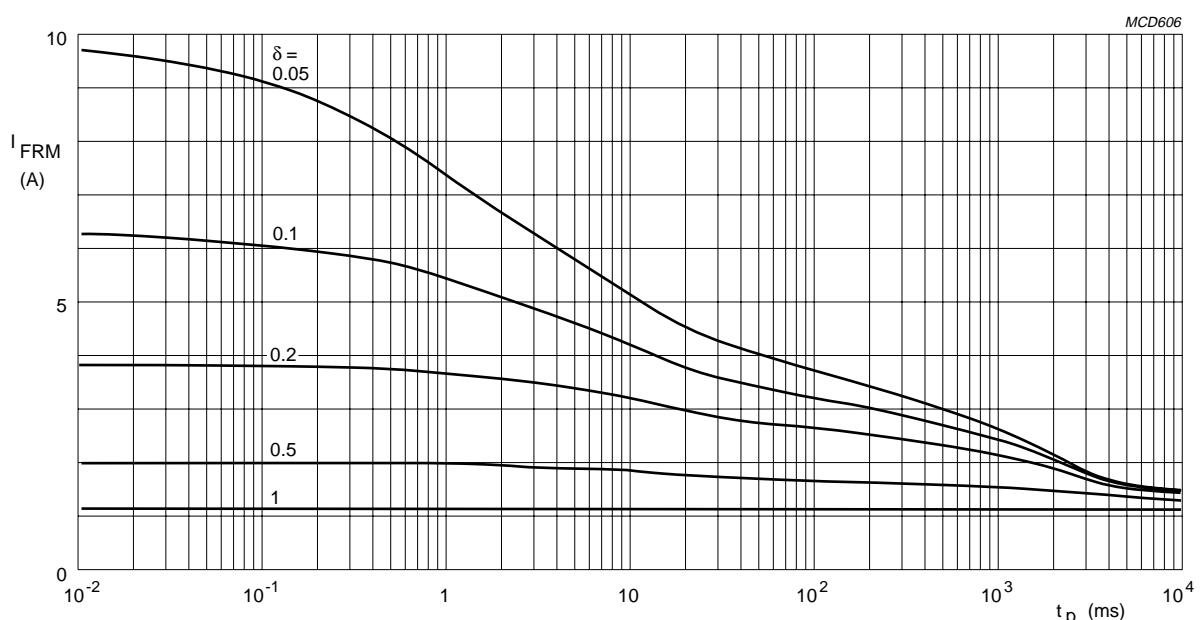

BYD73E to G


$T_{amb} = 60^{\circ}\text{C}$; $R_{th\ j-a} = 120 \text{ K/W}$.

V_{RRMmax} during $1 - \delta$; curves include derating for $T_{j\ max}$ at $V_{RRM} = 400 \text{ V}$.

Fig.9 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

Ultra fast low-loss controlled avalanche rectifiers


BYD73 series

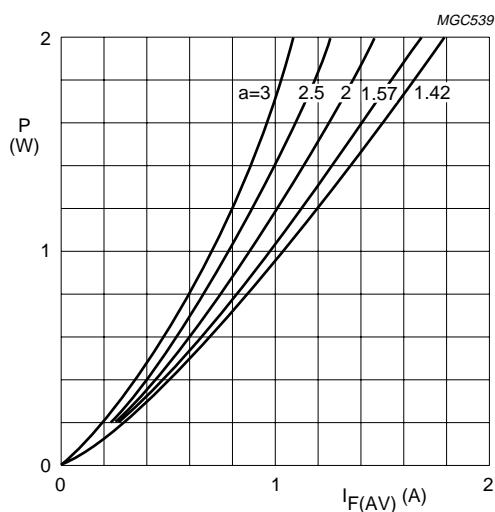

BYD73A to D

$a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RRMmax}$; $\delta = 0.5$.


Fig.10 Maximum steady state power dissipation (forward plus leakage current losses, excluding switching losses) as a function of average forward current.

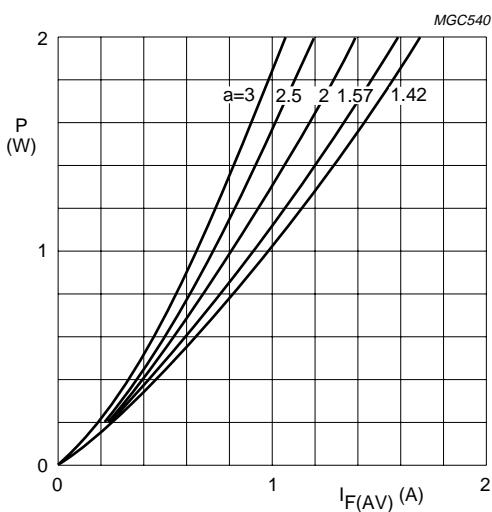

BYD73E to G

$a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Fig.11 Maximum steady state power dissipation (forward plus leakage current losses, excluding switching losses) as a function of average forward current.

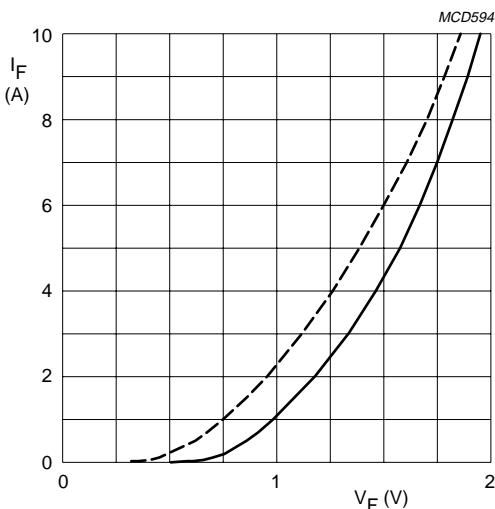


BYD73A to D

Dotted line: $T_j = 175$ °C.

Solid line: $T_j = 25$ °C.

Fig.12 Forward current as a function of forward voltage; maximum values.

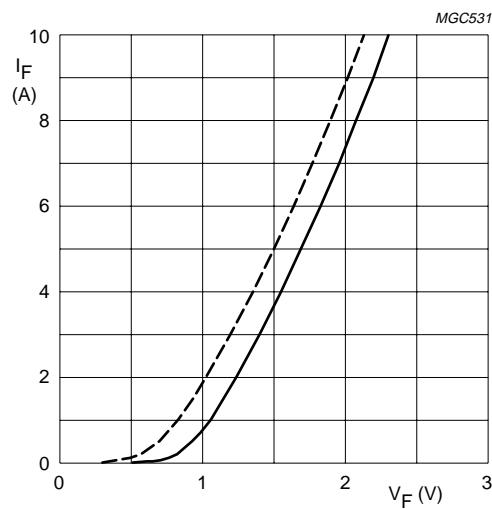

BYD73E to G


Dotted line: $T_j = 175$ °C.

Solid line: $T_j = 25$ °C.

Fig.13 Forward current as a function of forward voltage; maximum values.


Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

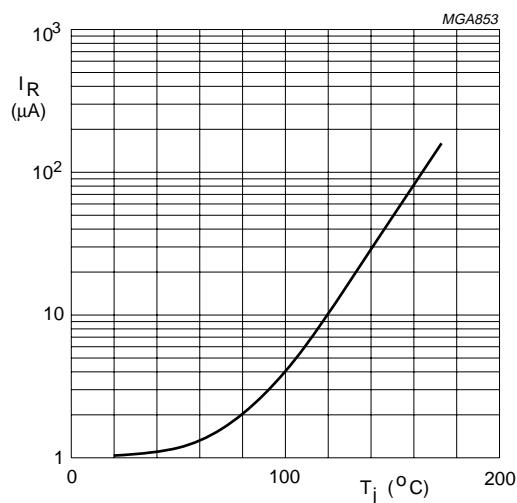


$V_R = V_{RRMmax}$

Fig.14 Reverse current as a function of junction temperature; maximum values.

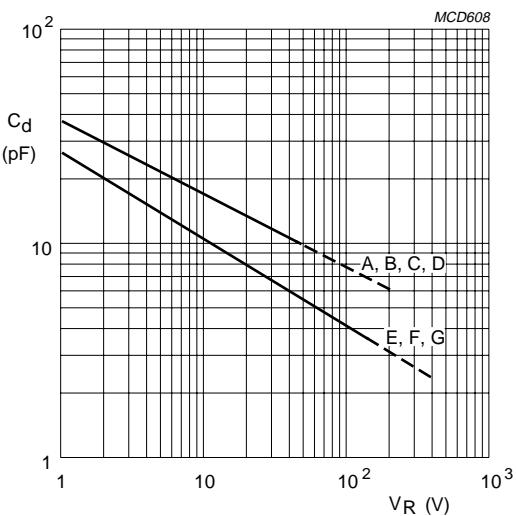

$f = 1$ MHz; $T_j = 25$ °C.

Fig.15 Diode capacitance as a function of reverse voltage; typical values.

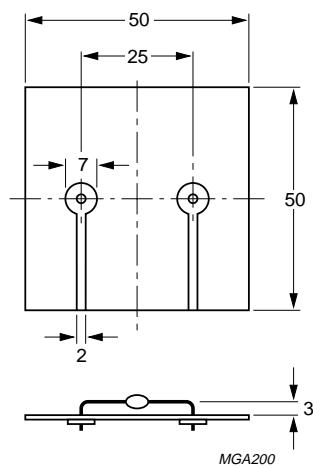

Dimensions in mm.

Fig.16 Device mounted on a printed-circuit board.



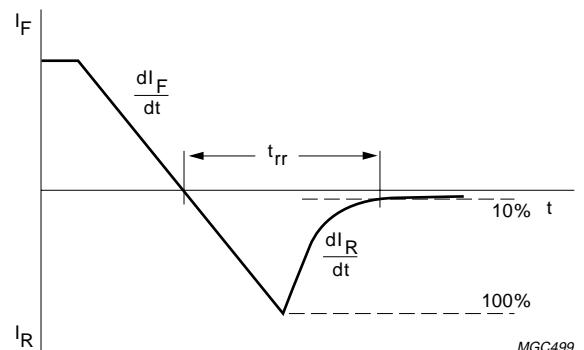


Fig.17 Reverse recovery definitions.

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

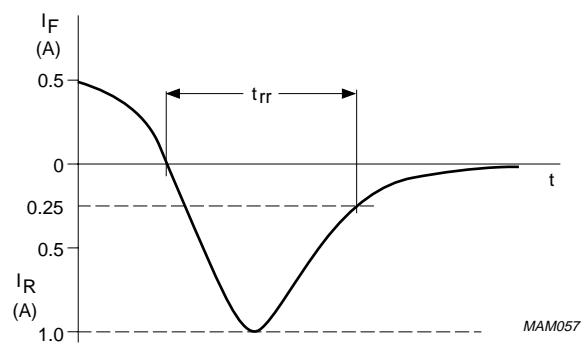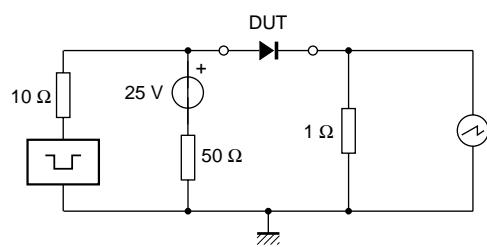

Input impedance oscilloscope: $1 \text{ M}\Omega$, 22 pF ; $t_r \leq 7 \text{ ns}$.


Source impedance: 50Ω ; $t_r \leq 15 \text{ ns}$.

Fig.18 Test circuit and reverse recovery time waveform and definition.

Ultra fast low-loss controlled avalanche rectifiers

BYD73 series

PACKAGE OUTLINE

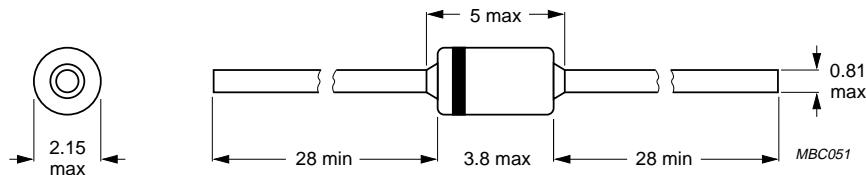

Dimensions in mm.

The marking band indicates the cathode.

Fig.19 SOD81.

DEFINITIONS

Data Sheet Status

Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.

Limiting values

Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information

Where application information is given, it is advisory and does not form part of the specification.

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.