


**14-BIT REGISTERED BUFFER  
WITH SSTL\_2 INPUTS AND OUTPUTS**

SCES344E – DECEMBER 2000 – REVISED NOVEMBER 2002

- Member of the Texas Instruments Widebus™ Family
- Supports SSTL\_2 Data Inputs
- Outputs Meet SSTL\_2 Class II Specifications
- Differential Clock (CLK and  $\overline{\text{CLK}}$ ) Inputs
- Supports LVCMOS Switching Levels on the  $\overline{\text{RESET}}$  Input
- $\overline{\text{RESET}}$  Input Disables Differential Input Receivers, Resets All Registers, and Forces All Outputs Low
- Flow-Through Architecture Optimizes PCB Layout
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

DGG PACKAGE  
(TOP VIEW)

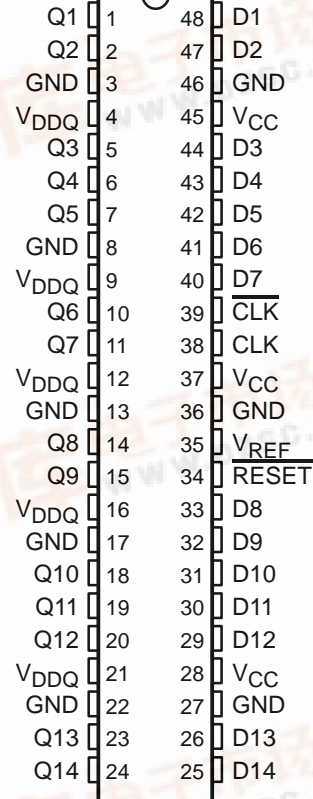

**description**

This 14-bit registered buffer is designed for 2.3-V to 2.7-V  $V_{CC}$  operation.

All inputs are SSTL\_2, except the LVCMOS reset ( $\overline{\text{RESET}}$ ) input. All outputs are SSTL\_2, Class II compatible.

The SN74SSTV16857 operates from a differential clock (CLK and  $\overline{\text{CLK}}$ ). Data are registered at the crossing of CLK going high and  $\overline{\text{CLK}}$  going low.

The device supports low-power standby operation. When  $\overline{\text{RESET}}$  is low, the differential input receivers are disabled and undriven (floating) data, clock, and reference voltage ( $V_{REF}$ ) inputs are allowed. In addition, when  $\overline{\text{RESET}}$  is low, all registers are reset and all outputs are forced low. The LVCMOS  $\overline{\text{RESET}}$  input always must be held at a valid logic high or low level.

To ensure defined outputs from the register before a stable clock has been supplied,  $\overline{\text{RESET}}$  must be held in the low state during power up.

**ORDERING INFORMATION**

TA	PACKAGE†	ORDERABLE PART NUMBER	TOP-SIDE MARKING
0°C to 70°C	TSSOP – DGG   Tape and reel	SN74SSTV16857DGGR	SSTV16857

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




**SN74SSTV16857**  
**14-BIT REGISTERED BUFFER**  
**WITH SSTL 2 INPUTS AND OUTPUTS**  
 SCES344E – DECEMBER 2000 – REVISED NOVEMBER 2002

FUNCTION TABLE

INPUTS				OUTPUT
RESET	CLK	CLK	D	Q
H	↑	↓	H	H
H	↑	↓	L	L
H	L or H	L or H	X	Q <sub>0</sub>
L	X, or floating	X, or floating	X, or floating	L

logic diagram (positive logic)

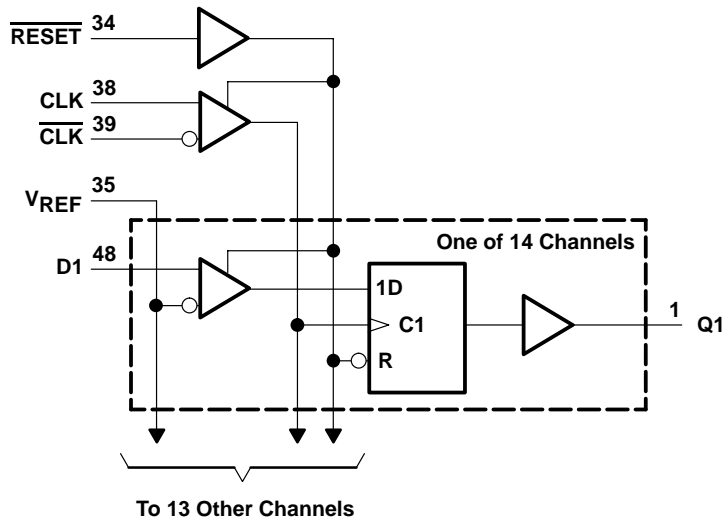

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, $V_{CC}$ or $V_{DDQ}$	-0.5 V to 3.6 V
Input voltage range, $V_I$ (see Notes 1 and 2)	-0.5 V to $V_{CC} + 0.5$ V
Output voltage range, $V_O$ (see Notes 1 and 2)	-0.5 V to $V_{DDQ} + 0.5$ V
Input clamp current, $I_{IK}$ ( $V_I < 0$ )	-50 mA
Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{DDQ}$ )	±50 mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{DDQ}$ )	±50 mA
Continuous current through each $V_{CC}$ , $V_{DDQ}$ , or GND	±100 mA
Package thermal impedance, $\theta_{JA}$ (see Note 3)	70°C/W
Storage temperature range, $T_{stg}$	-65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.  
 2. This value is limited to 3.6 V maximum.  
 3. The package thermal impedance is calculated in accordance with JESD 51-7.

**SN74SSTV16857**  
**14-BIT REGISTERED BUFFER**  
**WITH SSTL 2 INPUTS AND OUTPUTS**  
SCES344E – DECEMBER 2000 – REVISED NOVEMBER 2002

**recommended operating conditions (see Note 4)**

		MIN	NOM	MAX	UNIT	
V <sub>CC</sub>	Supply voltage	V <sub>DDQ</sub>		2.7	V	
V <sub>DDQ</sub>	Output supply voltage	2.3		2.7	V	
V <sub>REF</sub>	Reference voltage (V <sub>REF</sub> = V <sub>DDQ</sub> /2)	1.15	1.25	1.35	V	
V <sub>TT</sub>	Termination voltage	V <sub>REF</sub> -40mV	V <sub>REF</sub>	V <sub>REF</sub> +40mV	V	
V <sub>I</sub>	Input voltage	0		V <sub>CC</sub>	V	
V <sub>IH</sub>	AC high-level input voltage	Data inputs		V <sub>REF</sub> +310mV	V	
V <sub>IL</sub>	AC low-level input voltage	Data inputs		V <sub>REF</sub> -310mV	V	
V <sub>IH</sub>	DC high-level input voltage	Data inputs		V <sub>REF</sub> +150mV	V	
V <sub>IL</sub>	DC low-level input voltage	Data inputs		V <sub>REF</sub> -150mV	V	
V <sub>IH</sub>	High-level input voltage	RESET		1.7	V	
V <sub>IL</sub>	Low-level input voltage	RESET		0.7	V	
V <sub>ICR</sub>	Common-mode input voltage range	CLK, CLK		0.97	1.53	V
V <sub>I(PP)</sub>	Peak-to-peak input voltage	CLK, CLK		360	mV	
I <sub>OH</sub>	High-level output current			-20	mA	
I <sub>OL</sub>	Low-level output current			20		
T <sub>A</sub>	Operating free-air temperature	0		70	°C	

NOTE 4: The RESET input of the device must be held at a valid logic level (not floating) to ensure proper device operation. The differential inputs must not be floating unless RESET is low. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER		TEST CONDITIONS	V <sub>CC</sub> AND V <sub>DDQ</sub>	MIN	TYP†	MAX	UNIT
V <sub>IK</sub>		I <sub>I</sub> = -18 mA	2.3 V			-1.2	V
V <sub>OH</sub>		I <sub>OH</sub> = -100 μA	2.3 V to 2.7 V	V <sub>DDQ</sub> -0.2			V
		I <sub>OH</sub> = -16 mA	2.3 V	1.95			
V <sub>OL</sub>		I <sub>OL</sub> = 100 μA	2.3 V to 2.7 V			0.2	V
		I <sub>OL</sub> = 16 mA	2.3 V			0.35	
I <sub>I</sub>	All inputs	V <sub>I</sub> = V <sub>CC</sub> or GND	2.7 V			±5	μA
I <sub>CC</sub>	Static standby	RESET = GND	2.7 V			10	μA
	Static operating	RESET = V <sub>CC</sub> , V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub>		I <sub>O</sub> = 0		8	
I <sub>CCD</sub>	Dynamic operating – clock only	RESET = V <sub>CC</sub> , V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub> , CLK and CLK switching 50% duty cycle	2.5 V	I <sub>O</sub> = 0		28	μA/MHz
	Dynamic operating – per each data input	RESET = V <sub>CC</sub> , V <sub>I</sub> = V <sub>IH(AC)</sub> or V <sub>IL(AC)</sub> , CLK and CLK switching 50% duty cycle, One data input switching at one-half clock frequency, 50% duty cycle		I <sub>O</sub> = 0		9	μA/clock MHz/D input
r <sub>OH</sub>	Output high	I <sub>OH</sub> = -20 mA	2.3 V to 2.7 V	7		20	Ω
r <sub>OL</sub>	Output low	I <sub>OL</sub> = 20 mA	2.3 V to 2.7 V	7		20	Ω
r <sub>O(Δ)</sub>	r <sub>OH</sub> - r <sub>OL</sub>	I <sub>O</sub> = 20 mA, T <sub>A</sub> = 25°C	2.5 V			6	Ω
C <sub>i</sub>	Data inputs	V <sub>I</sub> = V <sub>REF</sub> ± 310 mV	2.5 V	2.5	3	3.5	pF
	CLK, CLK	V <sub>ICR</sub> = 1.25 V, V <sub>I(PP)</sub> = 360 mV		2.5	3	3.5	
	RESET	V <sub>I</sub> = V <sub>CC</sub> or GND		2.5	3	3.5	

† All typical values are at V<sub>CC</sub> = 2.5 V, T<sub>A</sub> = 25°C.

**SN74SSTV16857**  
**14-BIT REGISTERED BUFFER**  
**WITH SSTL 2 INPUTS AND OUTPUTS**

SCES344E – DECEMBER 2000 – REVISED NOVEMBER 2002

**timing requirements over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)**

		$V_{CC} = 2.5\text{ V}$ $\pm 0.2\text{ V}^\dagger$		UNIT	
		MIN	MAX		
$f_{\text{clock}}$	Clock frequency	200		MHz	
$t_w$	Pulse duration	CLK, $\overline{\text{CLK}}$ high or low		ns	
$t_{\text{act}}$	Differential inputs active time (see Note 5)	22		ns	
$t_{\text{inact}}$	Differential inputs inactive time (see Note 6)	22		ns	
$t_{\text{su}}$	Setup time	Fast slew rate (see Notes 7 and 9)	Data before CLK $\uparrow$ , $\overline{\text{CLK}}\downarrow$	0.75	ns
		Slow slew rate (see Notes 8 and 9)		0.9	
$t_h$	Hold time	Fast slew rate (see Notes 7 and 9)	Data after CLK $\uparrow$ , $\overline{\text{CLK}}\downarrow$	0.75	ns
		Slow slew rate (see Notes 8 and 9)		0.9	

$^\dagger$  For this test condition,  $V_{DDQ}$  always is equal to  $V_{CC}$ .


- NOTES: 5. Data inputs must be held low for a minimum time of  $t_{\text{act}}$  min, after  $\overline{\text{RESET}}$  is taken high.  
6. Data and clock inputs must be held at valid levels (not floating) for a minimum time of  $t_{\text{inact}}$  min, after  $\overline{\text{RESET}}$  is taken low.  
7. Data signal input slew rate  $\geq 1$  V/ns  
8. Data signal input slew rate  $\geq 0.5$  V/ns and  $< 1$  V/ns  
9. CLK,  $\overline{\text{CLK}}$  input slew rates are  $\geq 1$  V/ns.

**switching characteristics over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 2.5\text{ V}$ $\pm 0.2\text{ V}^\dagger$		UNIT
			MIN	MAX	
$f_{\text{max}}$			200		MHz
$t_{\text{pd}}$	CLK and $\overline{\text{CLK}}$	Q	1.1	2.8	ns
$t_{\text{PHL}}$	$\overline{\text{RESET}}$	Q	5		ns

$^\dagger$  For this test condition,  $V_{DDQ}$  always is equal to  $V_{CC}$ .

**PARAMETER MEASUREMENT INFORMATION**

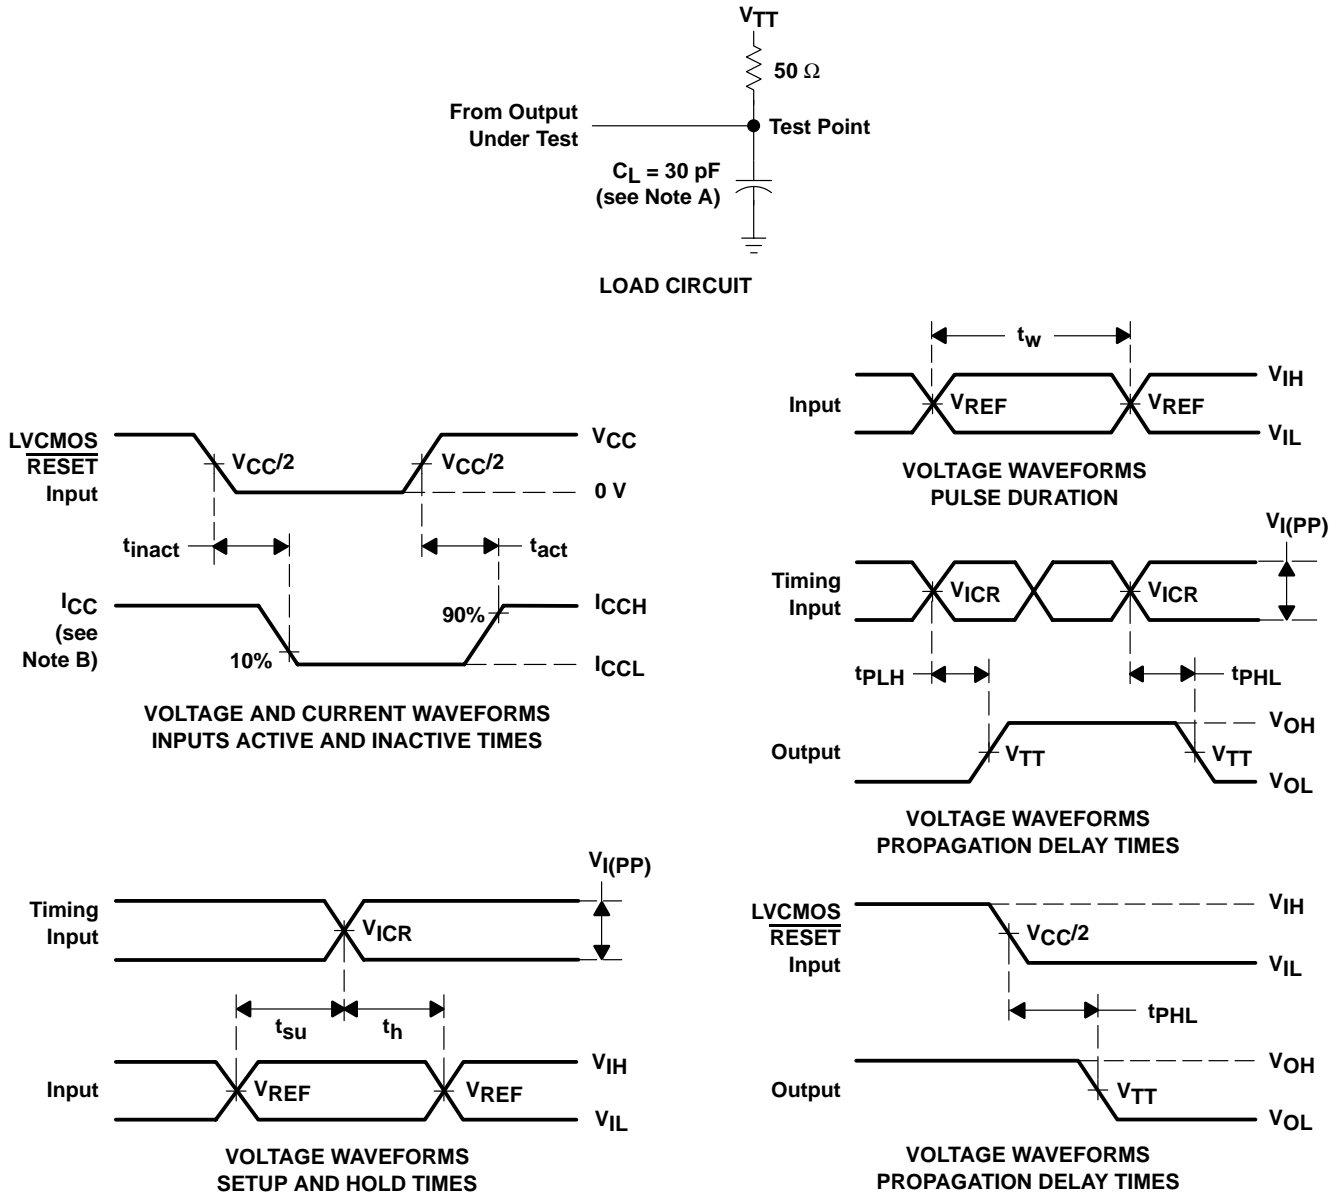

- NOTES:
- A.  $C_L$  includes probe and jig capacitance.
  - B.  $I_{CC}$  tested with clock and data inputs held at  $V_{CC}$  or GND, and  $I_O = 0$  mA.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq 10$  MHz,  $Z_O = 50 \Omega$ , input slew rate = 1 V/ns  $\pm 20\%$  (unless otherwise noted).
  - D. The outputs are measured one at a time with one transition per measurement.
  - E.  $V_{TT} = V_{REF} = V_{DDQ}/2$
  - F.  $V_{IH} = V_{REF} + 310$  mV (ac voltage levels) for differential inputs.  $V_{IH} = V_{CC}$  for LVC MOS input.
  - G.  $V_{IL} = V_{REF} - 310$  mV (ac voltage levels) for differential inputs.  $V_{IL} = \text{GND}$  for LVC MOS input.
  - H.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

**Figure 1. Load Circuit and Voltage Waveforms**

**PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
HPA00021DGGR	ACTIVE	TSSOP	DGG	48		None	CU NIPDAU	Level-1-220C-UNLIM
SN74SSTV16857DGGR	ACTIVE	TSSOP	DGG	48	2000	None	CU NIPDAU	Level-1-220C-UNLIM
SN74SSTV16857DGVR	ACTIVE	TVSOP	DGV	48	2000	None	CU NIPDAU	Level-1-250C-UNLIM

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - May not be currently available - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**None:** Not yet available Lead (Pb-Free).

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


# MECHANICAL DATA

MPDS006C – FEBRUARY 1996 – REVISED AUGUST 2000

## DGV (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

24 PINS SHOWN

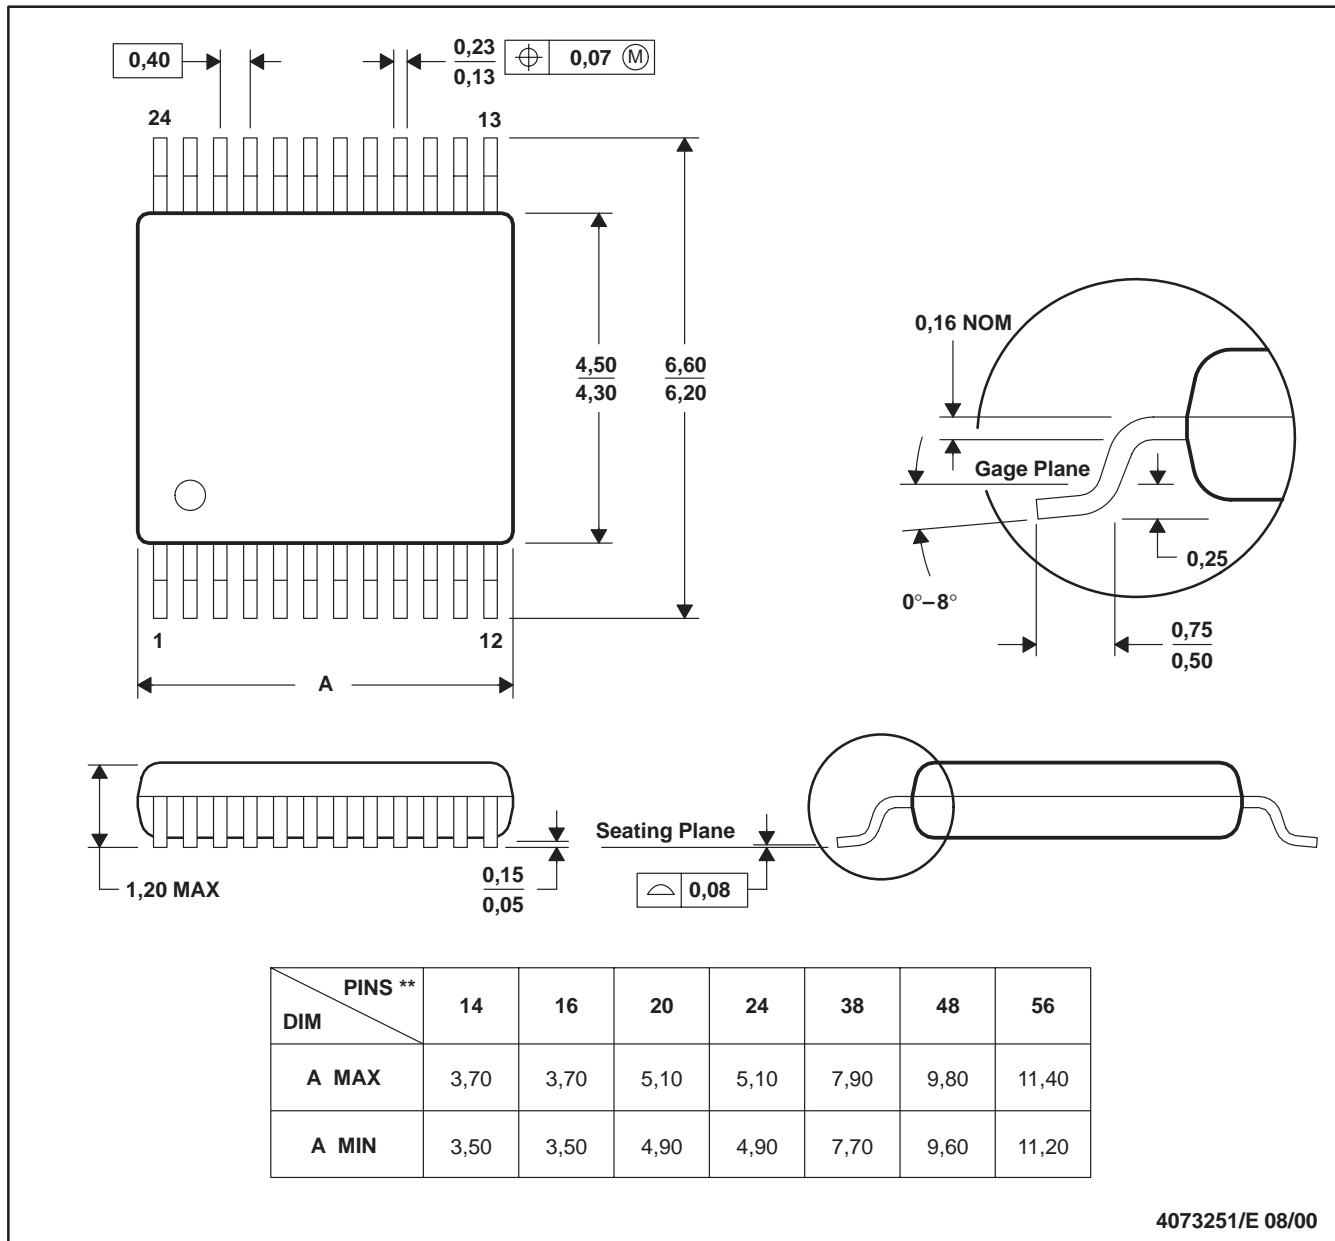

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.  
 D. Falls within JEDEC: 24/48 Pins – MO-153  
 14/16/20/56 Pins – MO-194


# MECHANICAL DATA

MTSS003D – JANUARY 1995 – REVISED JANUARY 1998

**DGG (R-PDSO-G\*\*)**

**PLASTIC SMALL-OUTLINE PACKAGE**

48 PINS SHOWN

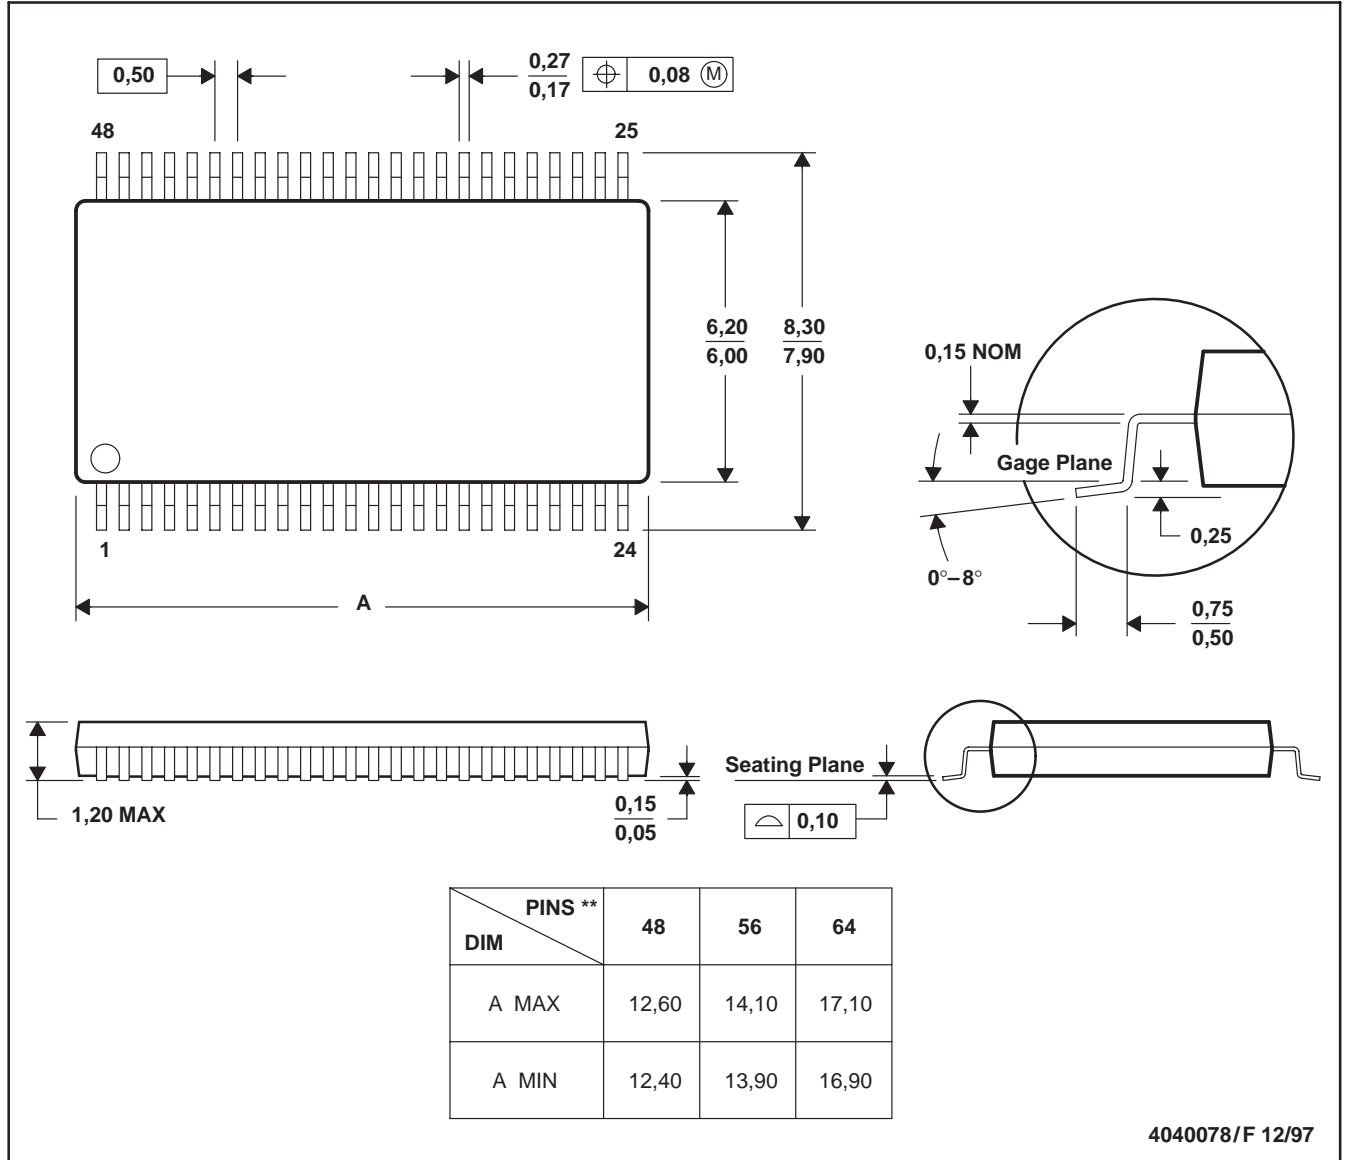

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold protrusion not to exceed 0,15.
  - Falls within JEDEC MO-153



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
		Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265