


MITSUBISHI Nch POWER MOSFET

FK18SM-10

HIGH-SPEED SWITCHING USE


FK18SM-10

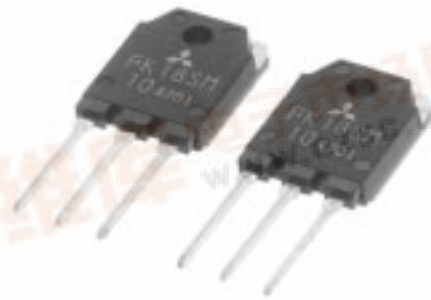

- V_{DSS} 500V
- r_{DS} (ON) (MAX) 0.50Ω
- I_D 18A
- Integrated Fast Recovery Diode (MAX.) 150ns

OUTLINE DRAWING

Dimensions in mm

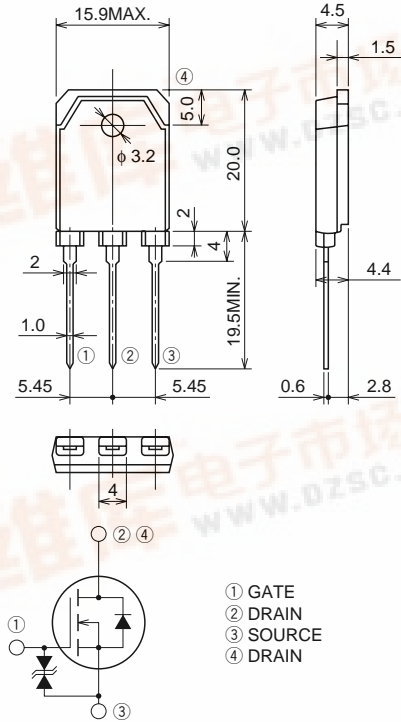

APPLICATION

Servo motor drive, Robot, UPS, Inverter Fluorecent lamp, etc.

MAXIMUM RATINGS (T_c = 25°C)

| Symbol | Parameter | Conditions | Ratings | Unit |
|------------------|---------------------------|----------------------|------------|------|
| V _{DSS} | Drain-source voltage | V _{GS} = 0V | 500 | V |
| V _{GSS} | Gate-source voltage | V _{DS} = 0V | ±30 | V |
| I _D | Drain current | | 18 | A |
| I _{DM} | Drain current (Pulsed) | | 54 | A |
| I _S | Source current | | 18 | A |
| I _{SM} | Source current (Pulsed) | | 54 | A |
| P _D | Maximum power dissipation | | 250 | W |
| T _{ch} | Channel temperature | | -55 ~ +150 | °C |
| T _{stg} | Storage temperature | | -55 ~ +150 | °C |
| — | Weight | Typical value | 4.8 | g |



FK18SM-10

HIGH-SPEED SWITCHING USE

ELECTRICAL CHARACTERISTICS (T_{ch} = 25°C)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------------|----------------------------------|--------------------------------------------------------------------------------------------------------------|--------|------|------|------|
| | | | Min. | Typ. | Max. | |
| V (BR) DSS | Drain-source breakdown voltage | I _D = 1mA, V _{GS} = 0V | 500 | — | — | V |
| V (BR) GSS | Gate-source breakdown voltage | I _G = ±100μA, V _{DS} = 0V | ±30 | — | — | V |
| I _{GSS} | Gate-source leakage current | V _{GS} = ±25V, V _{DS} = 0V | — | — | ±10 | μA |
| I _{DSS} | Drain-source leakage current | V _{DS} = 500V, V _{GS} = 0V | — | — | 1 | mA |
| V _{GS} (th) | Gate-source threshold voltage | I _D = 1mA, V _{DS} = 10V | 2 | 3 | 4 | V |
| r _{DS} (ON) | Drain-source on-state resistance | I _D = 9A, V _{GS} = 10V | — | 0.38 | 0.50 | Ω |
| V _{DS} (ON) | Drain-source on-state voltage | I _D = 9A, V _{GS} = 10V | — | 3.42 | 4.50 | V |
| y _{fs} | Forward transfer admittance | I _D = 9A, V _{DS} = 10V | 7.0 | 10.0 | — | S |
| C _{iss} | Input capacitance | V _{DS} = 25V, V _{GS} = 0V, f = 1MHz | — | 2200 | — | pF |
| C _{oss} | Output capacitance | | — | 300 | — | pF |
| C _{rss} | Reverse transfer capacitance | | — | 45 | — | pF |
| t _d (on) | Turn-on delay time | V _{DD} = 200V, I _D = 9A, V _{GS} = 10V, R _{GEN} = R _{GS} = 50Ω | — | 40 | — | ns |
| t _r | Rise time | | — | 80 | — | ns |
| t _d (off) | Turn-off delay time | | — | 200 | — | ns |
| t _f | Fall time | | — | 80 | — | ns |
| V _{SD} | Source-drain voltage | I _S = 9A, V _{GS} = 0V | — | 1.5 | 2.0 | V |
| R _{th} (ch-c) | Thermal resistance | Channel to case | — | — | 0.50 | °C/W |
| t _{rr} | Reverse recovery time | I _S = 18A, di/dt = -100A/μs | — | — | 150 | ns |


PERFORMANCE CURVES

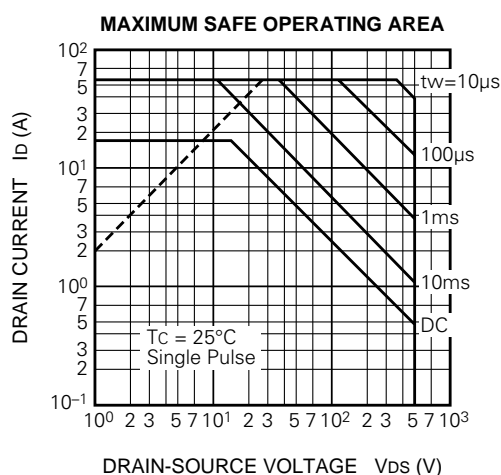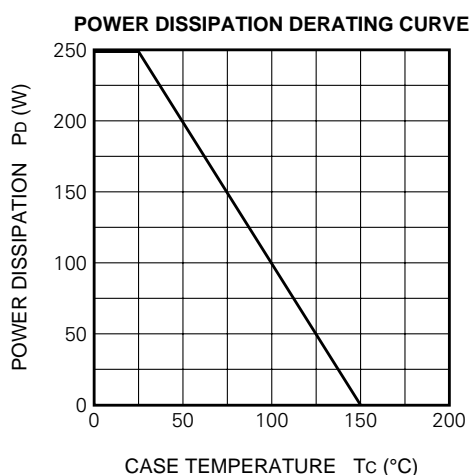


FK18SM-10

HIGH-SPEED SWITCHING USE


OUTPUT CHARACTERISTICS (TYPICAL)

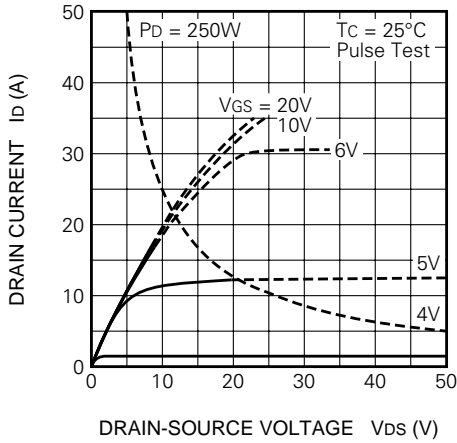


OUTPUT CHARACTERISTICS (TYPICAL)

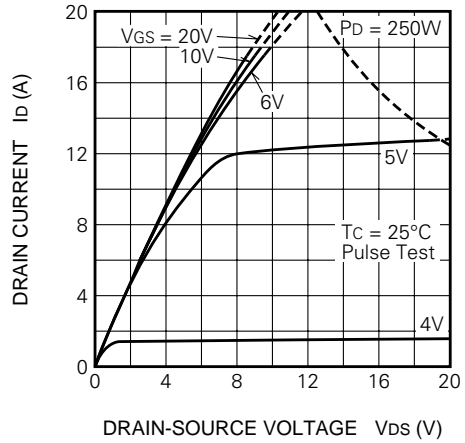


ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

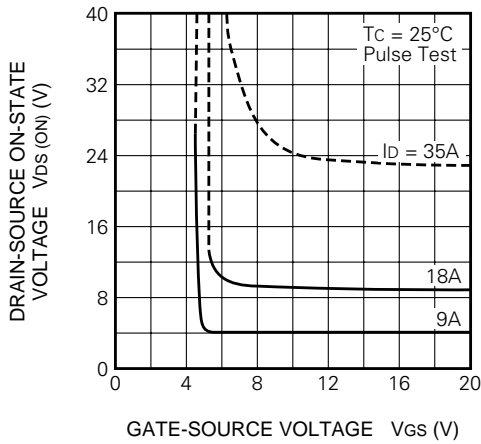


ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

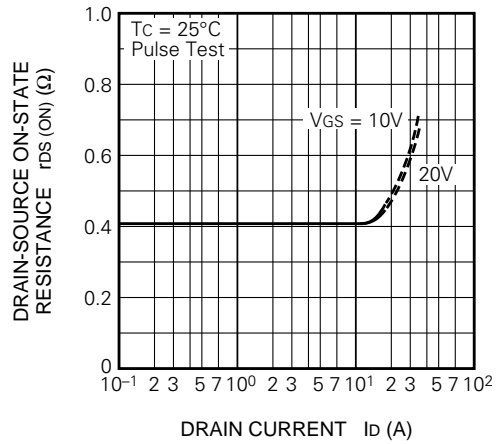


TRANSFER CHARACTERISTICS (TYPICAL)

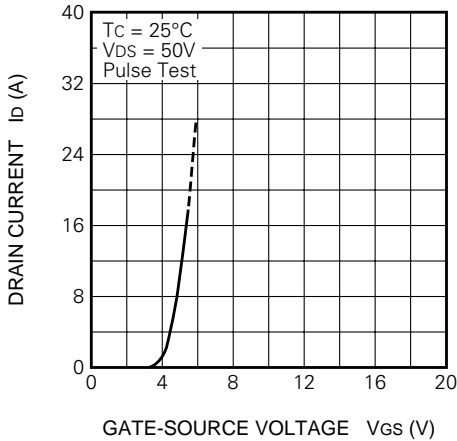


FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT (TYPICAL)

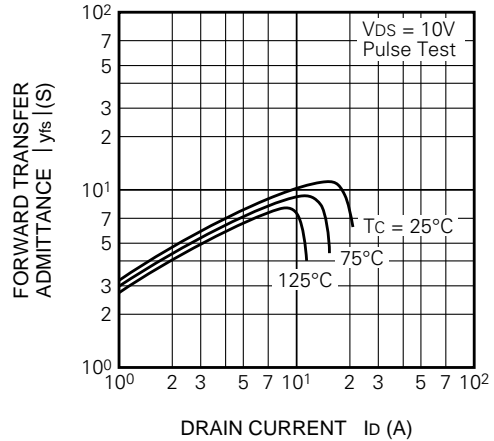


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

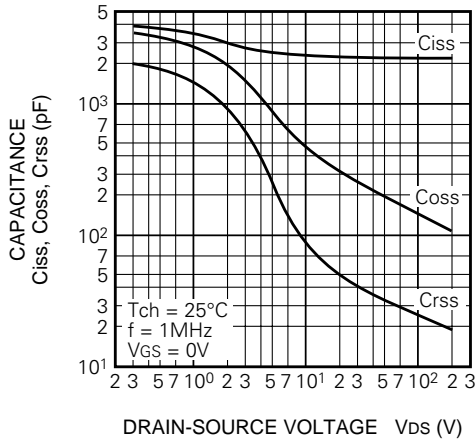


SWITCHING CHARACTERISTICS (TYPICAL)

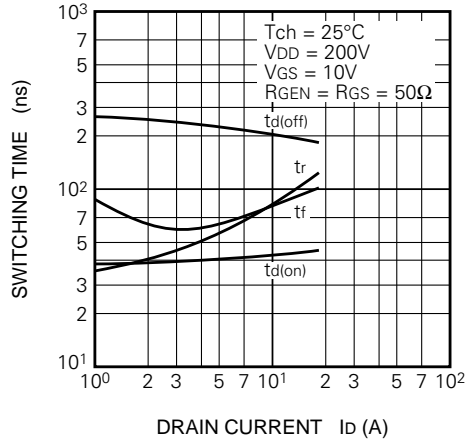


GATE-SOURCE VOLTAGE VS. GATE CHARGE (TYPICAL)

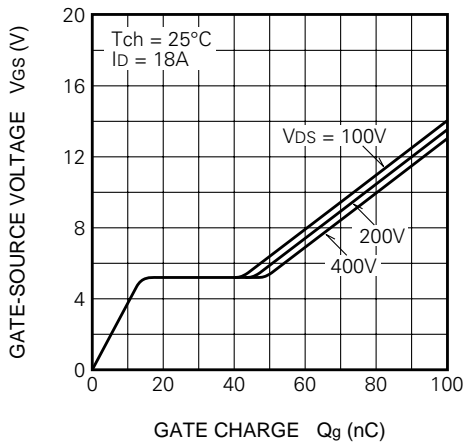


SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL)

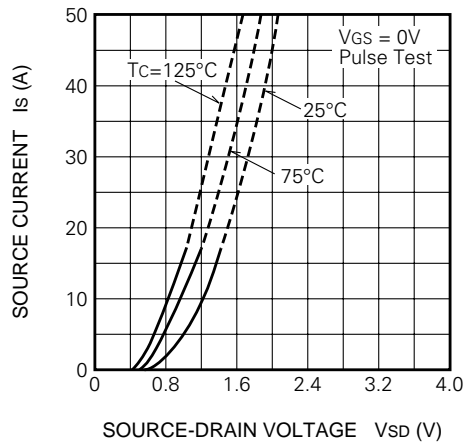

ON-STATE RESISTANCE VS. CHANNEL TEMPERATURE (TYPICAL)

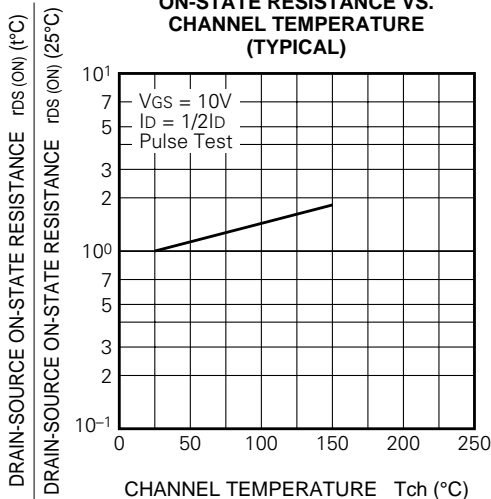

THRESHOLD VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

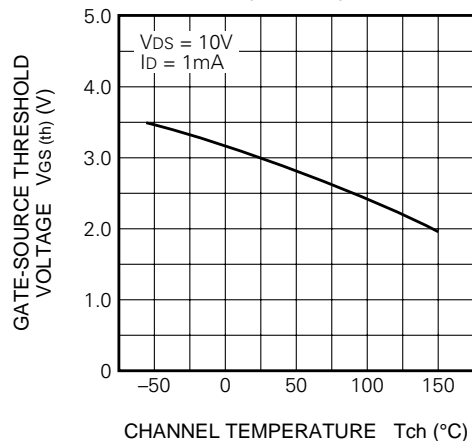

FK18SM-10

HIGH-SPEED SWITCHING USE

