



Micro Commercial Components
 21201 Itasca Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

FST16020 THRU FST160100

Features

- Metal of siliconrectifier, majonty carrier conducton
- Guard ring for transient protection
- Low power loss high efficiency
- High surge capacity, High current capability


**160 Amp
 Schottky Barrier
 Rectifier
 20 to 100 Volts**

Maximum Ratings

- Operating Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +150°C

| MCC Part Number | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-----------------|--|---------------------|-----------------------------|
| FST16020 | 20V | 14V | 20V |
| FST16030 | 30V | 21V | 30V |
| FST16035 | 35V | 24.5V | 35V |
| FST16040 | 40V | 28V | 40V |
| FST16045 | 45V | 31.5V | 45V |
| FST16060 | 60V | 42V | 60V |
| FST16080 | 80V | 56V | 80V |
| FST160100 | 100V | 70V | 100V |

POWERMOD

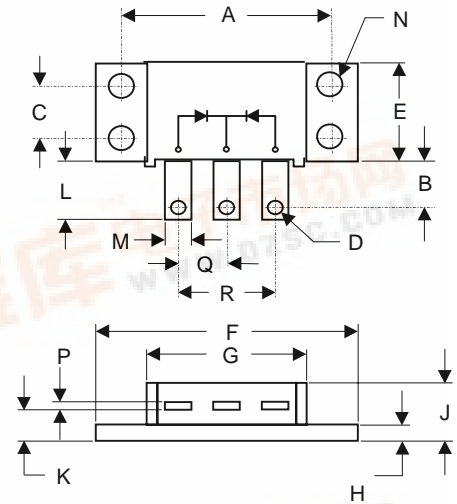

Electrical Characteristics @ 25°C Unless Otherwise Specified


| | | | |
|---|-------------|-------|--|
| Average Forward Current | $I_{F(AV)}$ | 160 A | $T_A = 115^\circ\text{C}$ |
| Peak Forward Surge Current | I_{FSM} | 1200A | 8.3ms, half sine |
| Maximum Instantaneous Forward Voltage | V_F | | $I_{FM} = 80.0\text{A};$ $T_A = 25^\circ\text{C}$ |
| FST16020-16045 | | .63 V | |
| FST16060 | | .75 V | |
| FST16080-160100 | | .84 V | |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | I_R | 2mA | $T_A = 25^\circ\text{C}$ |
| Typical Junction Capacitance | C_J | 400pF | Measured at 1.0MHz, $V_R=4.0\text{V}$ |

| DIM | INCH ES | | MM | | NOTE |
|-----|---------|-------|-------|-------|------|
| | MIN | MAX | MIN | MAX | |
| A | 1.995 | 2.005 | 50.67 | 50.93 | |
| B | .330 | .325 | 7.62 | 8.26 | |
| C | .495 | .505 | 12.57 | 12.83 | |
| D | .182 | .192 | 4.62 | 4.88 | |
| E | .990 | 1.010 | 25.12 | 26.65 | |
| F | 1.490 | 1.510 | 37.85 | 38.35 | |
| G | 1.500 | 1.525 | 38.10 | 38.70 | |
| H | .120 | .130 | 3.05 | 3.30 | |
| J | ----- | .400 | ----- | 10.16 | |
| K | .240 | .260 | 6.10 | 6.60 | |
| L | .490 | .510 | 12.45 | 12.95 | |
| M | .330 | .350 | 8.38 | 6.90 | |
| N | .175 | .195 | 4.45 | 4.95 | ∅ |
| P | .035 | .045 | 0.89 | 1.14 | |
| Q | .445 | .455 | 11.30 | 11.56 | |
| R | .890 | .910 | 22.61 | 23.11 | |

Pulse Test: Pulse Width 300μsec, Duty Cycle 1%




Figure 1
Typical Forward Characteristics

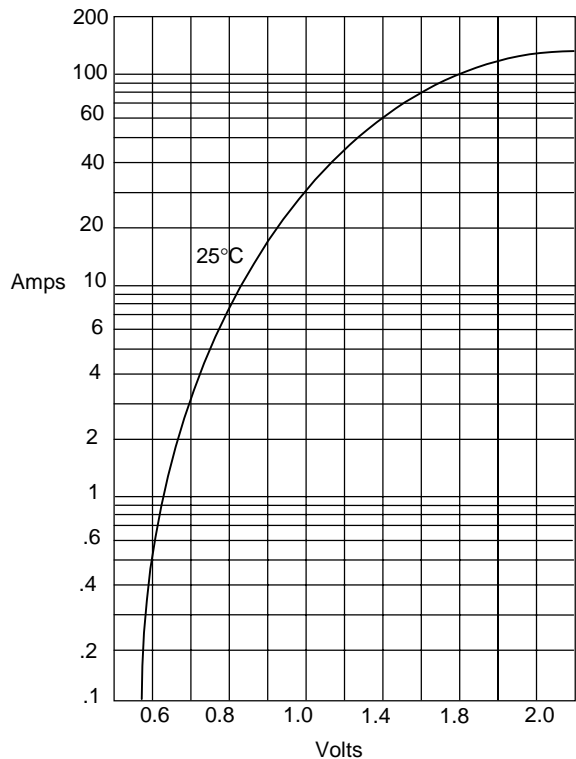


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

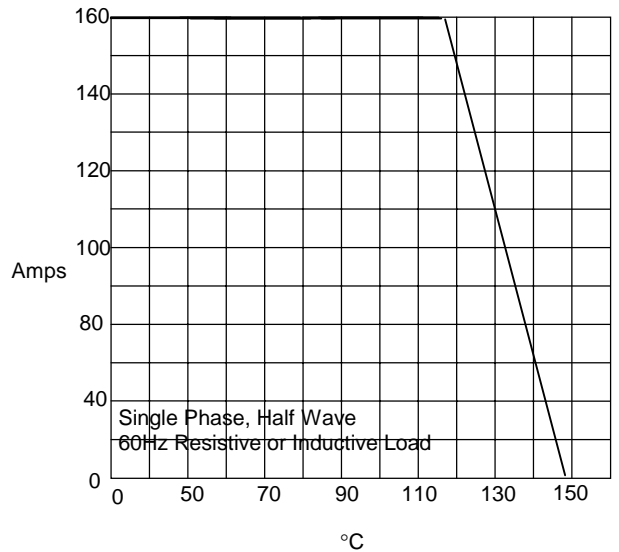

Average Forward Rectified Current - Amperes versus
Ambient Temperature - °C

Figure 3
Junction Capacitance

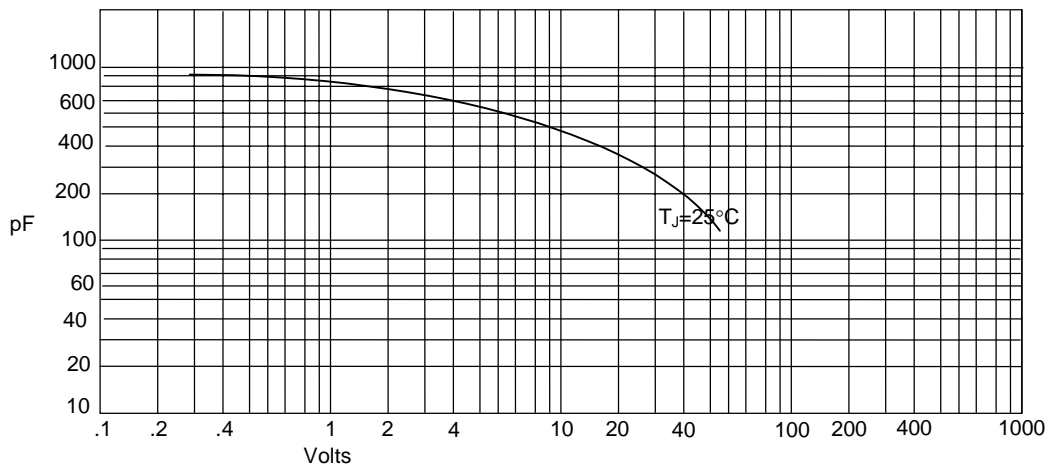

Junction Capacitance - pF versus
Reverse Voltage - Volts



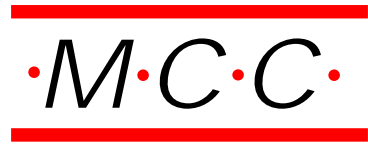


Figure 4
Typical Reverse Characteristics

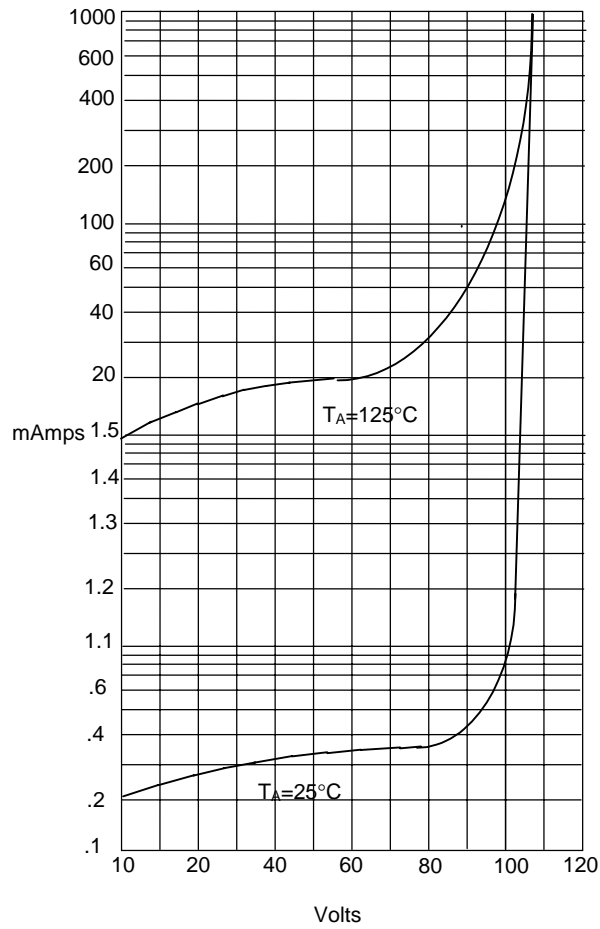

Instantaneous Reverse Leakage Current - MicroAmperes *versus*
Percent Of Rated Peak Reverse Voltage - Volts

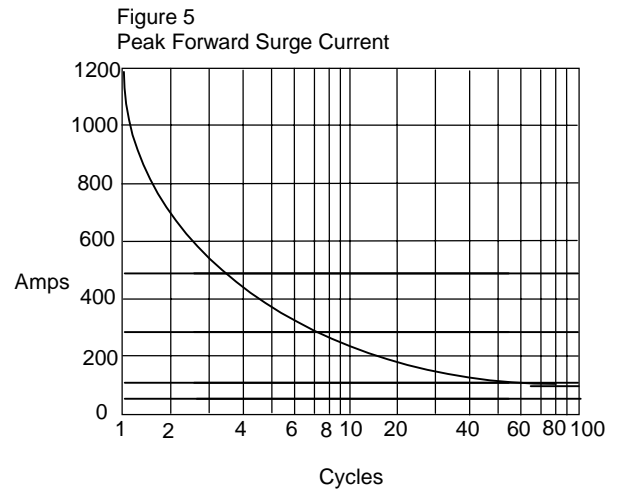

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles