



Global Mixed-mode Technology Inc.

G9205

5V 2A Low Dropout Regulator with Disable

Features

- Dropout voltage 0.5V @ $I_o = 2A$
- Output current in excess of 2A
- Output voltage accuracy $\pm 2.5\%$
- Quiescent current, typically 5mA
- Internal short circuit current limit
- Internal over temperature protection
- TO-220 4pin Full-Mold package
- ON/OFF control

General Description


The G9205 positive 5V voltage regulator features the ability to source 2A of output current. The dropout voltage is 0.5V at 2A output current. The typical quiescent current is 5mA. Furthermore, the quiescent current is smaller when the regulator is in the dropout mode ($V_{IN} < 5.5V$).

Familiar regulator features such as over temperature and over current protection circuits are provided to prevent it from being damaged by abnormal operating conditions. A V_{dis} pin is provided to disable the output when needed.

Ordering Information

ORDER NUMBER	ORDER NUMBER (Pb free)	MARKING	TEMP. RANGE	PACKAGE	PIN OPTION			
					1	2	3	4
G9205TF1T	G9205TF1Tf	G9205	-40°C to +85°C	TO-220F-4	V_{IN}	V_O	GND	V_{dis}
G9205TH1T	G9205TH1Tf	G9205	-40°C to +85°C	TO-220F-4	V_{IN}	V_O	GND	V_{dis}

Order Number Identification

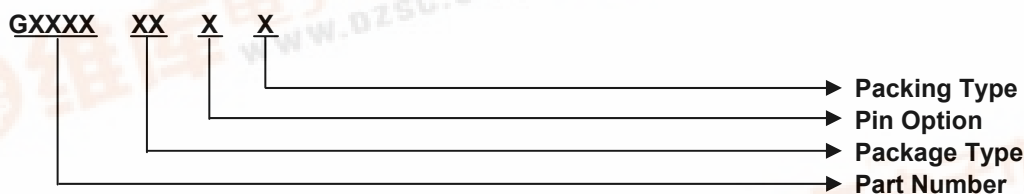

PACKAGE TYPE

TF: TO-220F-4 (short lead)
TH: TO-220F-4 (long lead)

PIN OPTION


1: V_{IN} 2: V_O 3: GND 4: V_{dis}

PACKING


T: Tube

Package Type

TO-220F-4



Typical Application

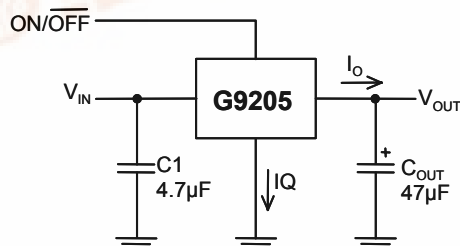

**Absolute Maximum Ratings**

(Note 1)

Input Voltage.....	8V
V _{dis} Voltage.....	8V
Power Dissipation Internally Limited.....	(Note 2)
Maximum Junction Temperature.....	150°C
Storage Temperature Range.....	-65°C ≤ T _J ≤ +150°C
Reflow Temperature (soldering, 10sec).....	260°C
Continuous Power Dissipation (T _A = +25°C)	
TO-220 No heatsink.....	1.5W
TO-220 with infinite heatsink.....	15W

Operating Conditions

(Note 1)

Input Voltage.....	5.5V~7V
Temperature Range.....	-40°C ≤ T _A ≤ 85°C

Electrical CharacteristicsV_{IN} = 7V, I_O = 0.5A, C_{IN} = 4.7μF, C_{OUT} = 47μF, T_A = T_J = 25°C unless otherwise specified (Note 3)

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Output Voltage		I _O = 0.5A	4.88	5	5.12	V
Line Regulation		5.5V ≤ V _{IN} ≤ 7V, I _O = 10mA	---	0.5	2	%
Load Regulation		50mA ≤ I _O ≤ 2A	---	0.5	2	%
Quiescent Current		V _{IN} = 5.5V	---	5	10	mA
Ripple Rejection		f _i = 120Hz, 1VP-P, I _O = 100mA	---	45	---	dB
Dropout Voltage		I _O = 2A	---	---	0.5	V
Short Circuit Current			---	3.8	---	A
Over Temperature			---	150	---	°C
Disable Voltage High	V _{disH}	Output Active	2.0	---	---	V
Disable Voltage Low	V _{disL}	Output Disabled	---	---	0.8	V
Disable Bias Current High	I _{disH}	V _{dis} = 2.7V	---	---	20	μA
Disable Bias Current Low	I _{disL}	V _{dis} = 0.4V	---	---	20	μA

Note 1: Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Conditions are conditions under which the device functions but the specifications might not be guaranteed. For guaranteed specifications and test conditions see the Electrical Characteristics.

Note2: The maximum power dissipation is a function of the maximum junction temperature, T_{Jmax}; total thermal resistance, θ_{JA}, and ambient temperature T_A. The maximum allowable power dissipation at any ambient temperature is T_{Jmax} - T_A / θ_{JA}. If this dissipation is exceeded, the die temperature will rise above 150°C and IC will go into thermal shutdown. For the TO-220 package, θ_{JA} is 60°C/W (No heat sink).

Note3: Low duty pulse techniques are used during test to maintain junction temperature as close to ambient as possible.

Note4: The type of output capacitor should be tantalum or aluminum.

Definitions**Dropout Voltage**

The input/output Voltage differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal value, dropout voltage is affected by junction temperature, load current and minimum input supply requirements.

Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

Load Regulation

The change in output voltage for a change in load current at constant chip temperature. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

Maximum Power Dissipation


The maximum total device dissipation for which the regulator will operate within specifications.

Quiescent Bias Current

Current which is used to operate the regulator chip and is not delivered to the load.



Block Diagram

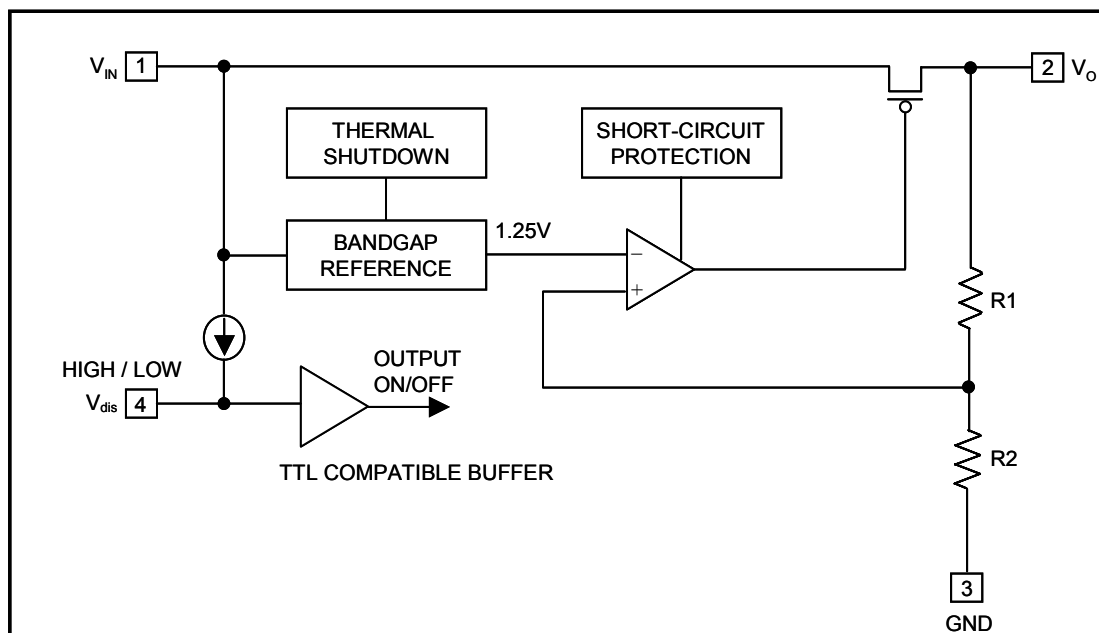





Typical Performance Characteristics

$V_{IN}=7V$, $C_{IN}=10\mu F$, $C_{OUT}=47\mu F$, $T_A=25^\circ C$, unless otherwise noted.


Line Transient Response

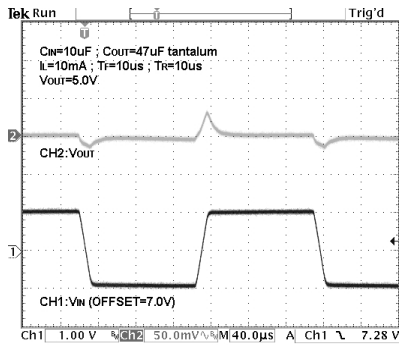


Load Transient Response

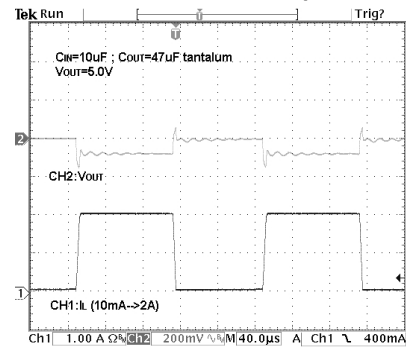


Short Circuit Current

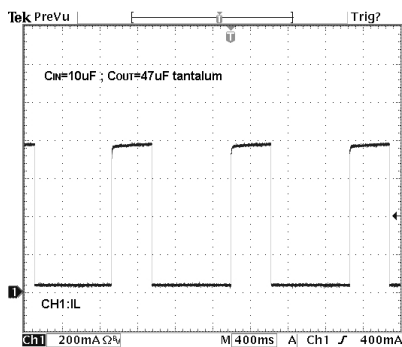


Ripple Rejection

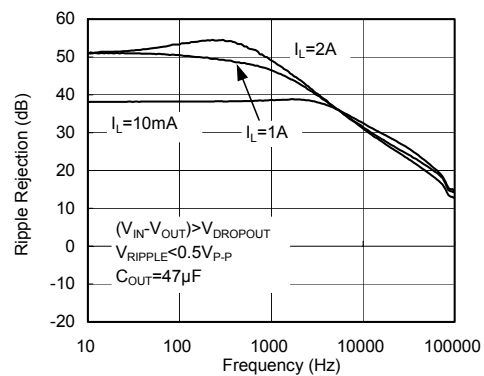

Overcurrent Protection Characteristics

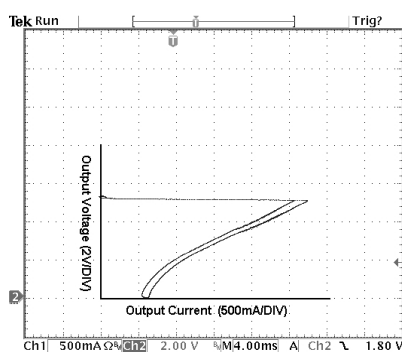


Start-up

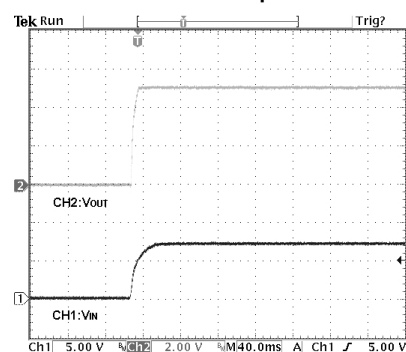




Typical Performance Characteristics (continued)


Quiescent Current vs. Temperature

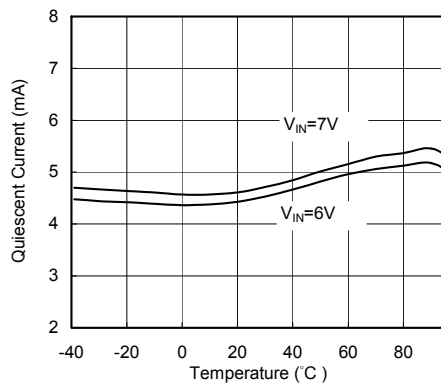


Line Regulation

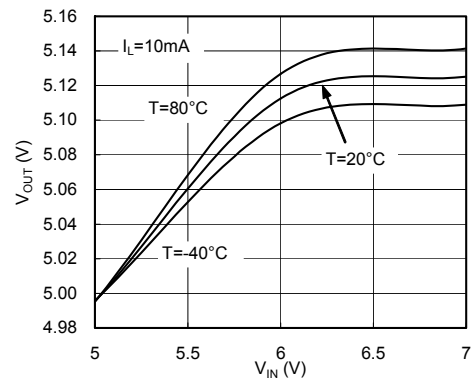


Dropout Voltage vs. Temperature

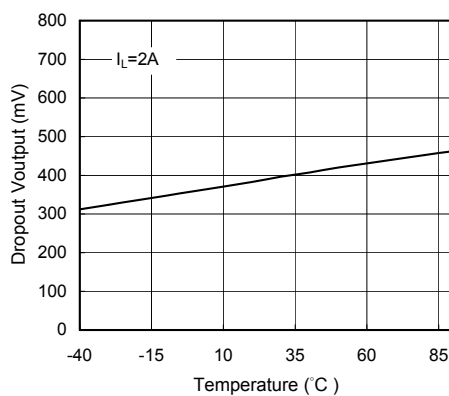


Output Voltage vs. Temperature

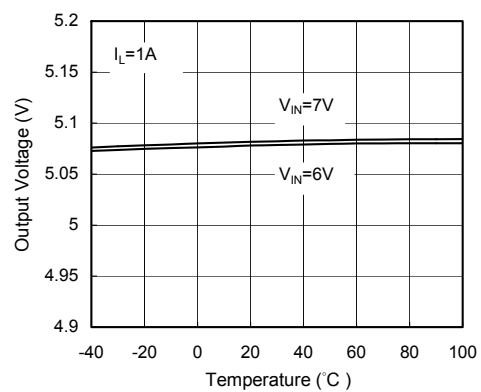

Power Dissipation vs. Temperature (T_A)

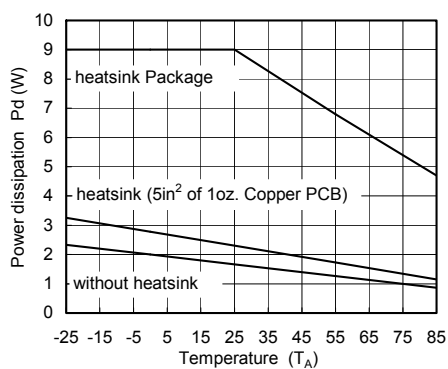


R_{th} vs. Time

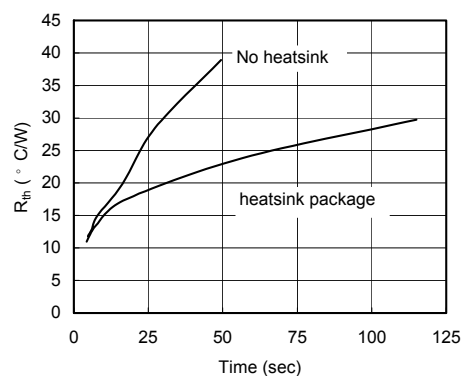




Heatsink Package Dimension

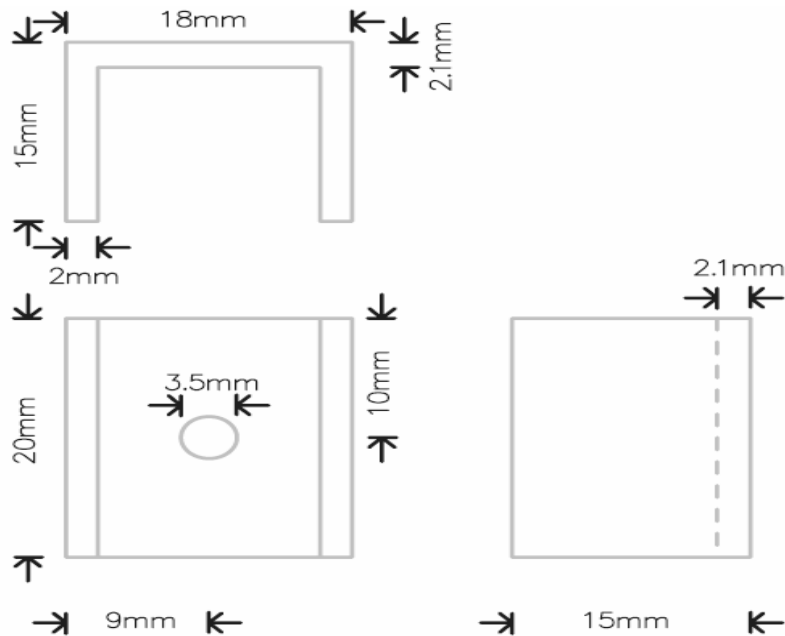




Package Information

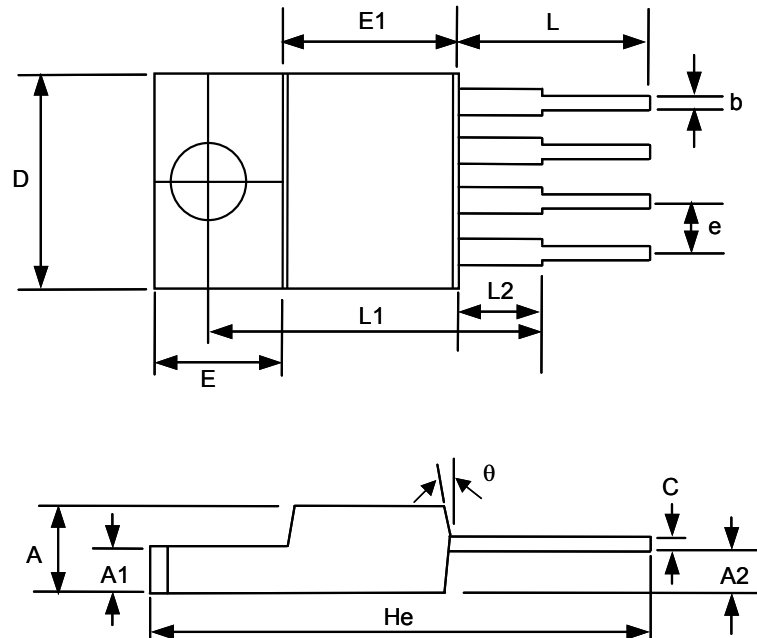

TO-220F-4 Package (short lead)

SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	4.42	4.57	4.72	0.174	0.180	0.186
A1	2.69	2.79	2.89	0.106	0.110	0.114
A2	1.68	1.78	1.88	0.066	0.070	0.074
D	10.00	10.10	10.20	0.394	0.398	0.402
E	6.85	6.95	7.05	0.269	0.273	0.278
E1	8.54	8.64	8.74	0.336	0.340	0.344
L	8.32	8.52	8.72	0.328	0.335	0.343
L1	16.56	16.66	16.76	0.652	0.656	0.660
L2	3.60	3.70	3.80	0.142	0.146	0.150
He	23.72	24.22	24.72	0.934	0.953	0.93
C	-----	0.48	-----	-----	0.019	-----
e	-----	2.54(TYP)	-----	-----	0.1(TYP)	-----
b	-----	0.635(TYP)	-----	-----	0.025(TYP)	-----
θ	4°	7°	11°	4°	7°	11°

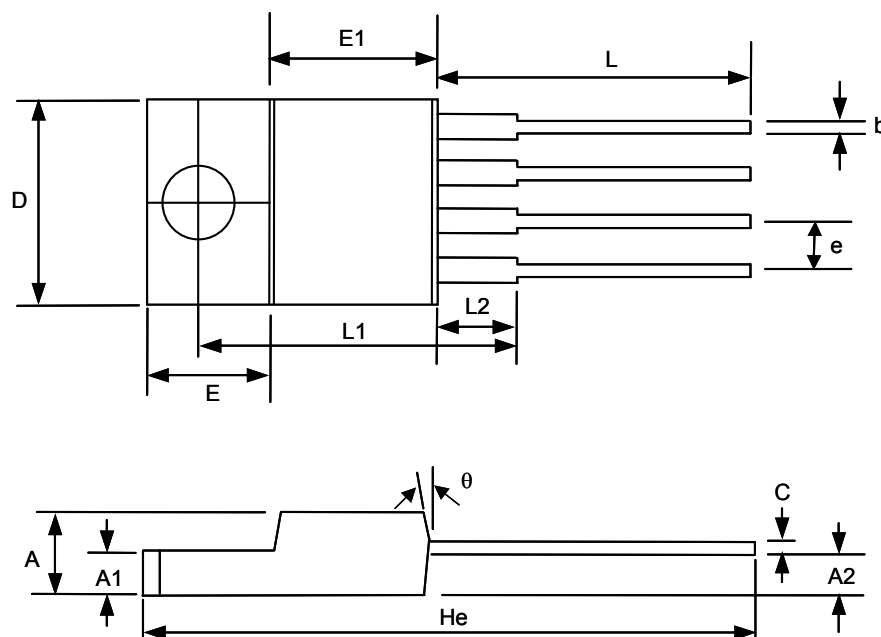

TO-220F-4 Package (long lead)

SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	4.42	4.57	4.72	0.174	0.180	0.186
A1	2.69	2.79	2.89	0.106	0.110	0.114
A2	1.68	1.78	1.88	0.066	0.070	0.074
D	10.00	10.10	10.20	0.394	0.398	0.402
E	6.85	6.95	7.05	0.269	0.273	0.278
E1	8.54	8.64	8.74	0.336	0.340	0.344
L	13.15	13.35	13.55	0.518	0.526	0.533
L1	16.56	16.66	16.76	0.652	0.656	0.660
L2	3.60	3.70	3.80	0.142	0.146	0.150
He	28.44	28.94	29.44	1.119	1.139	1.159
C	-----	0.48	-----	-----	0.019	-----
e	-----	2.54(TYP)	-----	-----	0.1(TYP)	-----
b	-----	0.635(TYP)	-----	-----	0.025(TYP)	-----
θ	4°	7°	11°	4°	7°	11°

Taping Specification

PACKAGE	Q'TY/BY TUBE
TO-220F-4	50 ea