



GBPC 40, 50 SERIES

High Current 40, 50 AMPS. Single Phase Glass Passivated Bridge Rectifiers




Voltage Range
50 to 1000 Volts
Current
40, 50.0 Amperes

Features

- ✧ UL Recognized File # E-96005
- ✧ Glass passivated junction
- ✧ The plastic material used carries Underwriters Laboratory Flammability Recognition 94V-0
- ✧ Integrally molded heatsink provide very low thermal resistance for maximum heat dissipation
- ✧ Universal 4-way terminals; snap-on, wrap-around, solder or P.C. board mounting
- ✧ Surge overload ratings 400 amperes
- ✧ Terminals solderable per MIL-STD-202, Method 208
- ✧ Typical I_R less than 0.2 μ A
- ✧ High temperature soldering guaranteed: 260°C / 10 seconds / .375", (9.5mm) lead lengths
- ✧ Isolated voltage from case to lead over 2500 volts

GBPC40

GBPC40-M

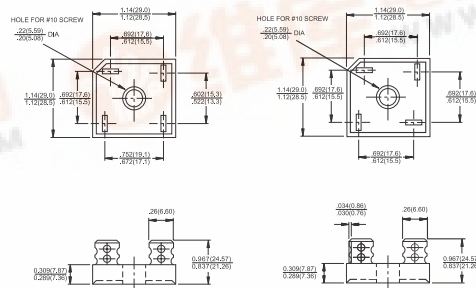

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	-005	-01	-02	-04	-06	-08	-10	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C = 55^\circ C$	$I_{(AV)}$					40.0			A
						50.0			
Peak Forward Surge Current, Single Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}					400			A
						400			
Maximum Instantaneous Forward Voltage Drop Per Element at Specified Current	V_F					1.1			V
Maximum DC Reverse Current at Rated DC Blocking Voltage Per Element	I_R					10			μ A
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$					1.5			$^{\circ}C/W$
Operating and Storage Temperature Range	T_J, T_{STG}					-50 to +150			$^{\circ}C$

Notes: 1. Thermal Resistance from Junction to Case.

2. Suffix "M" - Terminal Location Face to Face.





RATINGS AND CHARACTERISTIC CURVES (GBPC4005 THRU GBPC4010)
GBPC5005 GBPC5010

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

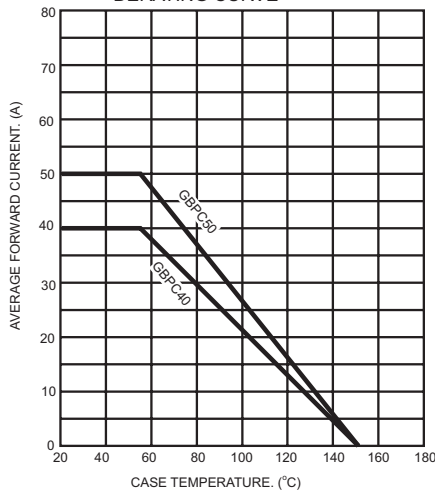


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

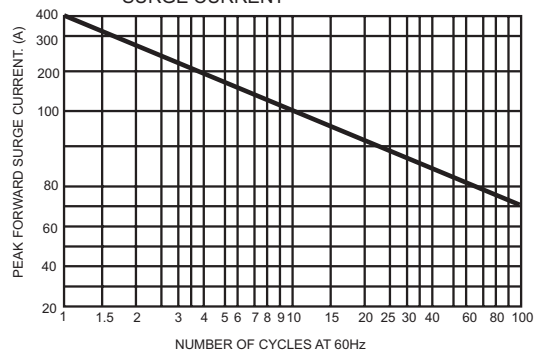


FIG. 3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

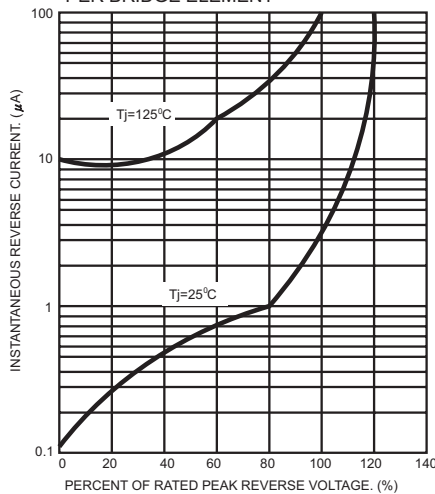


FIG. 4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

