





LESHAN RADIO COMPANY, LTD.

General Purpose Transistors

NPN Silicon



2SC2412K*LT1

CASE 318-07, STYLE 6
SOT-23 (TO-236AB)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	50	V
Collector-Base Voltage	V_{CBO}	60	V
Emitter-Base Voltage	V_{EBO}	7.0	V
Collector Current — Continuous	I_C	150	mA
Collector power dissipation	P_c	0.2	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 ~ +150	°C

DEVICE MARKING

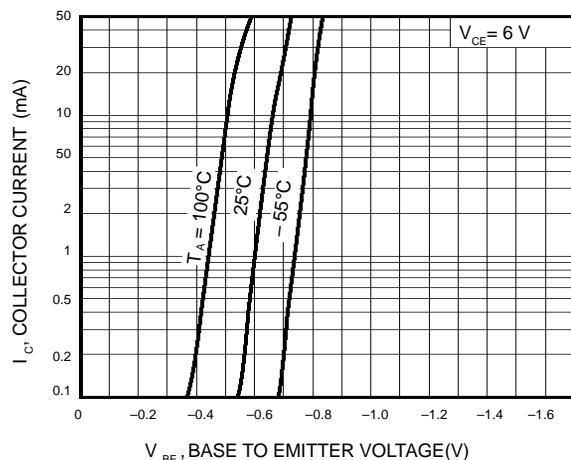
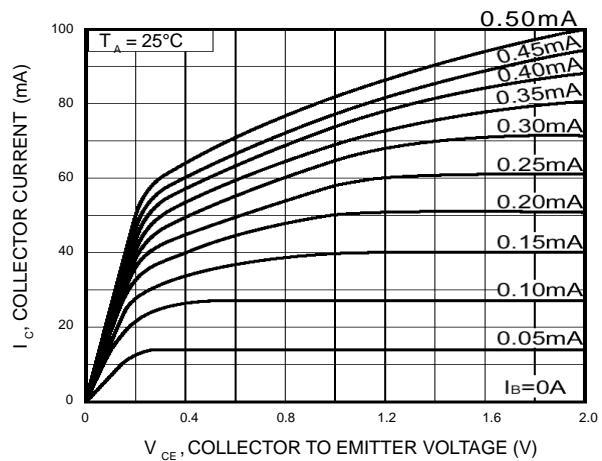
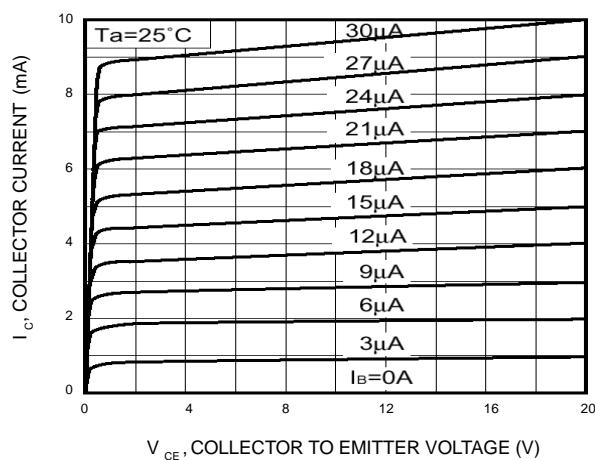
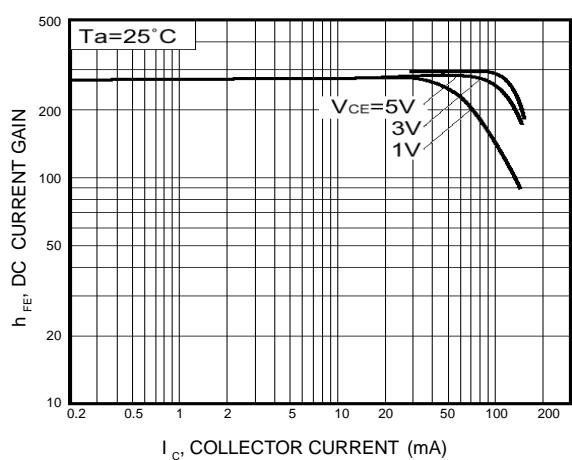
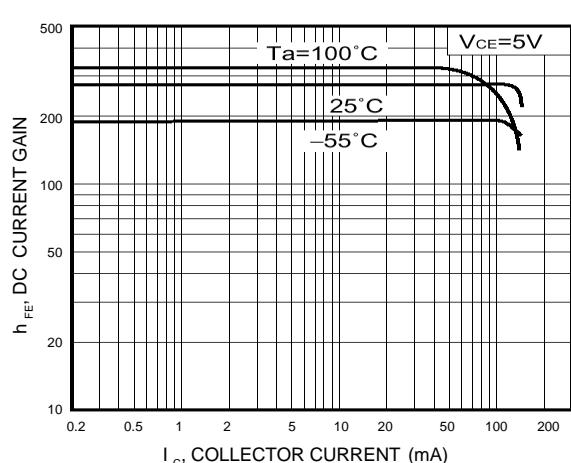
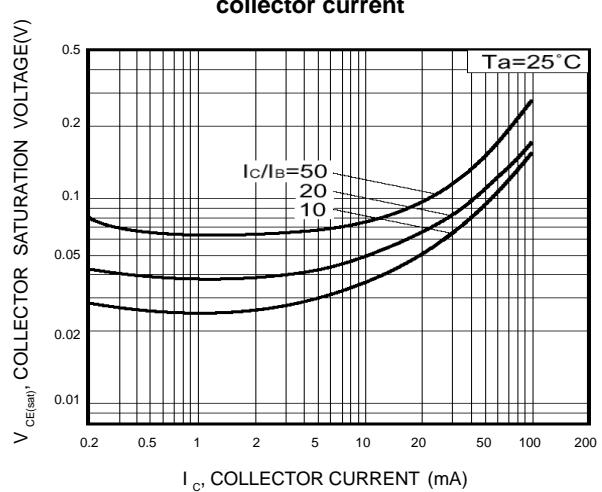
2SC2412K*LT1 =G1F

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
Collector-Emitter Breakdown Voltage ($I_C = 1 \text{ mA}$)	$V_{(BR)CEO}$	50	—	—	V
Emitter-Base Breakdown Voltage ($I_E = 50 \mu\text{A}$)	$V_{(BR)EBO}$	7	—	—	V
Collector-Base Breakdown Voltage ($I_C = 50 \mu\text{A}$)	$V_{(BR)CBO}$	60	—	—	V
Collector Cutoff Current ($V_{CB} = 60 \text{ V}$)	I_{CBO}	—	—	0.1	μA
Emitter cutoff current ($V_{EB} = 7 \text{ V}$)	I_{EBO}	—	—	0.1	μA
Collector-emitter saturation voltage ($I_C / I_B = 50 \text{ mA} / 5 \text{ mA}$)	$V_{CE(sat)}$	—	—	0.4	V
DC current transfer ratio ($V_{CE} = 6 \text{ V}, I_C = 1 \text{ mA}$)	h_{FE}	120	—	560	—
Transition frequency ($V_{CE} = 12 \text{ V}, I_E = -2 \text{ mA}, f = 30 \text{ MHz}$)	f_T	—	180	—	MHz
Output capacitance ($V_{CB} = 12 \text{ V}, I_E = 0 \text{ A}, f = 1 \text{ MHz}$)	C_{ob}	—	2.0	3.5	pF

 h_{FE} values are classified as follows:

PDF *	Q	R	S
h_{FE}	120~270	180~390	270~560

2SC2412K*LT1
Fig.1 Grounded emitter propagation characteristics

Fig.2 Grounded emitter output characteristics(I)

Fig.3 Grounded emitter output characteristics(II)

Fig.4 DC current gain vs. collector current (I)

Fig.5 DC current gain vs. collector current (II)

Fig.6 Collector-emitter saturation voltage vs. collector current


2S2412K*LT1

Fig.7 Collector-emitter saturation voltage vs. collector current (I)

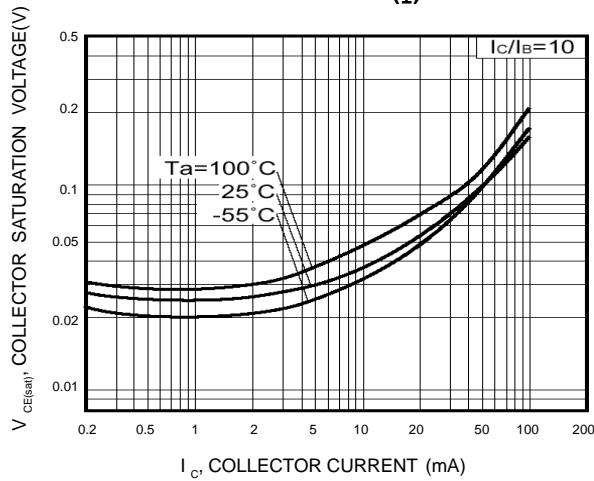


Fig.8 Collector-emitter saturation voltage vs. collector current (II)

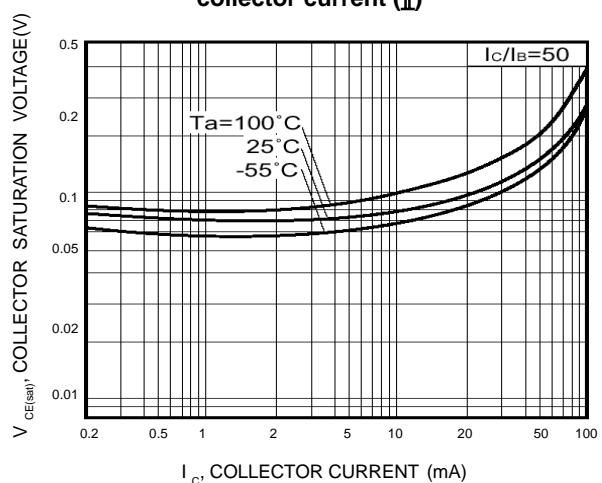
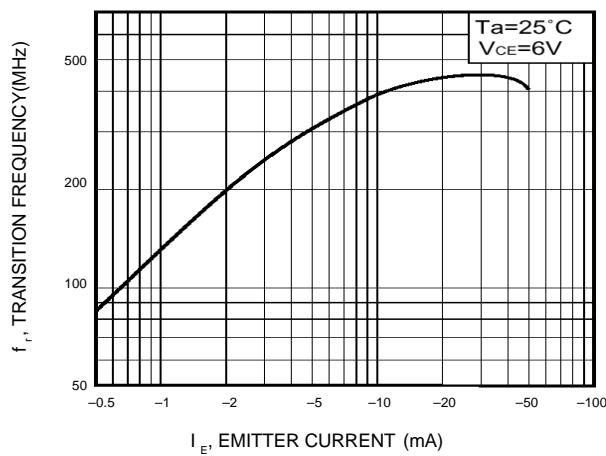


Fig.9 Gain bandwidth product vs. emitter current



**Fig.10 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage**

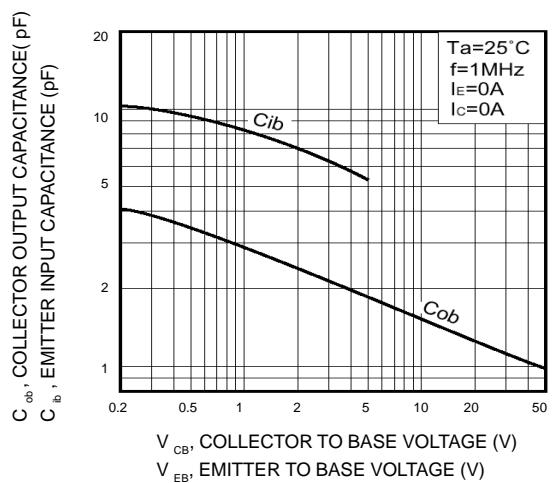


Fig.11 Base-collector time constant vs. emitter current

