


SHINDENGEN

TSS KP Series

SMD

KP15N14

OUTLINE DIMENSIONS

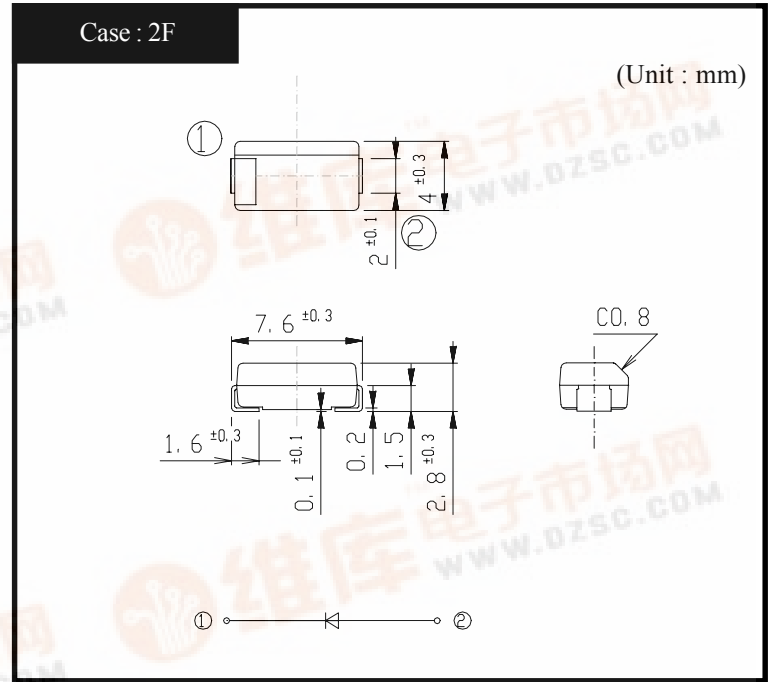

RATINGS

● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~125	°C
Junction Temperature	T _j		125	°C
Maximum Off-State Voltage	V _{DRM}		120	V
Surge On-State Current	I _{TSM}	10/1000 μs, Non-repetitive	150	A
		10/200 μs, Non-repetitive	200	
		8/20 μs, Non-repetitive	300	

● Electrical Characteristics (T_I=25°C)


Item	Symbol	Conditions	Ratings	Unit
Breakover Voltage	V _{BO}	Pulse measurement (Peak hold)	Min 130	V
Off-State Current	I _{DRM}	V _D = V _{DRM}	Max 10	μA
Holding Current	I _H	Pulse measurement	Min 100	mA
On-State Voltage	V _T	I _T = 2A	TYP 1.45	V
Junction Capacitance	C _j	f = 1kHz OSC = 1V, V _D = 50V	Max 200	pF
Clamping Voltage	V _{CL}	dv/dt = 100V/μs	Max 195	V



KP15N14 Off Current - Junction Temperature

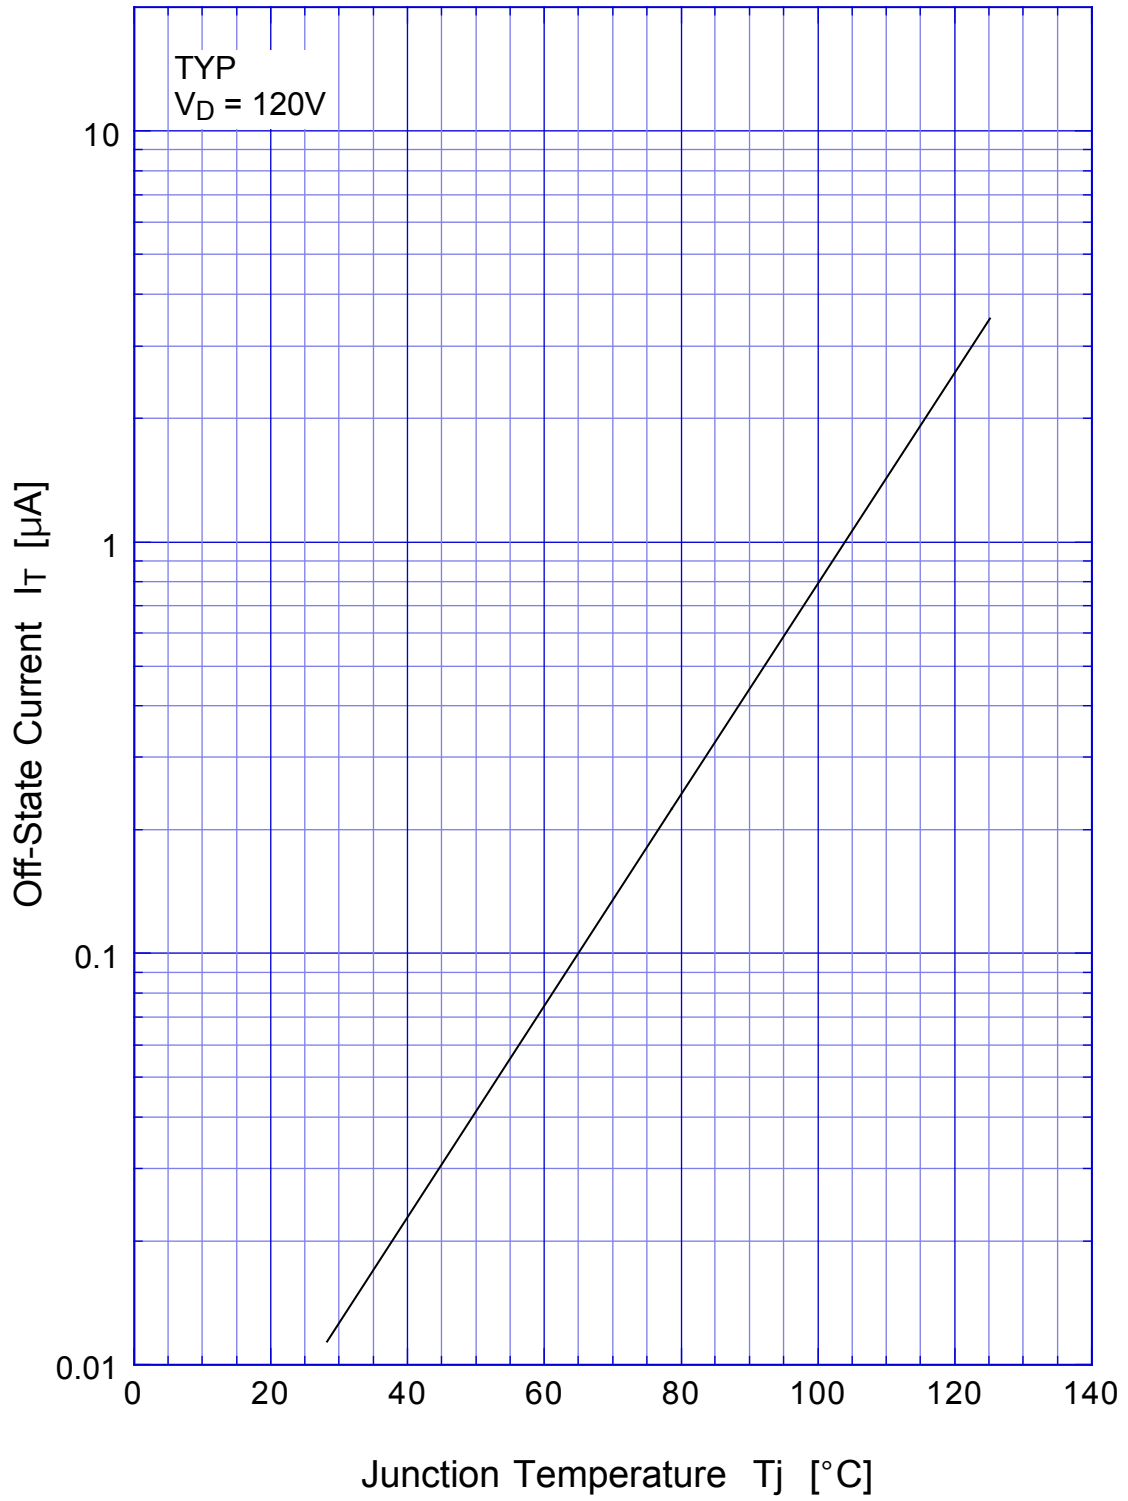

KP15N14 Holding Current - Junction Temperature

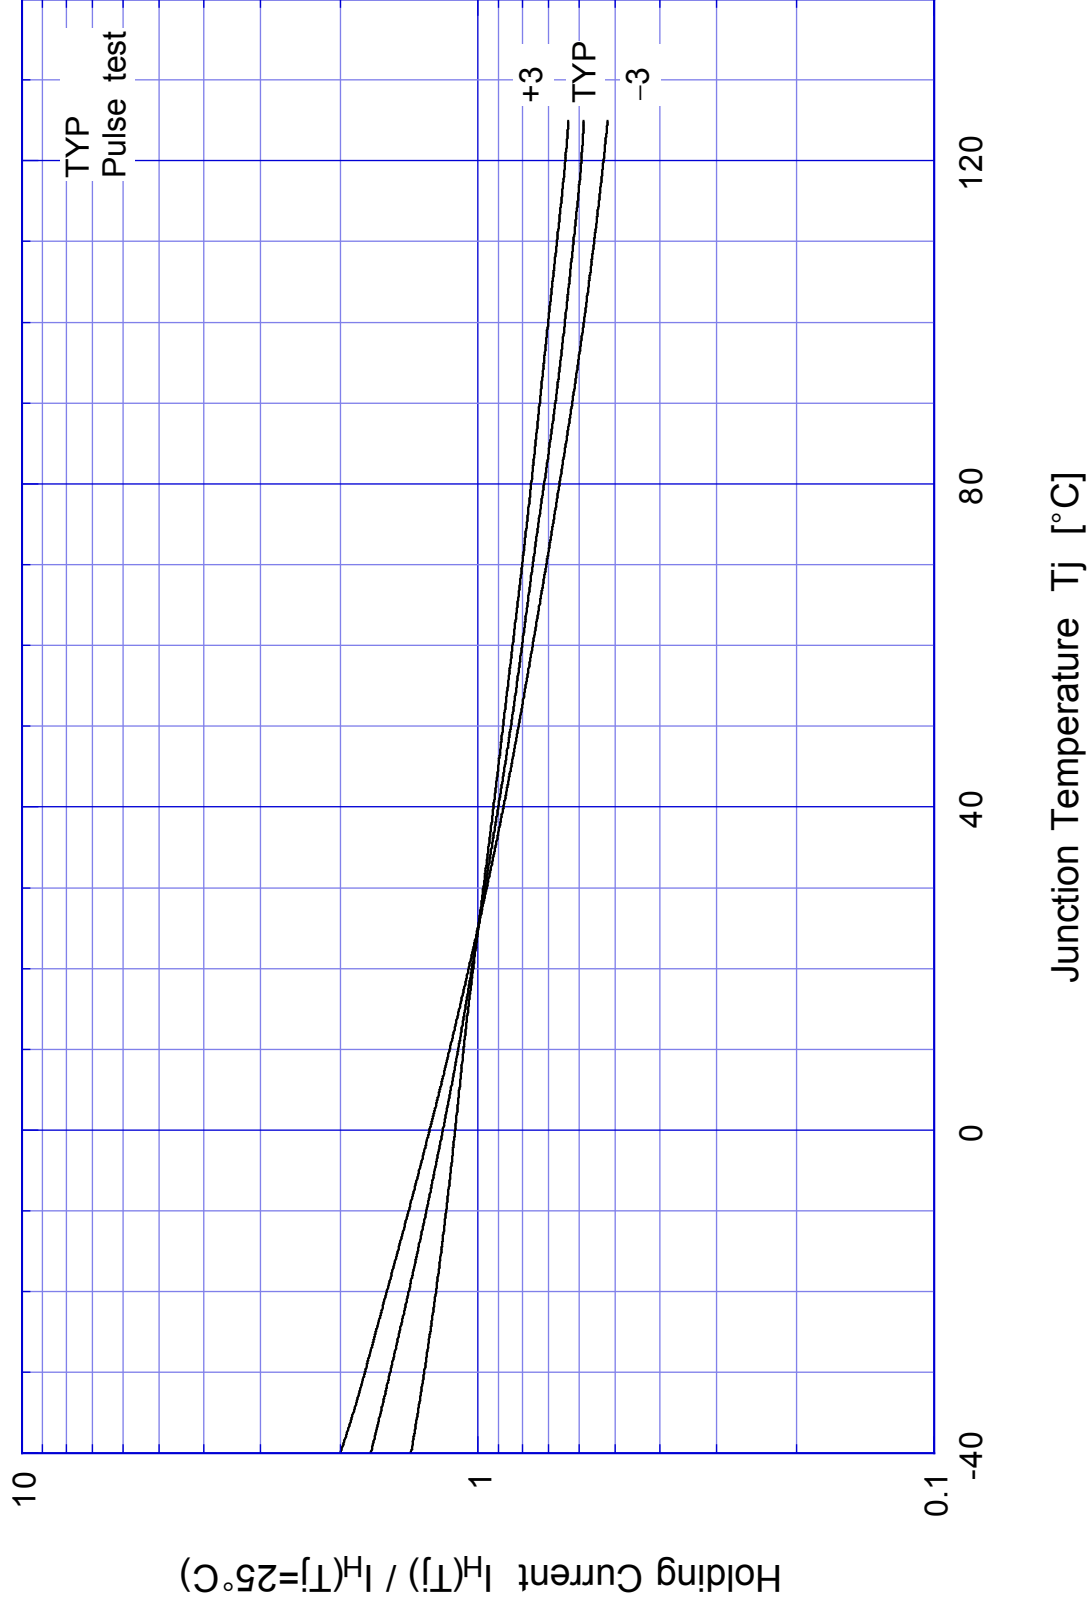

KP15N14 Breakover Voltage - Junction Temperature

