


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.



FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

EQUIVALENT CIRCUIT



EQUIVALENT CIRCUIT (TOP VIEW)

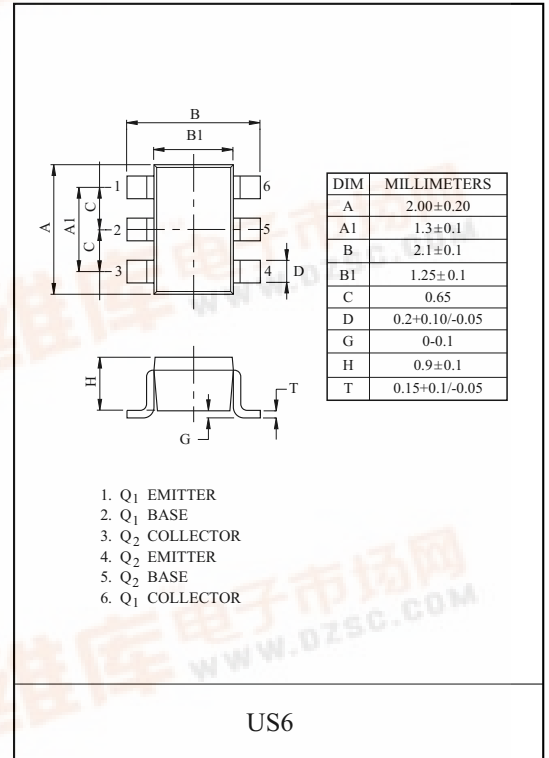

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-100	mA

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector Power Dissipation	P_C^*	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

* Total Rating.

ELECTRICAL CHARACTERISTICS (Ta=25°C)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=-50V, I_E=0$	-	-	-100	nA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=-5V, I_C=0$	-	-	-100	nA
DC Current Gain		h_{FE}	$V_{CE}=-5V, I_C=-1mA$	120	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=-10mA, I_B=-0.5mA$	-	-0.1	-0.3	V
Transition Frequency		f_T^*	$V_{CE}=-10V, I_C=-5mA$	-	250	-	MHz
Input Resistor	KRA760U	R_1		-	4.7	-	kΩ
	KRA761U			-	10	-	
	KRA762U			-	100	-	
	KRA763U			-	22	-	
	KRA764U			-	47	-	

MARK SPEC

TYPE	KRA760U	KRA761U	KRA762U	KRA763U	KRA764U
MARK	PK	PM	PN	PO	PP

Marking

Type Name









KRA760U~KRA764U

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRA760U	t_r	$V_O=-5V$ $V_{IN}=-5V$ $R_L=1k\ \Omega$	-	0.2	-	μS
		KRA761U			-	0.065	-	
		KRA762U			-	0.4	-	
		KRA763U			-	0.1	-	
		KRA764U			-	0.15	-	
	Storage Time	KRA760U	t_{stg}		-	2.0	-	
		KRA761U			-	1.7	-	
		KRA762U			-	3.0	-	
		KRA763U			-	2.0	-	
		KRA764U			-	1.5	-	
	Fall Time	KRA760U	t_f		-	0.3	-	
		KRA761U			-	0.3	-	
		KRA762U			-	1.7	-	
		KRA763U			-	0.8	-	
		KRA764U			-	1.5	-	

KRA760U~KRA764U

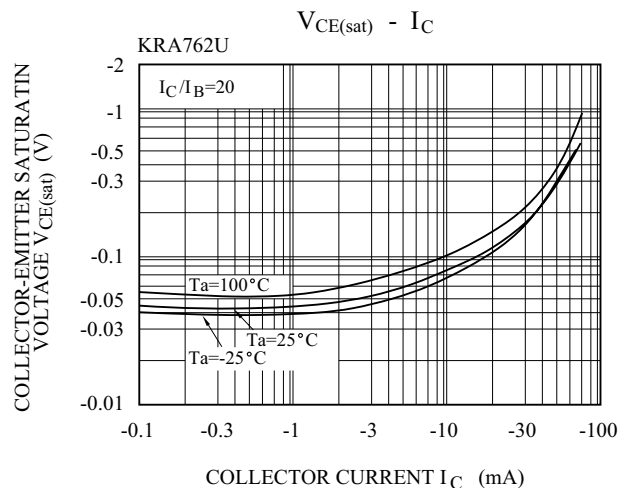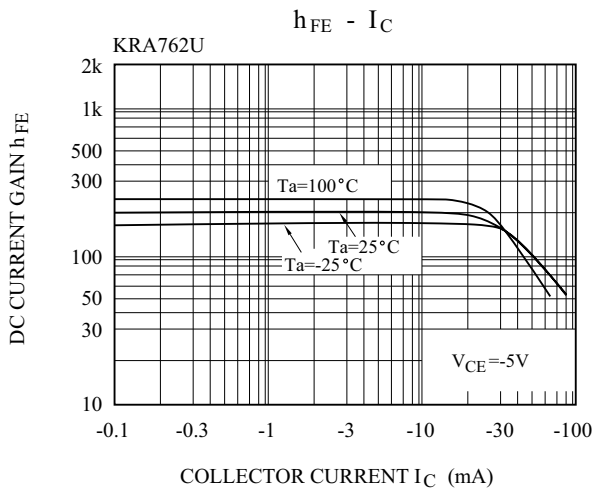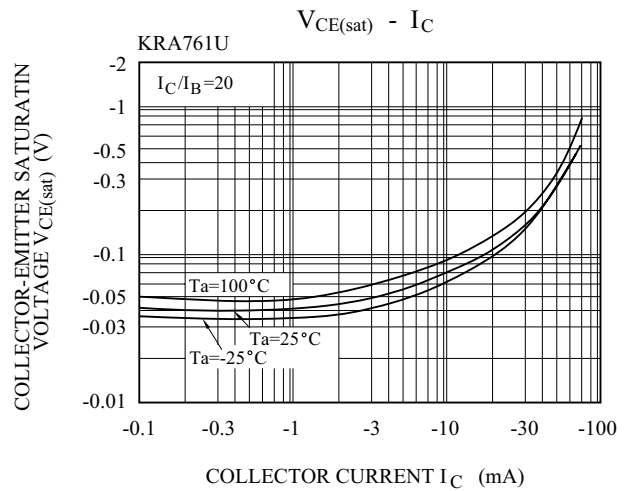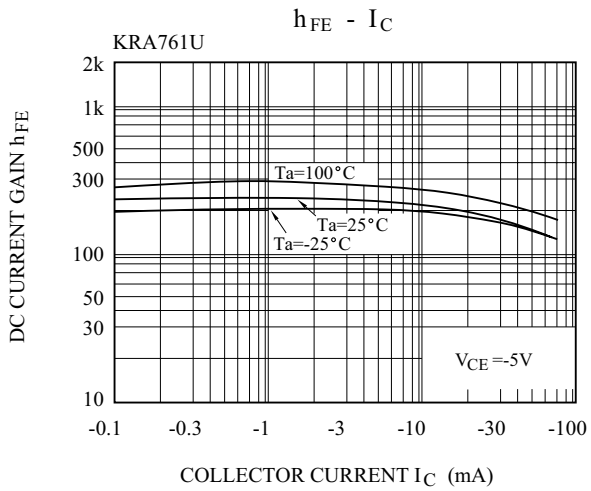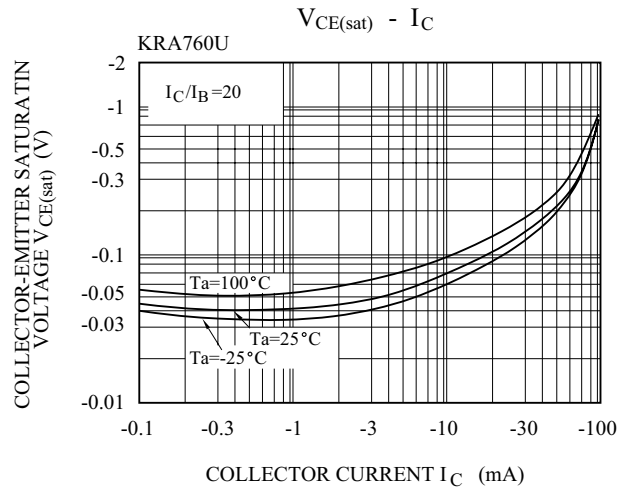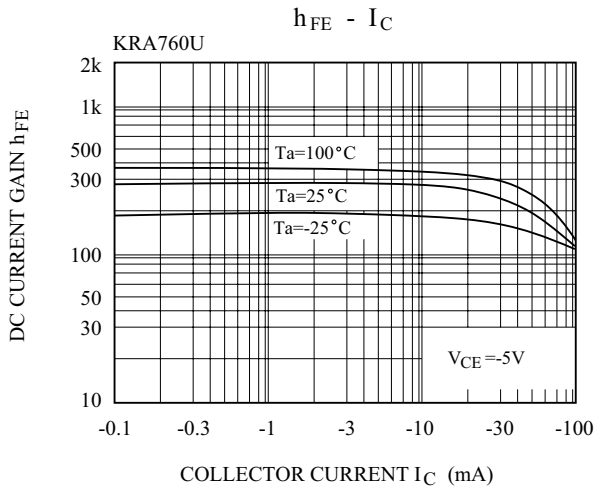

KRA760U~KRA764U

