

KEC

SEMICONDUCTOR
TECHNICAL DATA

SMAB34

SCHOTTKY BARRIER TYPE DIODE

SWITCHING TYPE POWER SUPPLY APPLICATIONS.

FEATURES


- Low Profile Surface Mount Package.
- Low Power Loss, High Efficiency.
- For Use in Low Voltage, High Frequency inverters, Free Wheeling, and Polarity Protection Applications.

APPLICATION


- Switching Power Supply.
- DC/DC Converter.
- Home Appliances, Office Equipment.
- Telecommunication.

MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Average Output Rectified Current	I_O	3	A
Peak One Cycle Surge Forward Current (Non-Repetitive 60Hz)	I_{FSM}	70	A
Junction Temperature	T_j	-40 ~ 125	℃
Storage Temperature Range	T_{stg}	-40 ~ 125	℃

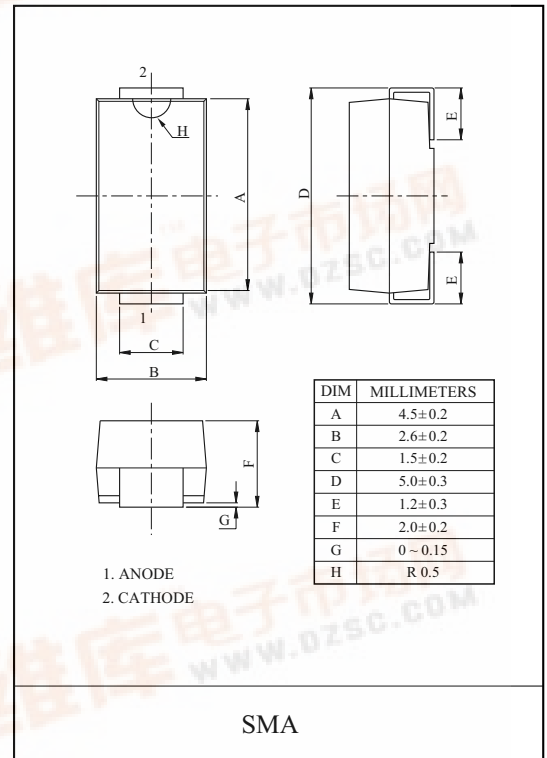

Marking



ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage	V_{FM}	$I_{FM}=3.0A$	-	-	0.52	V
Repetitive Peak Reverse Current	I_{RRM}	V_{RRM} =Rated	-	-	2.0	mA
Thermal Resistance	$R_{th(j-l)}$	Junction to lead	-	-	23	℃/W
	$R_{th(j-a)}$	Junction to ambient (on alumina substrate)	-	-	108	

SMAB34

