

# Agilent MGA-565P8 20 dBm $P_{sat}$ High Isolation Buffer Amplifier

## Data Sheet

### Description

The MGA-565P8 is designed for use in LO chains to drive high dynamic range passive mixers. It provides high isolation, high gain, and consistent output power. It is a GaAs MMIC, fabricated using Agilent Technologies' cost effective, reliable enhancement mode PHEMT (Pseudomorphic High Electron Mobility Transistor)<sup>[1]</sup> process. This device is housed in the LPCC 2x2 mm package. This package offers good thermal dissipation and RF characteristics.

MGA-565P8 features a saturated power of 20 dBm (with 0 dBm input power) and reverse isolation in excess of 40 dB at 2 GHz. The saturated output power can be set between 9 dBm and 20 dBm using an external resistor, with a corresponding adjustment in current consumption.


### Notes:

1. Enhancement mode technology employs a single positive  $V_{gs}$ , eliminating the need of negative gate voltage associated with conventional depletion mode devices.
2. Conform to JEDEC reference outline MO229 for DRP-N

### Pin Connections and Package Marking



Bottom View



Top View


### Note:

Package marking provides orientation and identification

"1B" = Device Code

"x" = Data code indicates the month of manufacture.

### Simplified Schematic

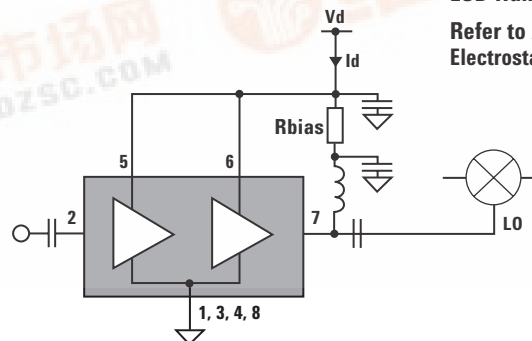

### Features

- Up to 3.5 GHz operating frequency
- 2:1 VSWR input and output at 2GHz
- Small package size: 2.0 x 2.0 x 0.75 mm LPCC<sup>[3]</sup>
- MSL-1 and lead-free
- Tape-and-reel packaging option available

### Specifications

@ 2 GHz,  $V_d = 5V$ ,  $P_{in} = 0$  dBm

- $P_{sat} = 20$  dBm
- $I_{dsat} = 67$  mA
- Isolation = 42 dB
- Small Signal Gain = 22 dB

### Applications

- VCO buffer amplifier for Cellular/PCS or other wireless infrastructures



**Attention:**  
Observe precautions for handling electrostatic sensitive devices.

ESD Machine Model (Class A)

ESD Human Body Model (Class 0)

Refer to Agilent Application Note A004R: Electrostatic Discharge Damage and Control.



### MGA-565P8 Absolute Maximum Ratings<sup>[1]</sup>

Symbol	Parameter	Units	Absolute Maximum
$V_d$	DC Supply Voltage	V	8
$P_{diss}$	Total Power Dissipation <sup>[2]</sup>	mW	448
$P_{in\ max.}$	RF Input Power ( $V_d=5V$ )	dBm	15
$T_{CH}$	Channel Temperature	°C	150
$T_{STG}$	Storage Temperature	°C	-65 to 150
$\theta_{ch\_b}$	Thermal Resistance <sup>[3]</sup>	°C/W	91
	ESD (Human Body Model)	V	100
	ESD (Machine Model)	V	30

**Notes:**

1. Operation of this device in excess of any one of these parameters may cause permanent damage.
2. Board (package belly) temperature  $T_B$  is 25°C. Derate 11 mW/°C for  $T_B > 109^\circ\text{C}$ .
3. Channel-to-board thermal resistance measured using 150°C Liquid Crystal Measurement method.

### Electrical Specifications

$T_A = 25^\circ\text{C}$ , Frequency = 2 GHz,  $R_{bias} = 0\Omega$  (unless specified otherwise)

Symbol	Parameter and Test Condition	Units	Min.	Typ.	Max.	
$P_{sat}$	Saturated Power at 0 dBm input	$V_d = 5V^{[1]}$	dBm	18.5	20	20.6
		$V_d = 3V$	dBm		17	
$I_{dsat}$	Saturation Current	$V_d = 5V^{[1]}$	mA	58	67	78
		$V_d = 3V$	mA		45	
ISL <sup>[1]</sup>	Reverse Isolation	dB	42	50		
Gain	Small Signal Gain	$V_d = 5V^{[1]}$	dB	20	21.8	23.5
		$V_d = 3V$	dB		20	
$I_{ds}$	Small Signal Current ( $P_{in} = -10\ \text{dBm}$ )	$V_d = 5V^{[1]}$	mA	33	37	43
		$V_d = 3V$	dB		27	
RL <sup>[1]</sup>	Return Loss	Input	dB		-8	
		Output	dB		-10	

**Notes:**

1. Typical value determined from a sample size of 500 parts from 3 wafers.
2. Measurement obtained using production test board described in the block diagram below. Circuit losses have been de-embedded from actual measurements.



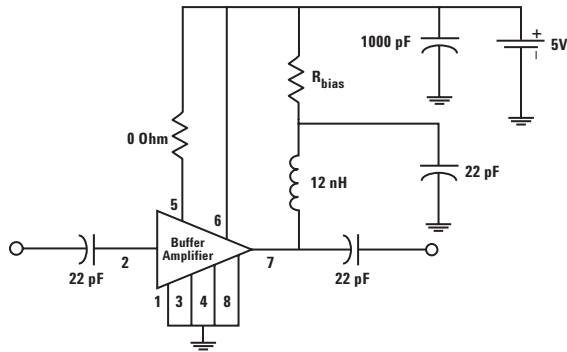


Figure 1. Production Test Circuit Schematic at 2 GHz..


**Product Consistency Distribution Charts at 2 GHz<sup>[1, 2]</sup>**

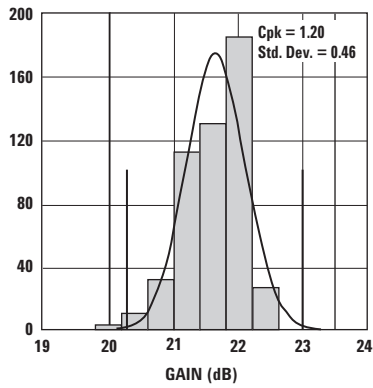


**Figure 2. Gain Distribution.**  
LSL = 20.0 dB, USL = 23.5 dB.

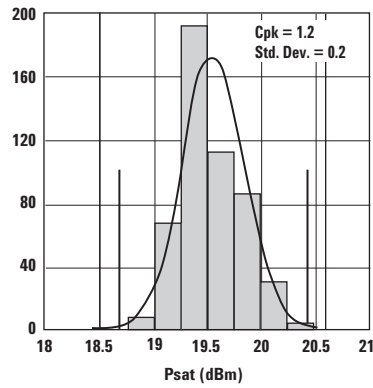

**Figure 3. Psat Distribution.**  
LSL = 18.5 dBm, USL = 20.6

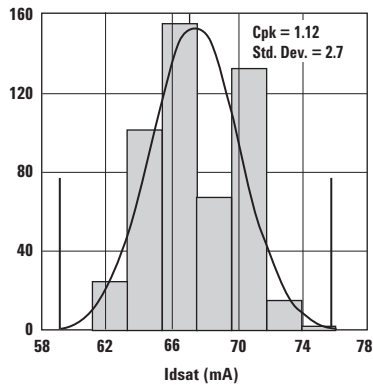

**Figure 4. Idsat Distribution.**  
LSL = 58.0 dBm, USL = 78.0 dBm.

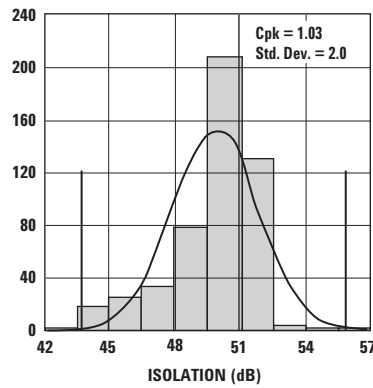

**Figure 5. Isolation Distribution.**  
LSL = 42.0 dB, USL = 56.0 dB.

**Notes:**

1. Statistical distribution determined from a sample size of 500 parts from 3 wafers.
2. Future wafers allocated to this product may have typical values anywhere between the minimum and maximum specification limits.

**MGA-565P8 Typical Performance Curves** (at 25°C, 2 GHz,  $R_{bias} = 0\Omega$ , unless specified otherwise)

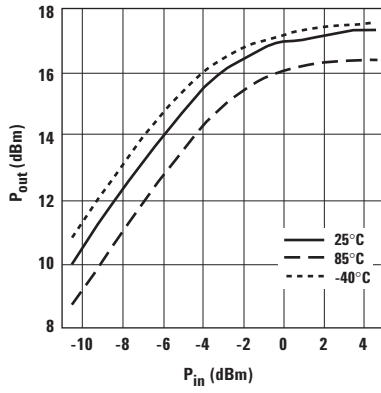


Figure 6.  $P_{out}$  vs.  $P_{in}$ ,  $V_d = 3V$ .

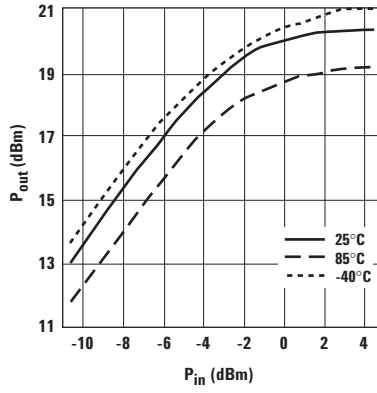


Figure 7.  $P_{out}$  vs.  $P_{in}$ ,  $V_d = 5V$ .

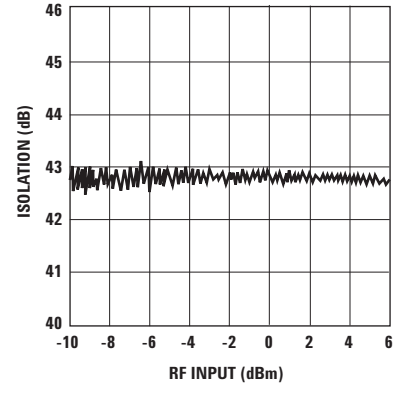


Figure 8. Isolation vs  $P_{in}$ ,  $V_d = 3V$ .



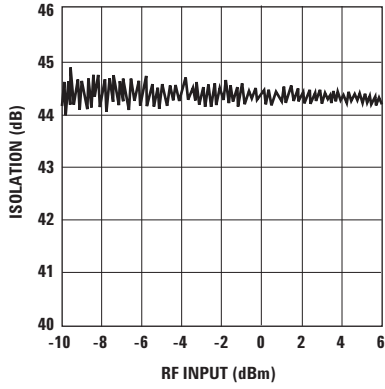


Figure 9. Isolation vs.  $P_{in}$ ,  $V_d = 5V$ .


**MGA-565P8 Typical Performance Curves ( $R_{bias} = 0\Omega$ , temperature variation)**

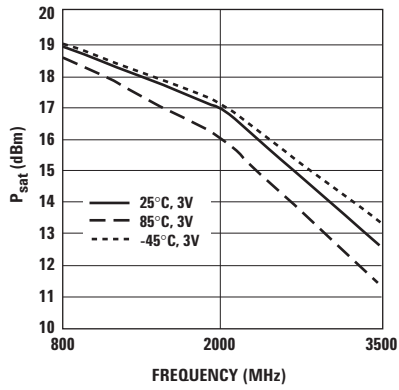


**Figure 10.  $P_{sat}$  vs. Frequency.**  
( $P_{in} = 0$  dBm,  $V_d = 3V$ )

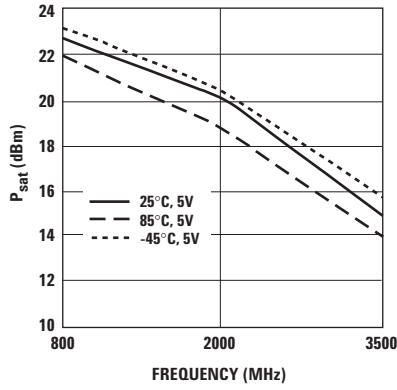


**Figure 11.  $P_{sat}$  vs. Frequency.**  
( $P_{in} = 0$  dBm,  $V_d = 5V$ )

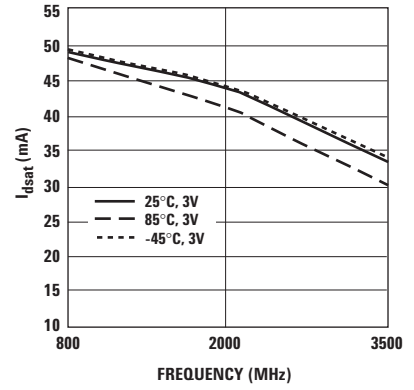


**Figure 12.  $I_{dsat}$  vs. Frequency.**  
( $P_{in} = 0$  dBm,  $V_d = 3V$ )

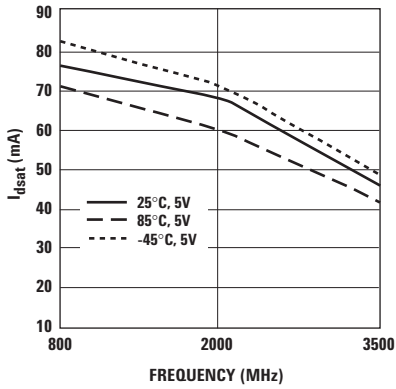

**Figure 13.  $I_{dsat}$  vs. Frequency.**  
( $P_{in} = 0$  dBm,  $V_d = 5V$ )

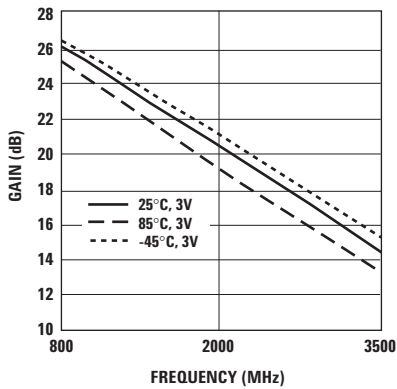

**Figure 14. Gain vs. Frequency.**  
( $P_{in} = -10$  dBm,  $V_d = 3V$ )

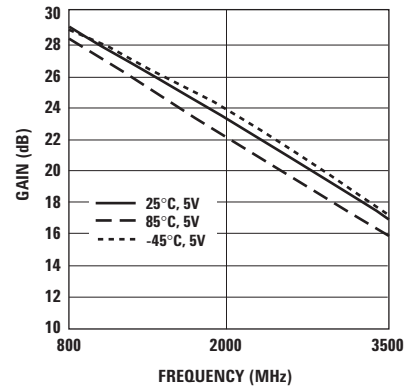

**Figure 15. Gain vs. Frequency.**  
( $P_{in} = -10$  dBm,  $V_d = 5V$ )

MGA-565P8 Typical Performance Curves ( $R_{bias} = 0\Omega$ , temperature variation), continued

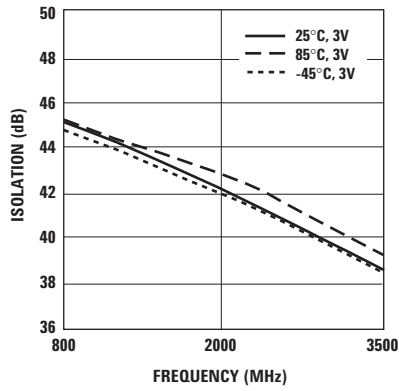


Figure 16. Isolation vs. Frequency. ( $P_{in} = -10$  dBm,  $V_d = 3$  V)

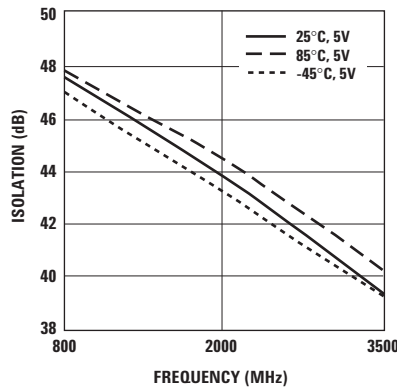


Figure 17. Isolation vs. Frequency. ( $P_{in} = -10$  dBm,  $V_d = 5$  V)

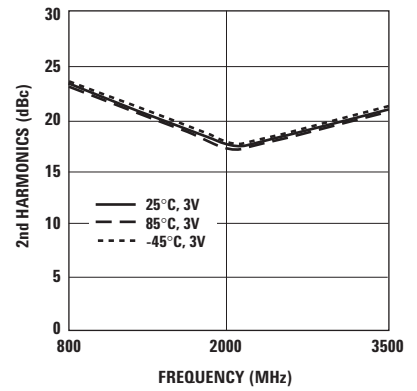


Figure 18. Second Harmonics vs. Frequency. ( $P_{in} = 0$  dBm,  $V_d = 3$  V)

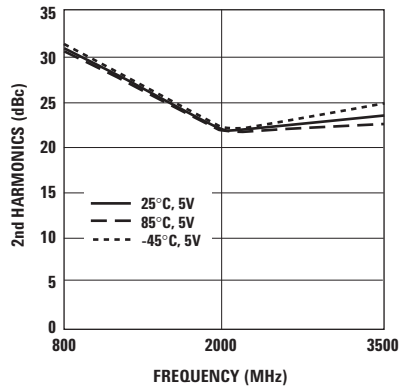


Figure 19. Second Harmonics vs. Frequency. ( $P_{in} = 0$  dBm,  $V_d = 5$  V)

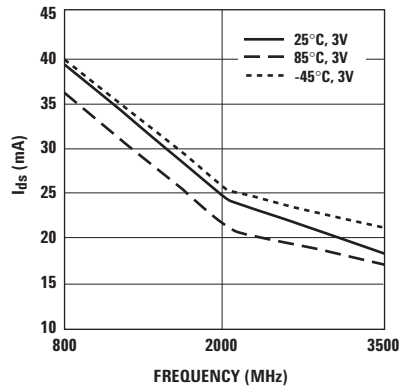


Figure 20.  $I_{ds}$  vs. Frequency. ( $P_{in} = -10$  dBm,  $V_d = 3$  V)



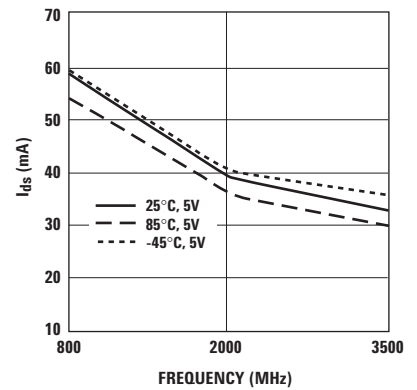


Figure 21.  $I_{ds}$  vs. Frequency. ( $P_{in} = -10$  dBm,  $V_d = 5$  V)


**MGA-565P8 Typical Performance Curves (at 25°C, 2 GHz, unless specified otherwise)**

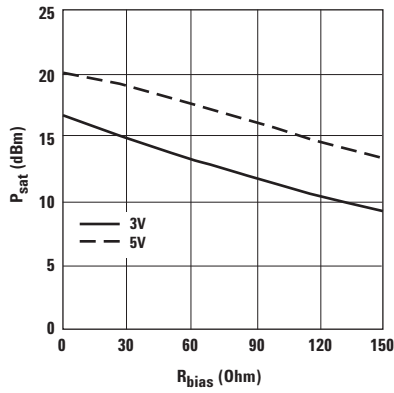


**Figure 22. P<sub>sat</sub> vs. R<sub>bias</sub>,  
P<sub>in</sub> = 0 dBm for V<sub>d</sub> = 3V and 5V.**

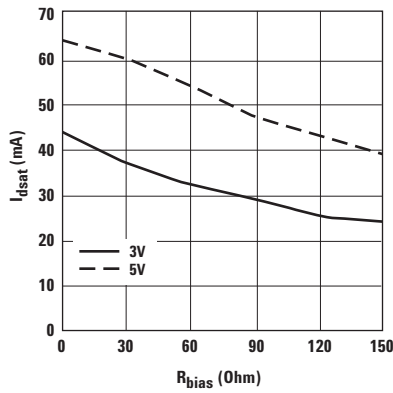


**Figure 23. I<sub>dsat</sub> vs. R<sub>bias</sub>,  
P<sub>in</sub> = 0 dBm for V<sub>d</sub> = 3V and 5V.**

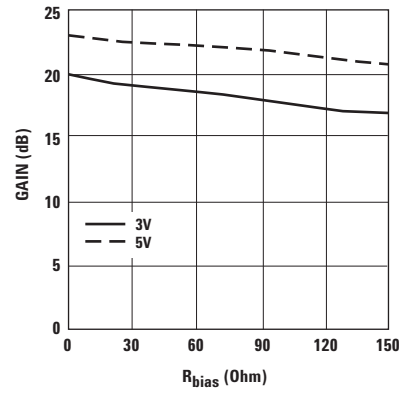

**Figure 24. Gain vs. R<sub>bias</sub>,  
P<sub>in</sub> = -10 dBm for V<sub>d</sub> = 3V and 5V.**

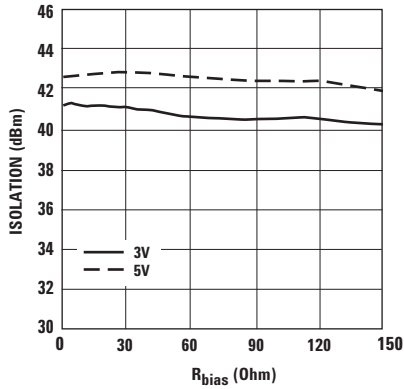

**Figure 25. Isolation vs. R<sub>bias</sub>,  
P<sub>in</sub> = -10 dBm for V<sub>d</sub> = 3V and 5V.**

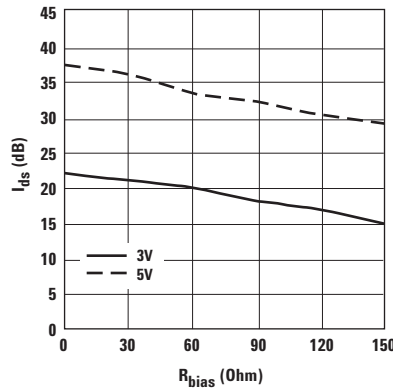

**Figure 26. I<sub>ds</sub> vs. R<sub>bias</sub>,  
P<sub>in</sub> = -10 dBm for V<sub>d</sub> = 3V and 5V.**

**MGA-565P8 Typical Scattering Parameters** (at 25°C,  $V_d = 5V$ ,  $I_d = 35\text{ mA}$ ,  $R_{bias} = 0\Omega$ )

Freq. GHz	$S_{11}$			$S_{21}$			$S_{12}$			$S_{22}$		K
	Mag.	Ang.	dB	Mag.	Ang.	dB	Mag.	Ang.	Mag.	Ang.		
0.1	0.48	-82.9	33.7	48.51	20.3	-66.0	0.001	96.5	0.46	-27.5	12.7	
0.2	0.19	-136.9	33.9	49.83	-21.5	-60.1	0.001	86.2	0.43	-34.8	8.1	
0.3	0.08	127.4	33.5	47.25	-48.8	-56.0	0.002	61.1	0.40	-49.9	5.6	
0.4	0.14	54.5	32.3	41.22	-70.5	-53.1	0.002	39.3	0.38	-61.2	4.6	
0.5	0.20	23.2	32.2	40.90	-90.8	-52.6	0.002	26.6	0.36	-77.0	4.3	
0.6	0.25	0.2	31.5	37.47	-109.9	-51.6	0.003	13.3	0.34	-89.5	4.1	
0.7	0.29	-18.7	30.8	34.58	-127.1	-50.6	0.003	1.3	0.33	-101.8	4.0	
0.8	0.33	-36.0	30.1	32.04	-143.8	-49.5	0.003	-9.5	0.32	-114.5	3.7	
0.9	0.36	-54.3	29.3	29.32	-161.1	-48.0	0.004	-25.4	0.31	-129.7	3.3	
1.0	0.36	-71.0	28.4	26.32	-176.0	-48.1	0.004	-44.9	0.27	-141.3	3.9	
1.1	0.36	-85.0	27.7	24.18	170.1	-48.6	0.004	-56.7	0.25	-149.8	4.5	
1.2	0.37	-98.1	27.1	22.60	156.4	-48.7	0.004	-66.7	0.24	-159.4	4.9	
1.3	0.37	-111.5	26.4	21.01	142.3	-48.7	0.004	-75.9	0.24	-169.0	5.2	
1.4	0.37	-124.1	25.8	19.56	129.1	-48.7	0.004	-85.4	0.23	-178.8	5.6	
1.5	0.38	-135.9	25.3	18.36	116.2	-48.6	0.004	-94.0	0.22	-171.5	6.0	
1.6	0.38	-148.7	24.8	17.36	102.6	-48.5	0.004	-102.9	0.22	-161.7	6.2	
1.7	0.38	-160.8	24.2	16.26	89.5	-48.5	0.004	-111.9	0.21	-151.9	6.6	
1.8	0.38	-172.4	23.7	15.28	76.8	-48.4	0.004	-120.6	0.21	-142.2	7.0	
1.9	0.38	176.3	23.2	14.43	64.4	-48.3	0.004	-129.1	0.20	-132.2	7.4	
2.0	0.38	165.0	22.8	13.73	51.9	-48.3	0.004	-137.0	0.20	-122.5	7.7	
2.1	0.37	153.7	22.3	12.99	39.3	-48.1	0.004	-143.4	0.19	-113.1	8.1	
2.2	0.37	143.3	21.8	12.33	27.3	-46.8	0.005	-151.2	0.19	-105.0	7.4	
2.3	0.37	131.1	21.5	11.86	15.1	-47.0	0.004	-168.4	0.19	-93.0	7.8	
2.4	0.37	119.5	21.1	11.31	2.6	-47.5	0.004	-177.2	0.19	-82.3	8.7	
2.5	0.36	108.2	20.7	10.80	-9.6	-47.5	0.004	-174.1	0.18	-71.7	9.2	
2.6	0.36	96.8	20.3	10.33	-21.5	-47.4	0.004	-165.1	0.18	-61.5	9.5	
2.7	0.35	85.6	19.9	9.91	-33.7	-47.4	0.004	-155.8	0.18	-51.0	10.0	
2.8	0.34	74.0	19.6	9.50	-45.9	-47.3	0.004	-144.5	0.17	-40.0	10.4	
2.9	0.34	62.5	19.2	9.13	-58.1	-47.5	0.004	-131.2	0.17	-28.7	11.1	
3.0	0.32	51.1	18.8	8.70	-70.3	-49.6	0.003	-112.5	0.16	-16.0	15.2	
3.1	0.32	43.0	18.4	8.33	-81.6	-50.7	0.003	-93.5	0.16	-3.4	18.0	
3.2	0.32	31.4	18.1	8.08	-93.5	-49.1	0.004	-73.9	0.16	-7.7	15.4	
3.3	0.31	19.7	17.8	7.78	-105.6	-48.8	0.004	-53.8	0.16	-11.8	15.5	
3.4	0.30	8.1	17.5	7.49	-117.6	-48.9	0.004	-33.4	0.16	-15.8	16.4	
3.5	0.30	-3.7	17.2	7.22	-129.7	-48.8	0.004	-13.3	0.16	-19.9	16.8	
3.6	0.29	-16.1	16.8	6.93	-142.1	-49.3	0.003	7.8	0.17	-24.2	18.8	
3.7	0.27	-29.6	16.4	6.61	-153.3	-49.7	0.003	28.0	0.16	-28.1	20.8	
3.8	0.25	-43.8	16.1	6.37	-165.9	-49.3	0.003	58.1	0.14	-32.2	21.0	
3.9	0.22	-59.0	15.5	5.96	-178.3	-48.7	0.004	88.2	0.13	-36.6	21.5	
4.0	0.14	-64.5	14.7	5.44	171.9	-45.6	0.005	118.3	0.14	-41.1	16.9	
4.1	0.16	-41.6	14.6	5.37	165.1	-43.9	0.006	148.4	0.15	-46.0	13.8	
4.2	0.22	-56.0	14.8	5.50	153.7	-43.7	0.007	178.5	0.15	-50.9	12.9	
4.3	0.23	-73.2	14.7	5.42	141.0	-44.0	0.006	208.6	0.15	-55.8	13.6	
4.4	0.22	-87.9	14.4	5.26	128.9	-44.3	0.006	238.7	0.15	-60.7	14.5	
4.5	0.21	-99.6	14.1	5.06	117.2	-45.1	0.006	268.8	0.14	-65.6	16.5	
4.6	0.20	-110.4	13.7	4.86	106.0	-47.2	0.004	298.9	0.13	-70.5	22.2	
4.7	0.19	-111.2	13.6	4.77	96.6	-48.8	0.004	329.0	0.09	-75.4	27.6	
4.8	0.23	-127.2	13.6	4.76	83.4	-44.0	0.006	359.1	0.12	-80.3	15.6	
4.9	0.22	-140.4	13.2	4.59	72.3	-47.0	0.004	389.2	0.11	-85.2	22.9	
5.0	0.21	-153.3	13.0	4.48	60.8	-46.4	0.005	419.3	0.11	-90.1	22.1	
5.1	0.21	-165.3	12.8	4.37	49.3	-46.9	0.005	449.4	0.11	-95.0	24.0	
5.2	0.20	-177.2	12.6	4.25	37.7	-47.5	0.004	479.5	0.11	-100.0	26.3	
5.3	0.20	170.5	12.3	4.14	26.2	-47.8	0.004	509.6	0.11	-105.0	28.3	
5.4	0.19	158.7	12.1	4.02	14.7	-47.4	0.004	539.7	0.12	-110.0	27.7	
5.5	0.19	146.7	11.8	3.90	3.4	-44.5	0.006	569.8	0.13	-115.0	20.3	
5.6	0.18	135.4	11.6	3.79	-8.0	-42.6	0.007	599.9	0.13	-120.0	16.8	
5.7	0.18	123.7	11.3	3.68	-19.4	-42.5	0.008	630.0	0.14	-125.0	17.1	
5.8	0.18	111.4	11.0	3.56	-30.5	-43.2	0.007	660.1	0.14	-130.0	19.3	
5.9	0.18	100.4	10.8	3.45	-41.7	-44.2	0.006	690.2	0.14	-135.0	22.1	
6.0	0.18	88.9	10.4	3.32	-52.7	-44.1	0.006	720.3	0.16	-140.0	22.6	



**MGA-565P8 Typical Scattering Parameters** (at 25°C,  $V_d = 3V$ ,  $I_d = 20\text{ mA}$ ,  $R_{bias} = 0\Omega$ )

Freq. GHz	$S_{11}$			$S_{21}$			$S_{12}$			$S_{22}$		K
	Mag.	Ang.	dB	Mag.	Ang.	dB	Mag.	Ang.	Mag.	Ang.		
0.1	0.53	-75.3	30.8	34.87	27.3	-62.9	0.001	105.7	0.48	-27.5	11.2	
0.2	0.17	-116.2	31.1	35.82	-21.4	-55.2	0.002	89.1	0.45	-34.4	6.3	
0.3	0.00	162.6	30.6	34.07	-47.6	-52.3	0.002	61.2	0.43	-53.8	5.0	
0.4	0.12	26.9	29.4	29.48	-71.1	-50.5	0.003	36.9	0.40	-72.6	4.7	
0.5	0.18	3.8	29.4	29.43	-89.6	-48.9	0.004	25.1	0.38	-83.5	3.9	
0.6	0.24	-13.8	28.6	26.95	-108.7	-47.9	0.004	10.7	0.36	-97.1	3.8	
0.7	0.28	-30.1	27.9	24.85	-126.0	-47.0	0.004	-3.0	0.34	-111.3	3.7	
0.8	0.31	-45.9	27.2	22.90	-142.7	-46.2	0.005	-16.6	0.32	-125.3	3.6	
0.9	0.33	-61.5	26.4	20.95	-159.2	-45.7	0.005	-30.3	0.30	-138.5	3.7	
1.0	0.34	-75.5	25.6	19.15	-174.2	-45.4	0.005	-43.6	0.27	-150.8	4.0	
1.1	0.35	-89.0	24.9	17.63	171.4	-45.3	0.005	-55.7	0.25	-162.2	4.3	
1.2	0.36	-101.9	24.3	16.46	157.5	-45.2	0.005	-67.1	0.24	-173.9	4.5	
1.3	0.37	-114.8	23.7	15.30	143.4	-45.2	0.005	-77.7	0.22	175.0	4.9	
1.4	0.37	-127.0	23.1	14.25	130.1	-45.2	0.006	-88.0	0.21	164.8	5.2	
1.5	0.37	-138.4	22.5	13.38	117.2	-45.1	0.006	-97.1	0.19	155.1	5.6	
1.6	0.38	-150.8	22.1	12.67	103.7	-45.0	0.006	-106.8	0.19	144.7	5.8	
1.7	0.37	-162.4	21.5	11.89	90.4	-45.0	0.006	-116.1	0.18	134.0	6.2	
1.8	0.37	-173.8	21.0	11.20	77.8	-44.9	0.006	-125.0	0.16	124.2	6.6	
1.9	0.37	175.2	20.5	10.59	65.3	-44.9	0.006	-134.0	0.16	114.5	6.9	
2.0	0.37	164.3	20.1	10.09	52.7	-44.8	0.006	-142.2	0.15	104.7	7.2	
2.1	0.37	153.2	19.6	9.57	40.0	-44.7	0.006	-150.0	0.14	94.9	7.6	
2.2	0.37	142.9	19.1	9.05	27.9	-43.8	0.006	-157.7	0.14	87.3	7.3	
2.3	0.37	131.2	18.8	8.75	15.6	-43.8	0.006	-172.5	0.13	76.1	7.5	
2.4	0.36	119.9	18.4	8.35	3.1	-44.1	0.006	178.3	0.12	64.7	8.2	
2.5	0.35	108.8	18.1	7.99	-9.2	-44.2	0.006	169.9	0.12	53.6	8.7	
2.6	0.35	97.8	17.7	7.65	-21.2	-44.1	0.006	161.0	0.11	43.9	9.0	
2.7	0.35	86.8	17.3	7.34	-33.5	-44.0	0.006	151.0	0.11	34.0	9.3	
2.8	0.34	75.7	17.0	7.04	-45.8	-43.8	0.006	140.5	0.10	23.2	9.7	
2.9	0.33	64.4	16.6	6.76	-58.0	-43.9	0.006	128.6	0.10	12.0	10.2	
3.0	0.32	53.6	16.2	6.45	-70.2	-45.1	0.006	115.1	0.10	-0.7	12.5	
3.1	0.32	44.9	15.9	6.20	-81.7	-45.5	0.005	119.6	0.09	-8.0	13.5	
3.2	0.32	33.7	15.6	6.00	-93.8	-44.6	0.006	111.0	0.09	-15.5	12.6	
3.3	0.31	22.3	15.2	5.78	-106.0	-44.4	0.006	101.1	0.09	-26.4	12.9	
3.4	0.31	11.3	14.9	5.56	-118.0	-44.5	0.006	91.5	0.08	-34.8	13.5	
3.5	0.30	-0.1	14.6	5.35	-130.0	-44.5	0.006	82.2	0.09	-43.1	14.2	
3.6	0.29	-11.9	14.2	5.15	-142.1	-45.1	0.006	72.4	0.10	-54.3	15.8	
3.7	0.28	-24.4	14.0	5.00	-154.1	-45.1	0.006	76.0	0.10	-92.6	16.4	
3.8	0.27	-37.4	13.6	4.79	-166.8	-44.5	0.006	63.6	0.06	-97.0	16.1	
3.9	0.25	-51.6	13.1	4.53	-179.4	-44.9	0.006	56.0	0.05	-99.7	18.2	
4.0	0.20	-66.7	12.5	4.21	168.6	-45.2	0.006	58.1	0.05	-100.9	20.6	
4.1	0.13	-63.3	11.7	3.85	159.7	-43.6	0.007	61.7	0.06	-101.1	19.3	
4.2	0.18	-48.6	11.8	3.87	152.0	-43.5	0.007	39.9	0.06	-115.6	18.7	
4.3	0.21	-64.6	11.8	3.89	140.0	-43.2	0.007	13.8	0.06	-132.4	17.7	
4.4	0.22	-80.1	11.6	3.80	127.7	-43.6	0.007	2.6	0.06	-143.7	18.9	
4.5	0.21	-91.4	11.3	3.66	116.0	-44.3	0.006	-23.8	0.06	-165.6	21.2	
4.6	0.21	-102.3	10.9	3.52	104.7	-44.2	0.006	-50.6	0.05	172.5	22.0	
4.7	0.20	-105.6	10.7	3.42	95.0	-44.9	0.006	-115.3	0.02	156.2	24.6	
4.8	0.24	-120.3	10.6	3.41	82.1	-44.4	0.006	4.5	0.04	-175.3	23.0	
4.9	0.23	-133.3	10.3	3.28	71.1	-44.6	0.006	-34.5	0.03	166.0	24.5	
5.0	0.22	-146.0	10.1	3.20	59.8	-43.8	0.006	-47.7	0.03	164.1	23.1	
5.1	0.22	-158.0	9.8	3.10	48.4	-44.1	0.006	-61.1	0.03	166.9	24.6	
5.2	0.22	-170.0	9.6	3.01	37.0	-44.8	0.006	-72.7	0.03	162.5	27.4	
5.3	0.21	177.7	9.3	2.92	25.6	-45.9	0.005	-82.5	0.04	157.3	32.4	
5.4	0.21	165.5	9.0	2.82	14.3	-48.1	0.004	-84.1	0.04	153.6	43.1	
5.5	0.20	152.8	8.7	2.73	3.4	-48.1	0.004	-64.4	0.06	139.9	44.3	
5.6	0.20	142.6	8.5	2.66	-7.4	-44.2	0.006	-70.4	0.06	125.5	29.2	
5.7	0.20	131.3	8.2	2.58	-18.6	-43.0	0.007	-90.9	0.07	111.2	26.2	
5.8	0.20	118.6	8.0	2.50	-29.4	-43.7	0.007	-109.0	0.08	97.5	29.4	
5.9	0.19	106.8	7.7	2.43	-40.0	-45.6	0.005	-115.0	0.09	89.2	37.4	
6.0	0.19	94.9	7.5	2.36	-50.3	-46.4	0.005	-106.5	0.12	73.1	42.2	


## Device Models

Refer to Agilent's Web Site  
[www.agilent.com/view/rf](http://www.agilent.com/view/rf)

## Ordering Information

Part Number	No. of Devices	Container
MGA-565P8-TR1	3000	7" Reel
MGA-565P8-TR2	10000	13" Reel
MGA-565P8-BLK	100	antistatic bag


## 2x2 LPCC (JEDEC DFP-N) Package Dimensions

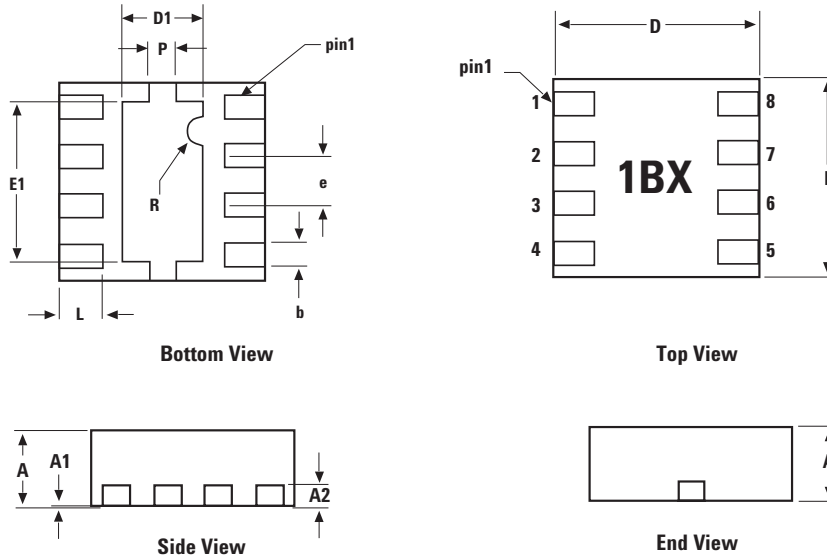


SYMBOL	DIMENSIONS		
	MIN.	NOM.	MAX.
A	0.70	0.75	0.80
A1	0	0.02	0.05
A2		0.203 REF	
b	0.225	0.25	0.275
D	1.9	2.0	2.1
D1	0.65	0.80	0.95
E	1.9	2.0	2.1
E1	1.45	1.6	1.75
e		0.50 BSC	

DIMENSIONS ARE IN MILLIMETERS

## PCB Land Pattern and Stencil Design

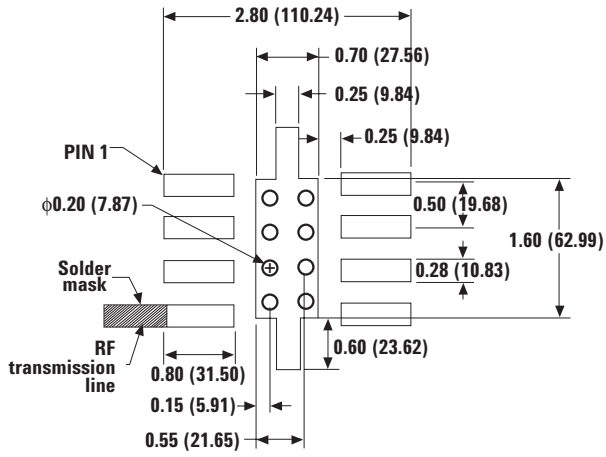



PCB Land Pattern (top view)

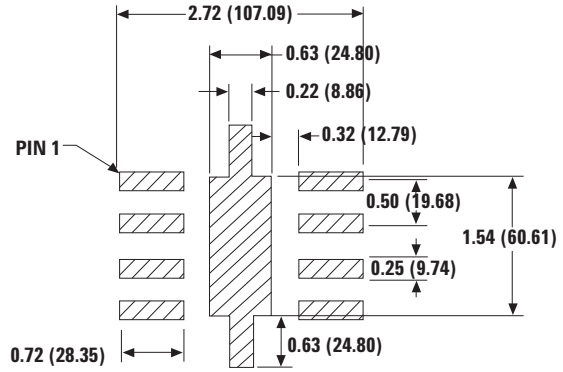


Stencil Layout (top view)

**Notes:** Typical stencil thickness is 5 mils.  
Measurements are in millimeters (mils).

## Device Orientation

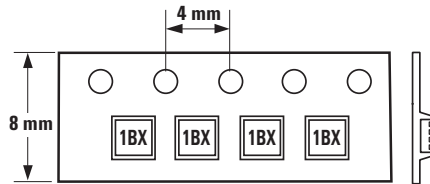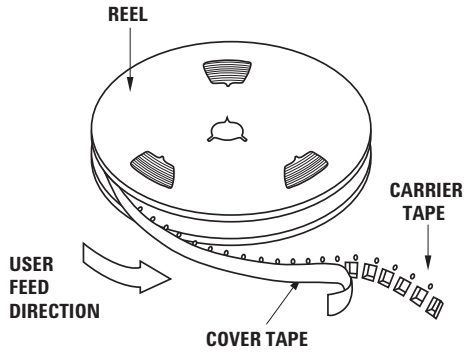

## Tape Dimensions

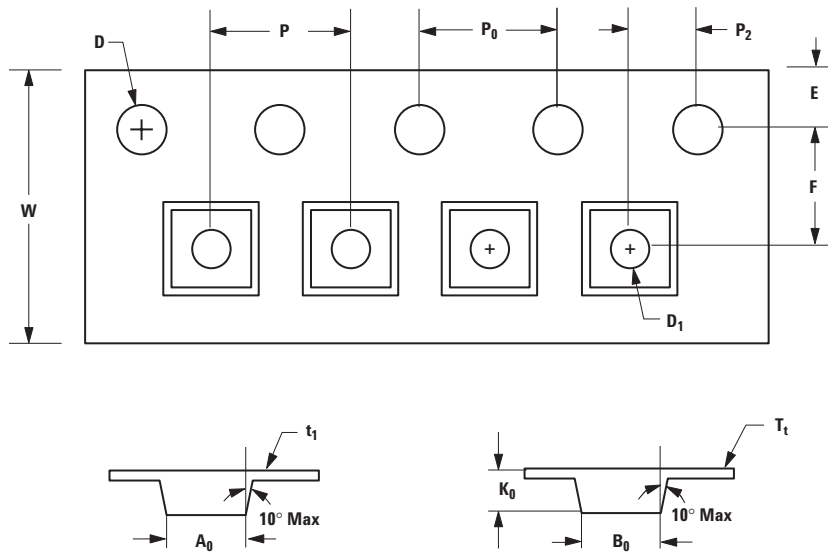

DESCRIPTION		SYMBOL	SIZE (mm)	SIZE (inches)
CAVITY	LENGTH	$A_0$	$2.30 \pm 0.05$	$0.091 \pm 0.004$
	WIDTH	$B_0$	$2.30 \pm 0.05$	$0.091 \pm 0.004$
	DEPTH	$K_0$	$1.00 \pm 0.05$	$0.039 \pm 0.002$
	PITCH	$P$	$4.00 \pm 0.10$	$0.157 \pm 0.004$
	BOTTOM HOLE DIAMETER	$D_1$	$1.00 \pm 0.25$	$0.039 \pm 0.002$
PERFORATION	DIAMETER	$D$	$1.50 \pm 0.10$	$0.060 \pm 0.004$
	PITCH	$P_0$	$4.00 \pm 0.10$	$0.157 \pm 0.004$
	POSITION	$E$	$1.75 \pm 0.10$	$0.069 \pm 0.004$
CARRIER TAPE	WIDTH	$W$	$8.00 \pm 0.30$ $8.00 - 0.10$	$0.315 \pm 0.012$ $0.315 \pm 0.004$
	THICKNESS	$t_1$	$0.254 \pm 0.02$	$0.010 \pm 0.0008$
COVER TAPE	WIDTH	$C$	$5.4 \pm 0.10$	$0.205 \pm 0.004$
	TAPE THICKNESS	$T_t$	$0.062 \pm 0.001$	$0.0025 \pm 0.0004$
DISTANCE	CAVITY TO PERFORATION (WIDTH DIRECTION)	$F$	$3.50 \pm 0.05$	$0.138 \pm 0.002$
	CAVITY TO PERFORATION (LENGTH DIRECTION)	$P_2$	$2.00 \pm 0.05$	$0.079 \pm 0.002$

## [www.agilent.com/semiconductors](http://www.agilent.com/semiconductors)

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or (916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (65) 6756 2394

India, Australia, New Zealand: (65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or 0120-61-1280(Domestic Only)

Korea: (65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines, Indonesia: (65) 6755 2044

Taiwan: (65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

Obsoletes 5988-9368EN

October 25, 2004



**Agilent Technologies**