

Ultrafast Rectifier

Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature
- Lead-Free ("PbF" suffix)

$$t_{rr} = 25\text{ns}$$

$$I_{F(AV)} = 16\text{Amp}$$

$$V_R = 200\text{V}$$

Description/Applications

International Rectifier's MUR... series are the state of the art Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time.

The planar structure and the platinum doped life time control, guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as free-wheeling diode in low voltage inverters and chopper motor drives.


Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

Absolute Maximum Ratings


Parameters		Max	Units
V_{RRM}	Peak Repetitive Peak Reverse Voltage	200	V
$I_{F(AV)}$	Average Rectified Forward Current Per Leg	8.0	A
	Total Device, (Rated V_R) $T_C = 150^\circ\text{C}$ Total Device	16	
I_{FSM}	Non Repetitive Peak Surge Current Per Leg	100	
I_{FM}	Peak Repetitive Forward Current Per Leg (Rated V_R , Square wave, 20 KHz), $T_C = 150^\circ\text{C}$	16	
T_J, T_{STG}	Operating Junction and Storage Temperatures	-65 to 175	$^\circ\text{C}$

Case Styles

MUR1620PbF



TO-220AB



Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameters	Min	Typ	Max	Units	Test Conditions
V_{BR} , V_f Breakdown Voltage, Blocking Voltage	200	-	-	V	$I_R = 100\mu\text{A}$
V_F Forward Voltage	-	-	0.975	V	$I_F = 8\text{A}$
	-	-	0.895	V	$I_F = 8\text{A}$, $T_J = 150^\circ\text{C}$
I_R Reverse Leakage Current	-	-	5	μA	$V_R = V_R$ Rated
	-	-	250	μA	$T_J = 150^\circ\text{C}$, $V_R = V_R$ Rated
C_T Junction Capacitance	-	25	-	pF	$V_R = 200\text{V}$
L_S Series Inductance	-	8.0	-	nH	Measured lead to lead 5mm from package body

Dynamic Recovery Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameters	Min	Typ	Max	Units	Test Conditions
t_{rr} Reverse Recovery Time	-	-	35	ns	$I_F = 1.0\text{A}$, $di_F/dt = 50\text{A}/\mu\text{s}$, $V_R = 30\text{V}$
	-	-	25		$I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{REC} = 0.25\text{A}$
	-	20	-		$T_J = 25^\circ\text{C}$
	-	34	-		$T_J = 125^\circ\text{C}$
I_{RRM} Peak Recovery Current	-	1.7	-	A	$T_J = 25^\circ\text{C}$
	-	4.2	-		$T_J = 125^\circ\text{C}$
Q_{rr} Reverse Recovery Charge	-	23	-	nC	$T_J = 25^\circ\text{C}$
	-	75	-		$T_J = 125^\circ\text{C}$

Thermal - Mechanical Characteristics

Parameters	Min	Typ	Max	Units
T_J Max. Junction Temperature Range	- 65	-	175	$^\circ\text{C}$
T_{Stg} Max. Storage Temperature Range	- 65	-	175	
R_{thJC} Thermal Resistance, Junction to Case Per Leg	-	-	3.0	
R_{thJA} Thermal Resistance, Junction to Ambient Per Leg	-	-	50	$^\circ\text{C}/\text{W}$
$R_{thCS}^{\text{①}}$ Thermal Resistance, Case to Heatsink	-	0.5	-	
Wt Weight	-	2.0	-	g
	-	0.07	-	(oz)
Mounting Torque	6.0	-	12	Kg-cm
	5.0	-	10	lbf.in
Marking Device	MUR1620			

① Mounting Surface, Flat, Smooth and Greased

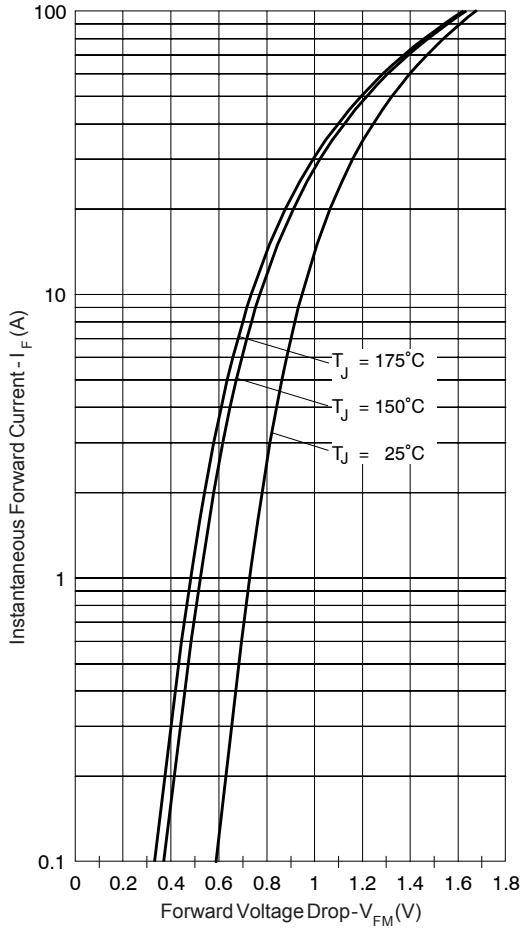


Fig. 1 - Typical Forward Voltage Drop Characteristics

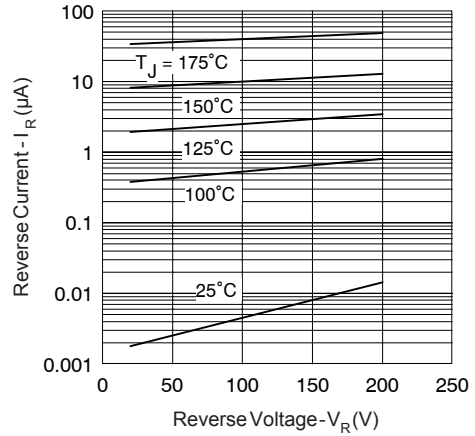


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

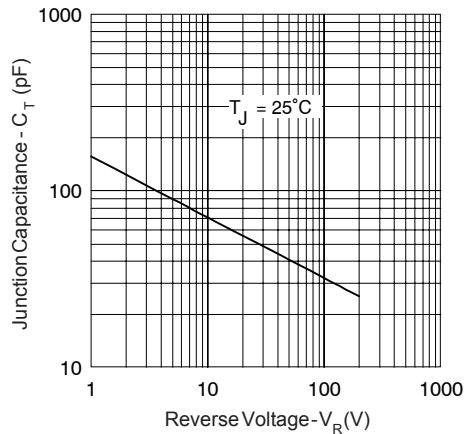


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

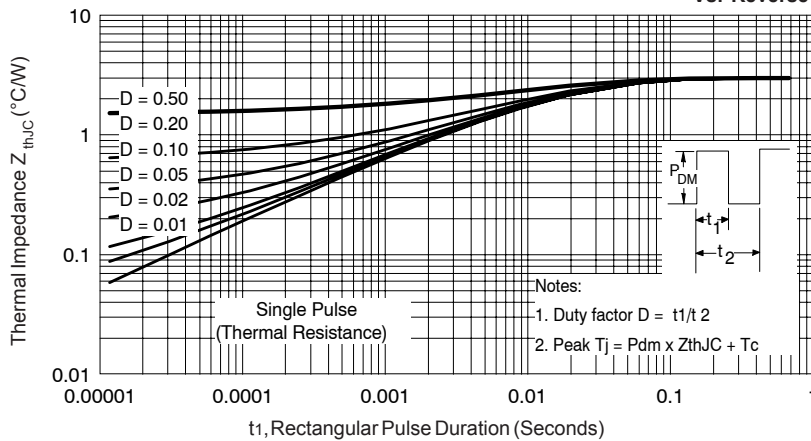


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

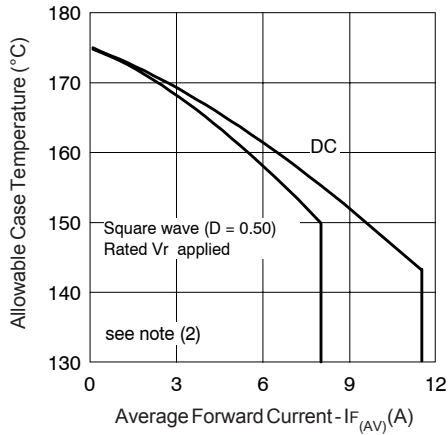


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

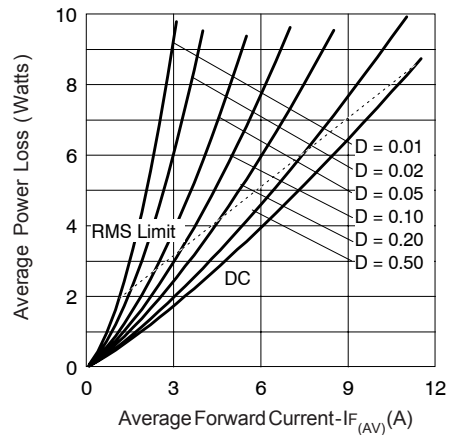


Fig. 6 - Forward Power Loss Characteristics

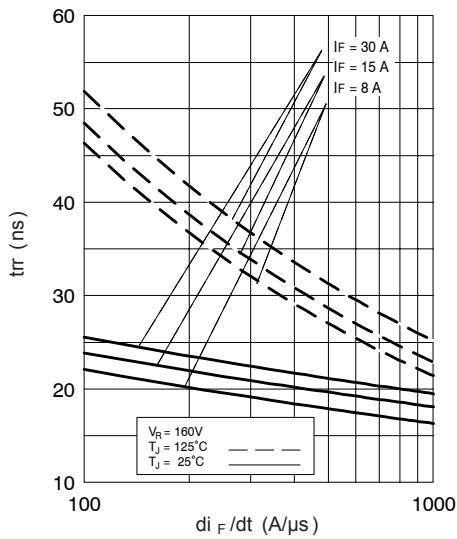


Fig. 7 - Typical Reverse Recovery vs. di_F/dt

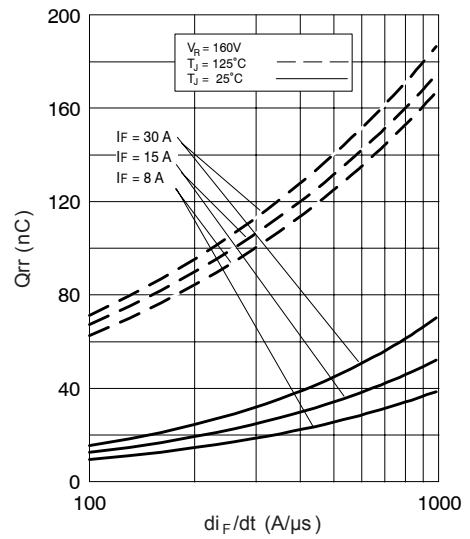


Fig. 8 - Typical Stored Charge vs. di_F/dt

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = \text{rated } V_R$

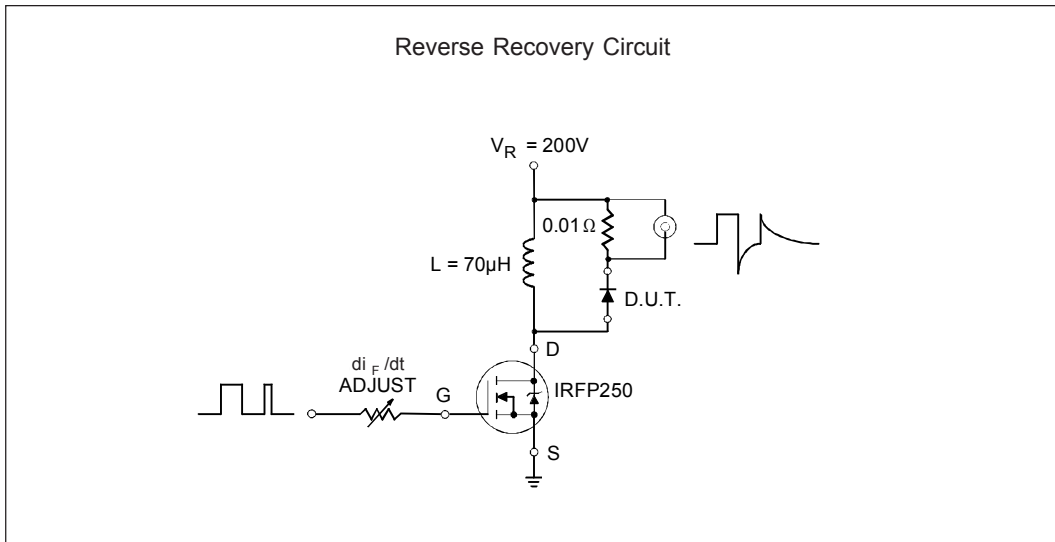


Fig. 9- Reverse Recovery Parameter Test Circuit

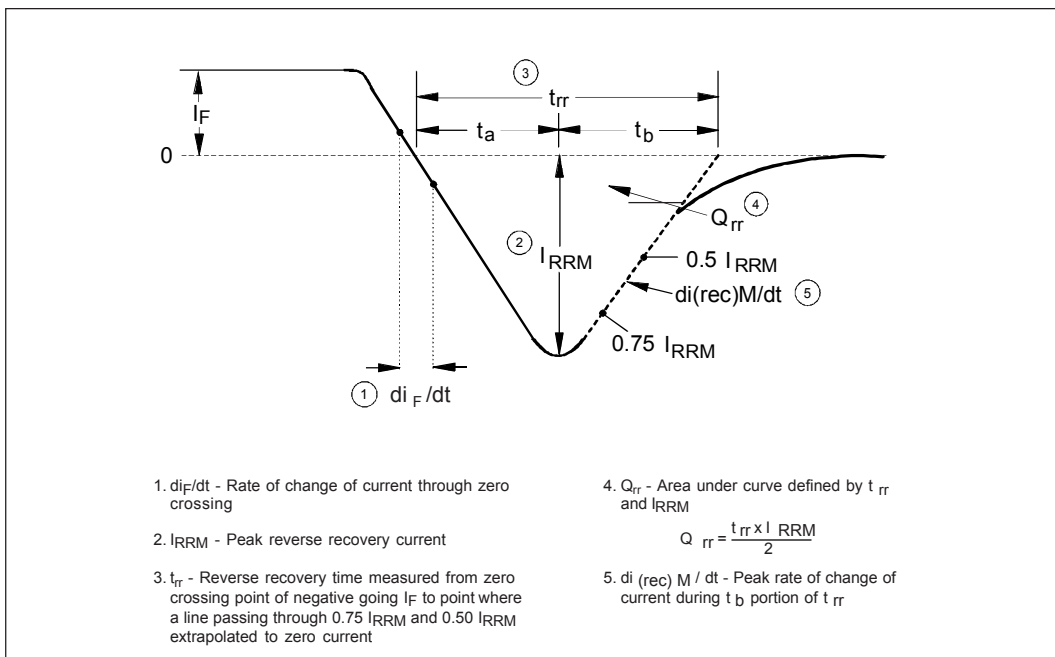


Fig. 10 - Reverse Recovery Waveform and Definitions

Ordering Information Table

Device Code											
	<table border="1"><tr><td>MUR</td><td>16</td><td>20</td><td>CT</td><td>PbF</td></tr><tr><td>①</td><td>②</td><td>③</td><td>④</td><td>⑤</td></tr></table>	MUR	16	20	CT	PbF	①	②	③	④	⑤
MUR	16	20	CT	PbF							
①	②	③	④	⑤							
1	- Ultrafast MUR Series										
2	- Current Rating (16 = 16A)										
3	- Voltage Rating (20 = 200V)										
4	- CT = Center Tap (Dual)										
5	- <ul style="list-style-type: none">• none = Standard Production• PbF = Lead-Free										
Tube Standard Pack Quantity : 50 pieces											

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.