



IGBT MODULE Chopper 300A 600V

PCHMB300A6C

CIRCUIT

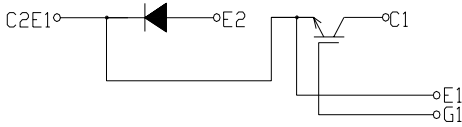

OUTLINE DRAWING

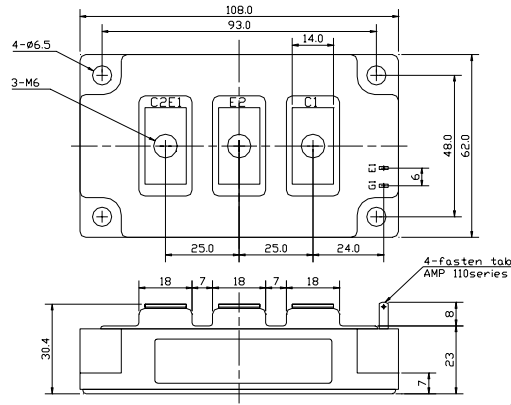

2-fasten- tab No 110

Dimension(mm)

Approximate Weight : 450g

MAXMUM RATINGS (Tc=25°C)

Item	Symbol	PCHMB300A6C	Unit
Collector-Emitter Voltage	V_{CES}	600	V
Gate - Emitter Voltage	V_{GES}	+/- 20	V
Collector Current	DC	I_c	300
	1 ms	I_c	600
Collector Power Dissipation	P_c	1040	W
Junction Temperature Range	T_j	-40 to +150	°C
Storage Temperature Range	T_{stg}	-40 to +125	°C
Isolation Voltage (Terminal to Base AC, 1 min.)	V_{ISO}	2500	V
Mounting Torque	Module Base to Heat sink	F_{TOR}	3.06
	Bus Bar to Main Terminals		
			N•m

ELECTRICAL CHARACTERISTICS (Tc=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Emitter Cut-Off Current	I_{CES}	$V_{CE}=600V, V_{GE}=0V$	-	-	3.0	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{GE}=\pm 20V, V_{CE}=0V$	-	-	1.0	μA
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_c=300A, V_{GE}=15V$	-	2.1	2.6	V
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{CE}=5V, I_c=300mA$	4.0	-	8.0	V
Input Capacitance	C_{ies}	$V_{CE}=10V, V_{GE}=0V, f=1MHz$	-	30000	-	pF
Switching Time	Rise Time	t_r	-	0.2	0.4	μs
	Turn-on Time	t_{on}	-	0.4	0.75	
	Fall Time	t_f	-	0.2	0.35	
	Turn-off Time	t_{off}	-	0.6	0.8	

FREE WHEELING DIODES RATINGS & CHARACTERISTICS (Tc=25°C)

Item	Symbol	Rated Value	Unit
Forward Current	DC	I_F	300
	1 ms	I_{FM}	600
			A

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Peak Forward Voltage	V_F	$I_F=300A, V_{GE}=0V$	-	1.9	2.4	V
Reverse Recovery Time	t_{rr}	$I_F=300A, V_{GE}=-10V, di/dt=300A/\mu s$	-	0.15	0.25	μs

THERMAL CHARACTERISTICS

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Thermal Impedance	IGBT	$R_{th(j-c)}$	Junction to Case		0.12	°C/W
	DIODE		-	-	0.24	

Fig.1- Output Characteristics (Typical)

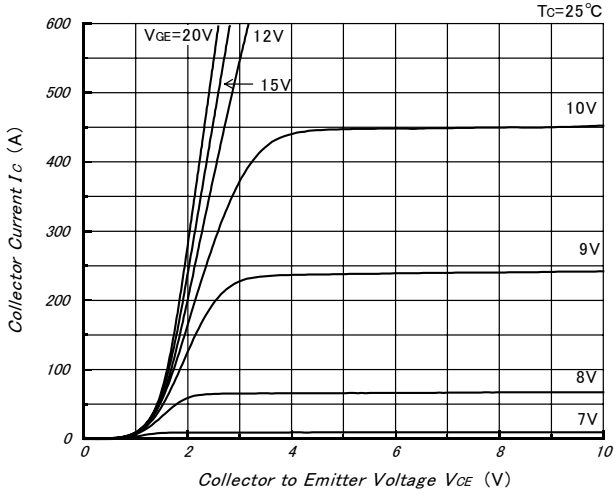


Fig.2- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

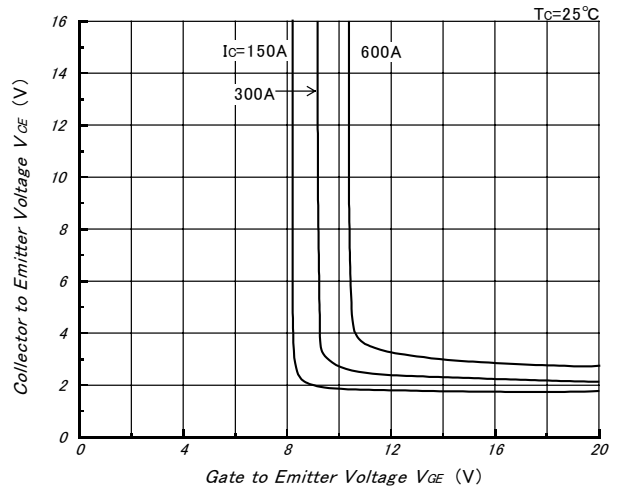


Fig.3- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

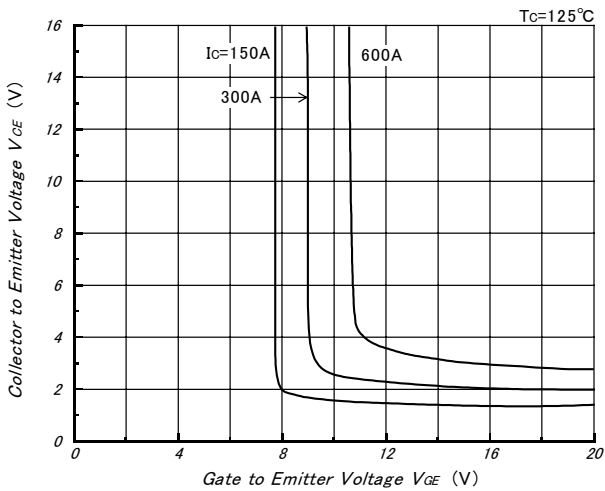


Fig.4- Gate Charge vs. Collector to Emitter Voltage (Typical)

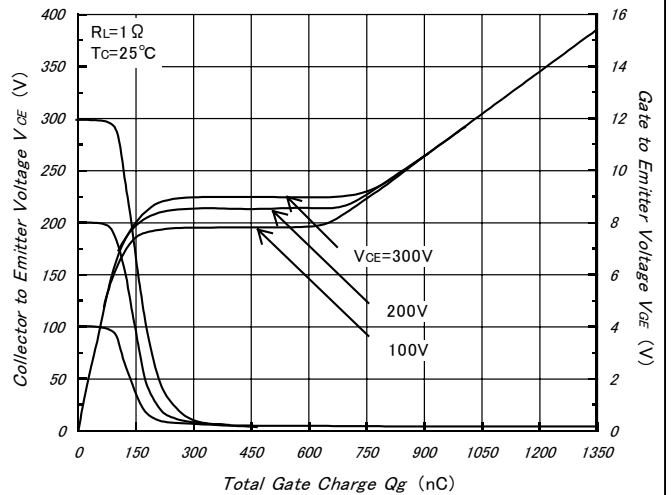


Fig.5- Capacitance vs. Collector to Emitter Voltage (Typical)

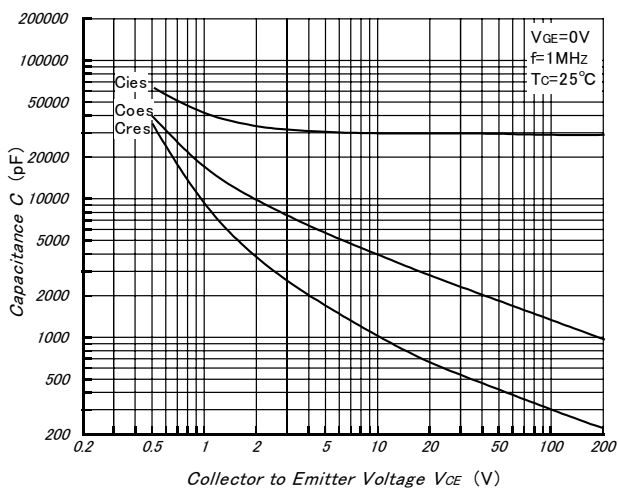


Fig.6- Collector Current vs. Switching Time (Typical)

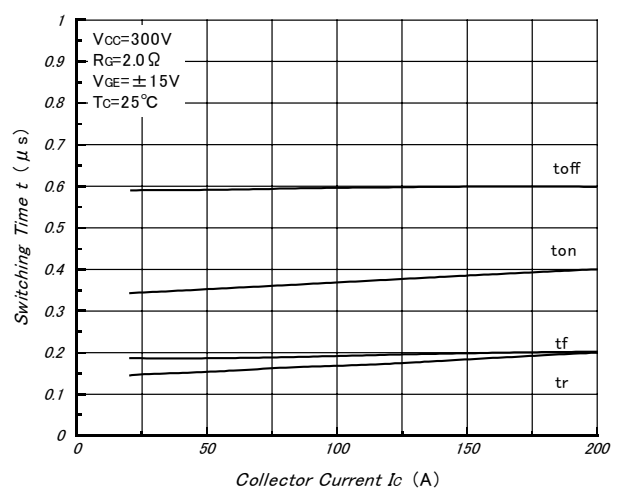


Fig.7- Series Gate Impedance vs. Switching Time (Typical)

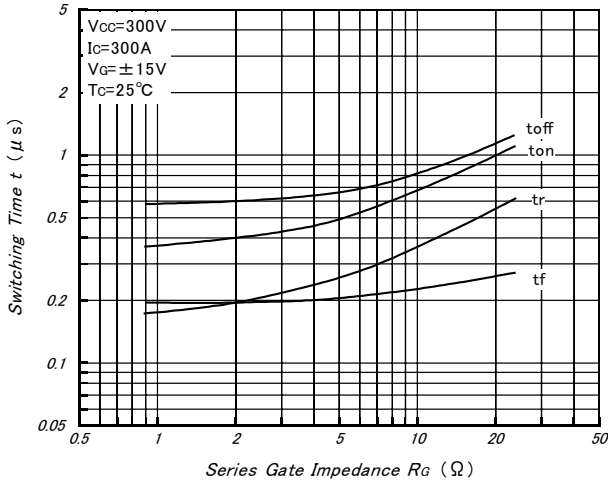


Fig.8- Forward Characteristics of Free Wheeling Diode (Typical)

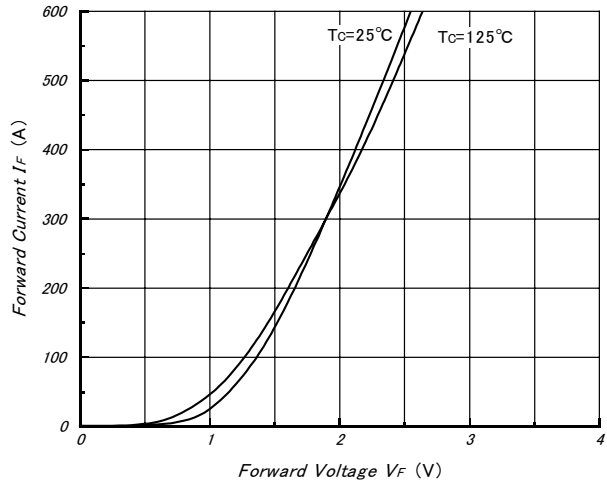


Fig.9- Reverse Recovery Characteristics (Typical)

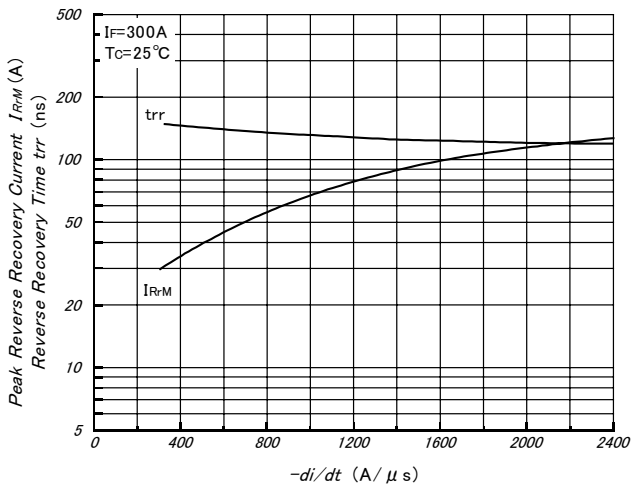


Fig.10- Reverse Bias Safe Operating Area (Typical)

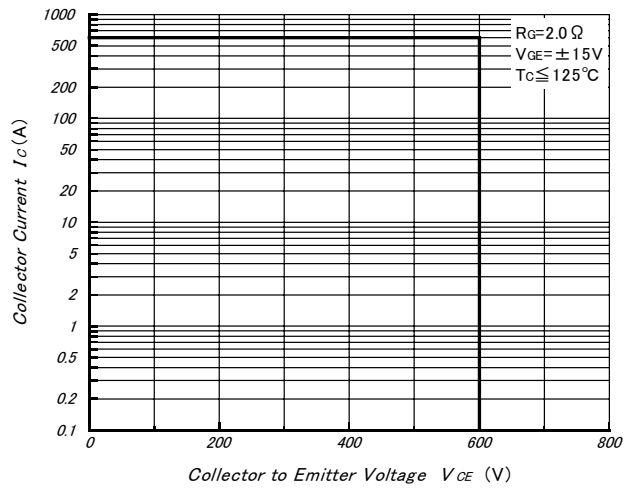


Fig.11- Transient Thermal Impedance

