



# IGBT MODULE Dual 200A 1200V

# PDMB200B12C2

## CIRCUIT

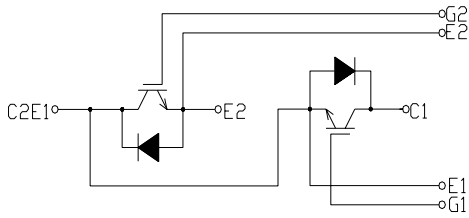

## OUTLINE DRAWING

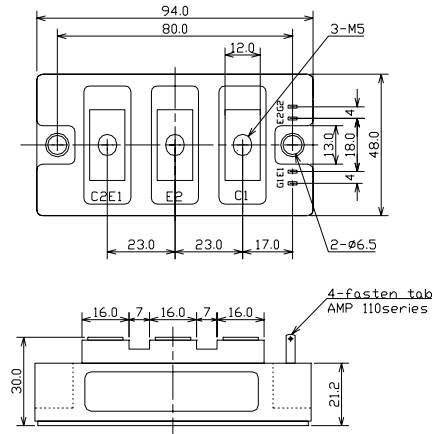

4-faster- tab No 110

Dimension(mm)

Approximate Weight : 320g

## MAXMUM RATINGS (Tc=25°C)

Item	Symbol	PDMB200B12C2	Unit
Collector-Emitter Voltage	$V_{CES}$	1200	V
Gate - Emitter Voltage	$V_{GES}$	+/- 20	V
Collector Current	DC	$I_C$	200
	1 ms	$I_C$	400
Collector Power Dissipation	$P_C$	960	W
Junction Temperature Range	$T_j$	-40 to +150	°C
Storage Temperature Range	$T_{sg}$	-40 to +125	°C
Isolation Voltage (Terminal to Base AC, 1 min.)	$V_{ISO}$	2500	V
Mounting Torque	Module Base to Heat sink	$F_{TOR}$	2.04
	Bus Bar to Main Terminals		

## ELECTRICAL CHARACTERISTICS (Tc=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Emitter Cut-Off Current	$I_{CES}$	$V_{CE}=1200V, V_{GE}=0V$	-	-	4.0	mA
Gate-Emitter Leakage Current	$I_{GES}$	$V_{GE}=\pm 20V, V_{CE}=0V$	-	-	1.0	$\mu A$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=200A, V_{GE}=15V$	-	1.9	2.4	V
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{CE}=5V, I_C=200mA$	4.0	-	8.0	V
Input Capacitance	$C_{ies}$	$V_{CE}=10V, V_{GE}=0V, f=1MHz$	-	16,600	-	pF
Switching Time	Rise Time	$V_{CC}=600V$ $R_L=3\text{ ohm}$ $R_G=2\text{ ohm}$ $V_{GE}=\pm 15V$	-	0.25	0.45	$\mu s$
	Turn-on Time		-	0.40	0.7	
	Fall Time		-	0.25	0.35	
	Turn-off Time		-	0.80	1.10	

## FREE WHEELING DIODES RATINGS & CHARACTERISTICS (Tc=25°C)

Item	Symbol	Rated Value	Unit
Forward Current	DC	$I_F$	200
	1 ms	$I_{FM}$	400

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Peak Forward Voltage	$V_F$	$I_F=200A, V_{GE}=0V$	-	1.9	2.4	V
Reverse Recovery Time	$t_r$	$I_F=200A, V_{GE}=-10V, di/dt=400A/\mu s$	-	0.2	0.3	$\mu s$

## THERMAL CHARACTERISTICS

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Thermal Impedance	IGBT	$R_{th(j-c)}$ Junction to Case	-	-	0.125	°C/W
	DIODE		-	-	0.24	

Fig.1- Output Characteristics (Typical)

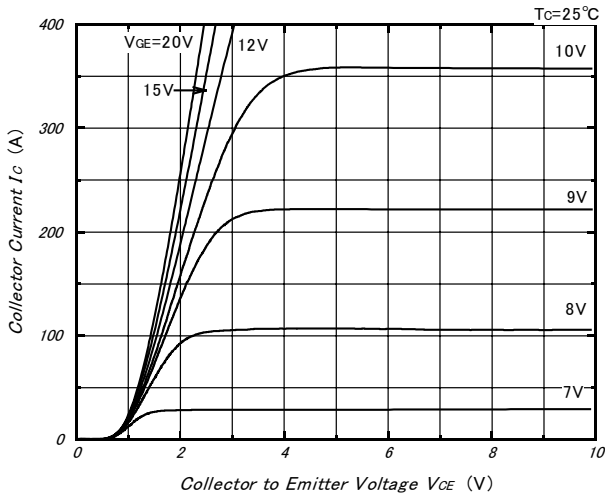


Fig.2- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

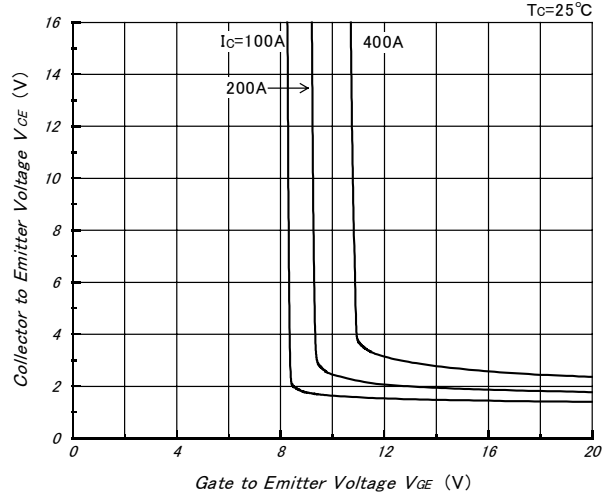


Fig.3- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

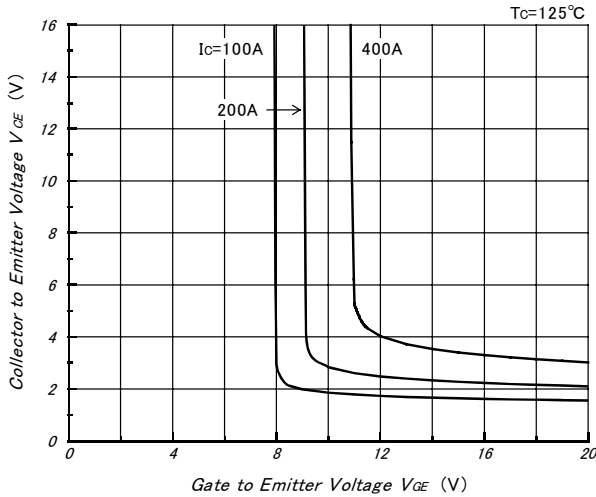


Fig.4- Gate Charge vs. Collector to Emitter Voltage (Typical)

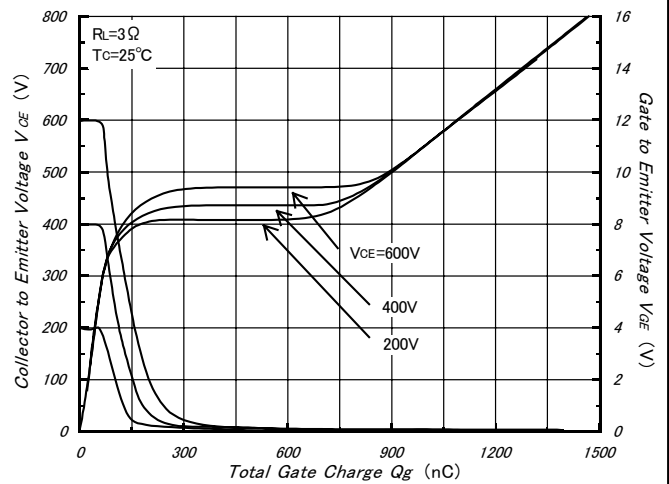


Fig.5- Capacitance vs. Collector to Emitter Voltage (Typical)

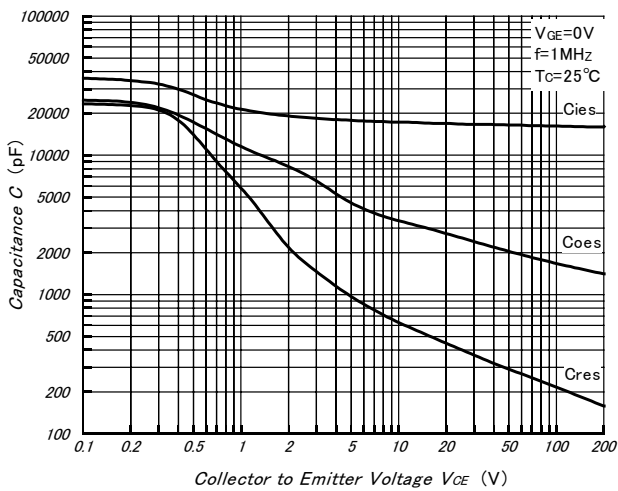


Fig.6- Collector Current vs. Switching Time (Typical)

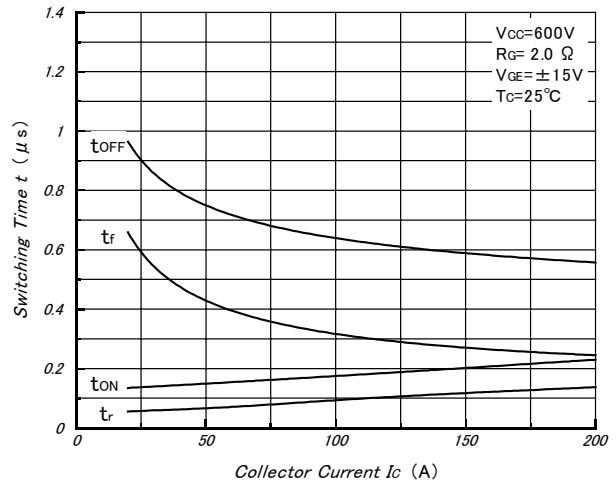


Fig.7- Series Gate Impedance vs. Switching Time (Typical)

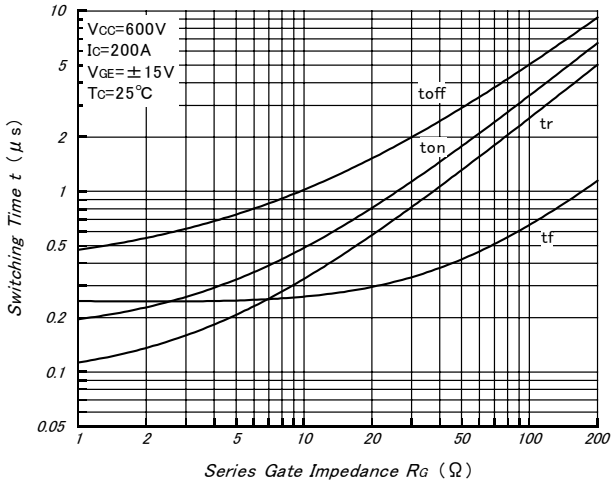


Fig.8- Forward Characteristics of Free Wheeling Diode (Typical)

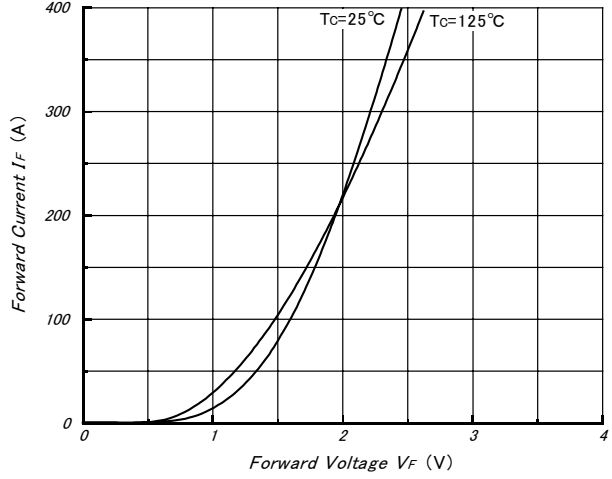


Fig.9- Reverse Recovery Characteristics (Typical)

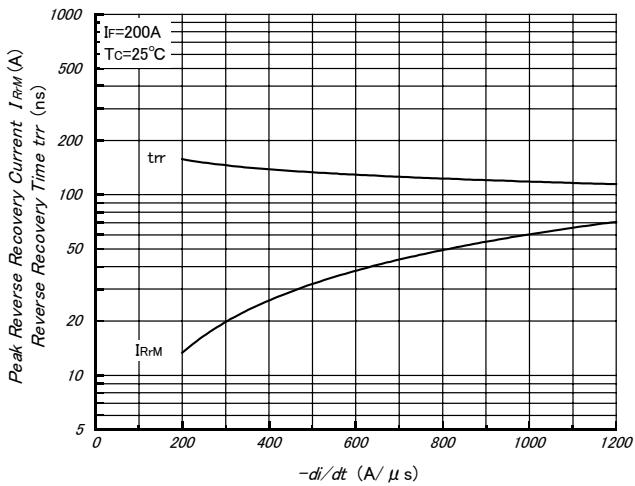


Fig.10- Reverse Bias Safe Operating Area

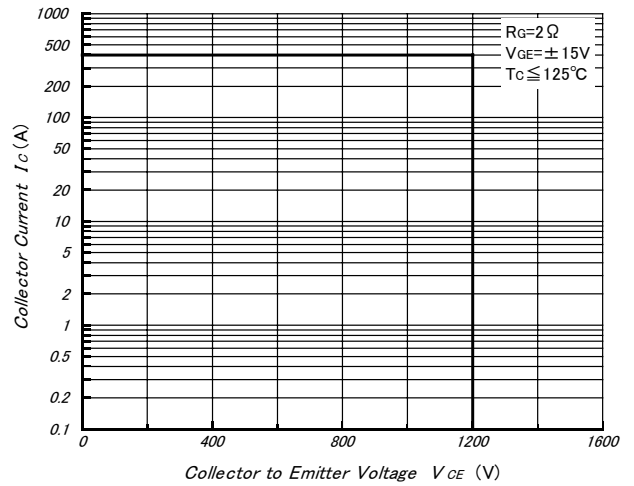


Fig.11- Transient Thermal Impedance

