

## PRODUCT PROFILE # 506

### PS41

### Power Supply – 13.6 Vdc at 1.6 Amps

The PS41 regulated power supply will provide 13.5 to 13.8 Vdc output at 1.6 amps from -40 to +66 degrees C (-40 to +150 degrees F), 100% relative humidity. It offers both input and output fusing for complete protection of the power supply and connected equipment. It comes with 6-foot (1.8 m) long AC cord with tinned leads and strain relief. Supplied with a 1/2 " strain relief cable entry to the power out terminal strip. Easy mounting keyholes on the chassis flange are provided as shown below. The PS41 is intended for indoor use or to be mounted in a ventilated box if used outdoors. The unit weights 5 pounds.



### FEATURES

#### Input:

- 210 to 230 Volts AC Input
- 50 to 60 Hertz
- 0.2 Amp Draw Maximum
- 1 Amp Slo-Blo Fuse

#### Output:

- 13.5 to 13.8 Vdc Output
- 1.6 Amps Regulated
- Ripple/Noise Max. 30 mV P/P
- 2 Amp Fuse

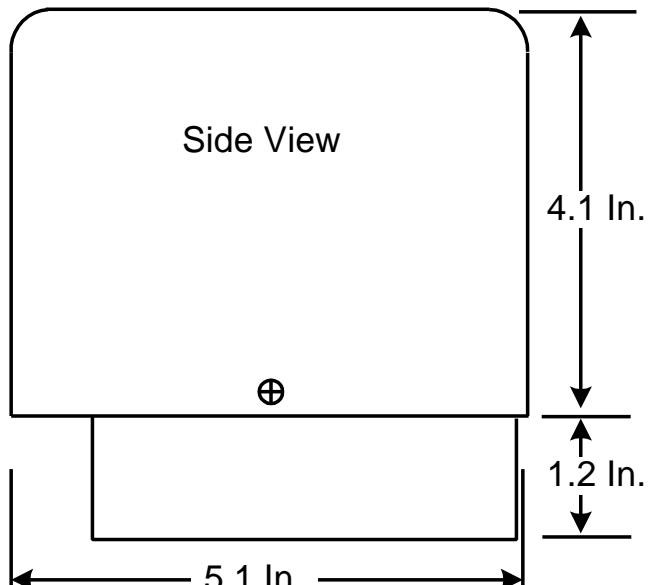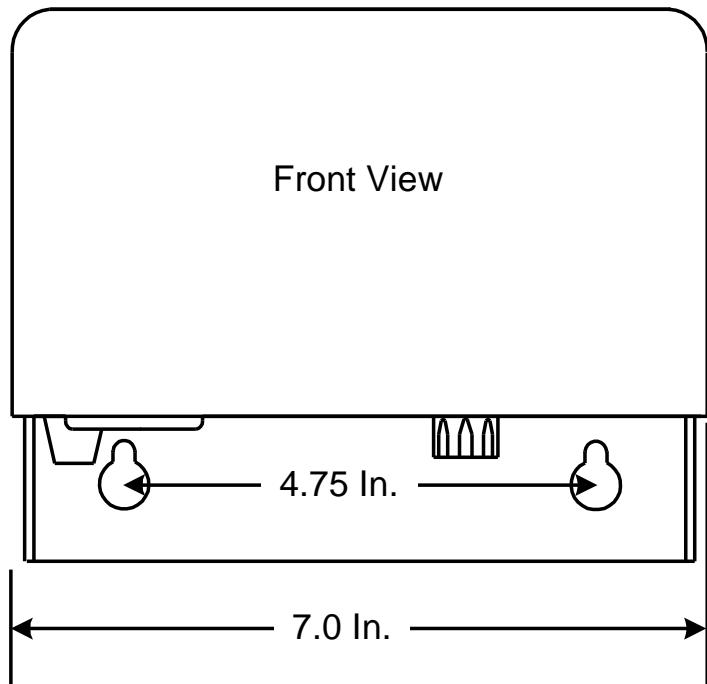

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)