



Certificate Number: Q10561

Certificate Number: E17276

RG2 - RG2Z

ULTRA FAST RECOVERY RECTIFIER DIODES


PRV : 200 - 400 Volts
Io : 1.2 Amperes

FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency

MECHANICAL DATA :

- * Case : D2 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.465 gram

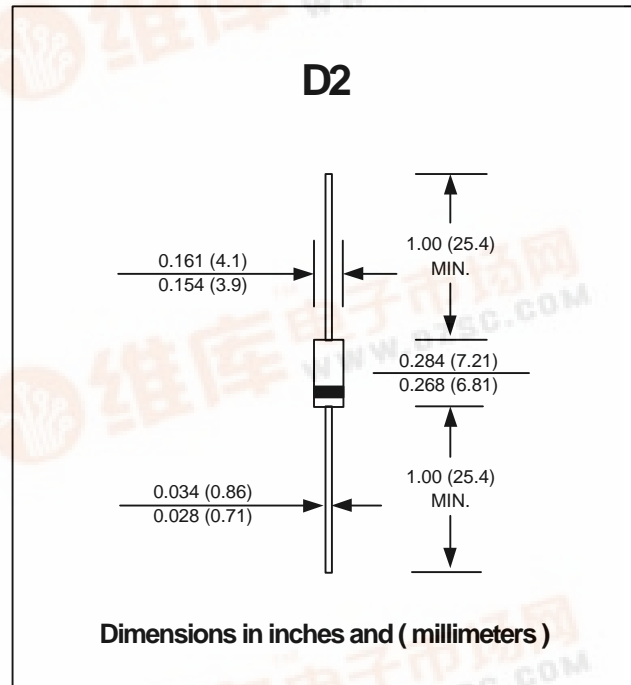

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	RG2Z	RG2	UNITS
Maximum Peak Reverse Voltage	V _{RM}	200	400	Volts
Maximum Peak Reverse Surge Voltage	V _{RSM}	200	400	Volts
Maximum Average Forward Current Ta = 60 °C	I _{F(AV)}	1.2		Amps.
Maximum Peak Forward Surge Current (50 Hz, Half-cycle, Sine wave, Single Shot)	I _{FSM}	50		Amps.
Maximum Forward Voltage at I _F = 1.5A	V _F	1.5		Volts
Maximum Reverse Current at V _R = V _{RM} Ta = 25 °C	I _R	0.5		mA
Maximum Reverse Current at V _R = V _{RM} Ta = 100 °C	I _{R(H)}	2.5		mA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	100		ns
Junction Temperature Range	T _J	- 40 to + 150		°C
Storage Temperature Range	T _{STG}	- 40 to + 150		°C

Notes :

(1) Reverse Recovery Test Conditions : I_F = 100 mA, I_{RP} = 100 mA.



RATING AND CHARACTERISTIC CURVES (RG2 - RG2Z)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

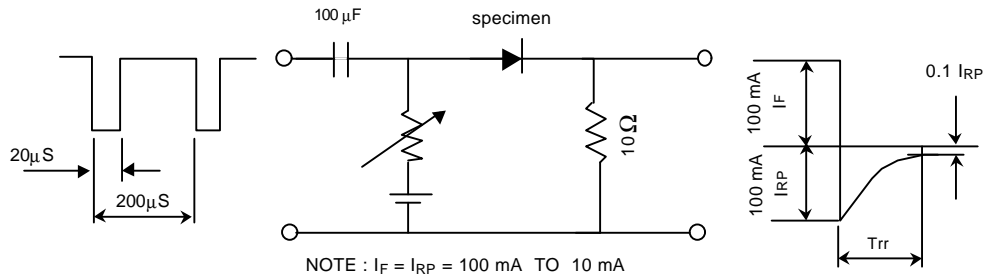


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

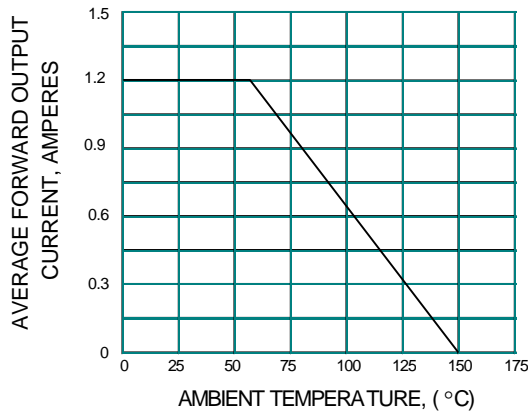


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

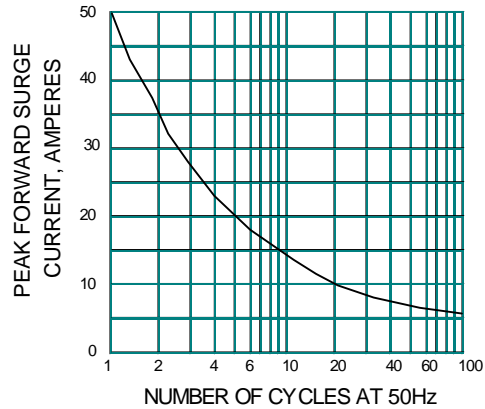


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

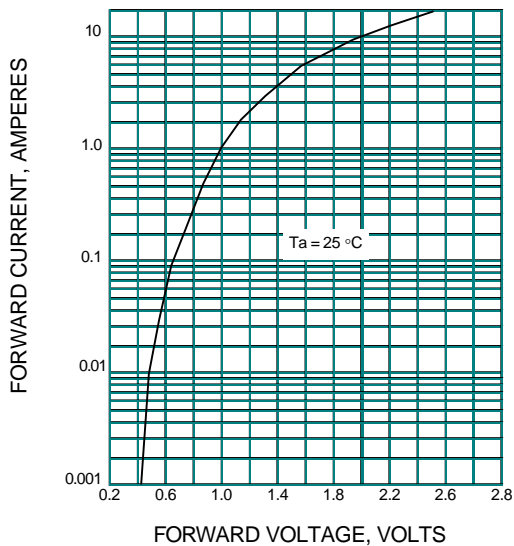


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

