



Certificate Number: Q10561

Certificate Number: E17276

RU2 - RU2Z

PRV : 200 - 800 Volts
Io : 1.0 Ampere


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency

MECHANICAL DATA :

- * Case : D2 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.465 gram


FAST RECOVERY RECTIFIER DIODES

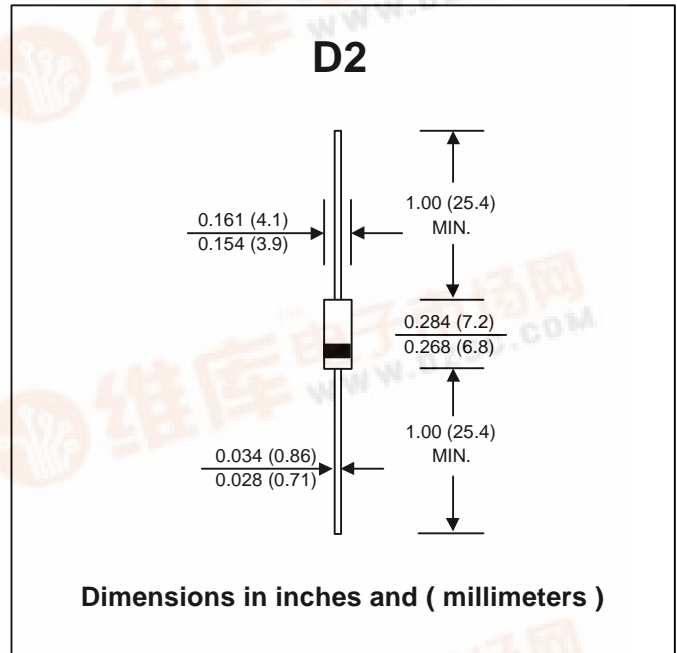

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATING	SYMBOL	RU2Z	RU2	RU2B	UNIT
Maximum Peak Reverse Voltage	V _{RM}	200	600	800	V
Maximum Peak Reverse Surge Voltage	V _{RSM}	250	650	850	V
Maximum Average Forward Current Ta = 50 °C	I _{F(AV)}		1.0		A
Maximum Peak Forward Surge Current (50 Hz, Half-cycle, Sine wave, Single Shot)	I _{FSM}		20		A
Maximum Forward Voltage at I _F = 1 Amp.	V _F		1.5		V
Maximum Reverse Current at V _R = V _{RM} Ta = 25 °C	I _R		10		μA
Maximum Reverse Current at V _R = V _{RM} Ta = 100 °C	I _{R(H)}		300		μA
Maximum Reverse Recovery Time (Note 1)	T _{rr}		400		ns
Junction Temperature Range	T _J		- 40 to + 150		°C
Storage Temperature Range	T _{STG}		- 40 to + 150		°C

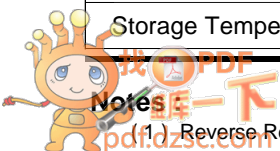

RATING AND CHARACTERISTIC CURVES (RU2 - RU2Z)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

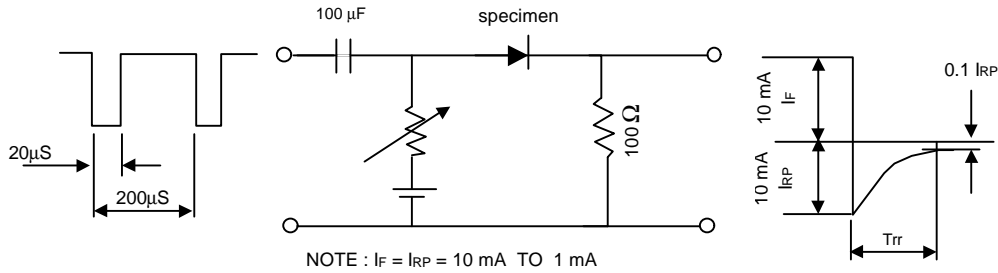


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

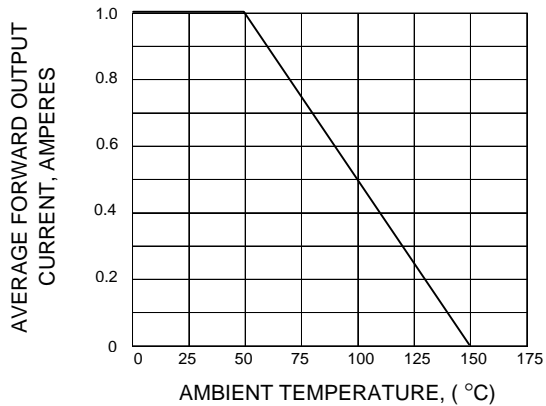


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

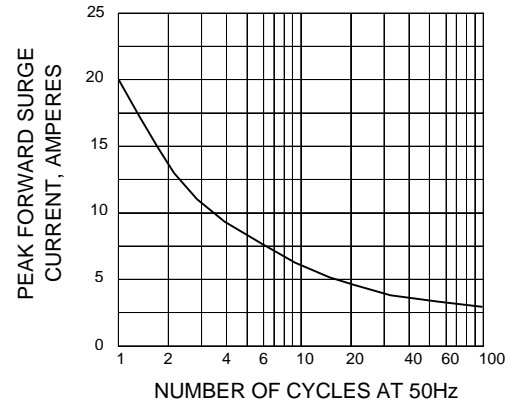


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

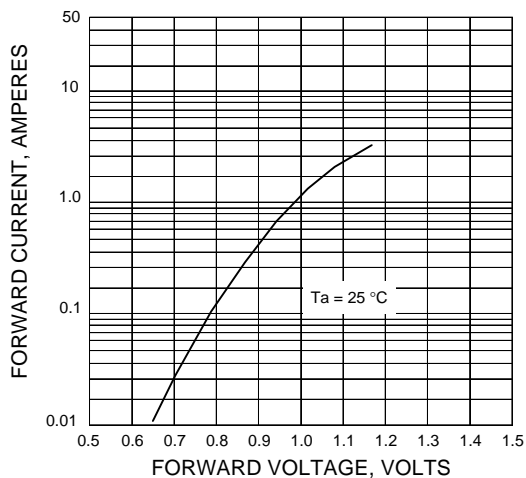


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

