


# SD1020T Thru SD10100T

## SCHOTTKY BARRIER RECTIFIER VOLTAGE - 20 to 100 Volts CURRENT - 10.0 Amperes

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For thorough hole applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds at terminals

### TO-251AB

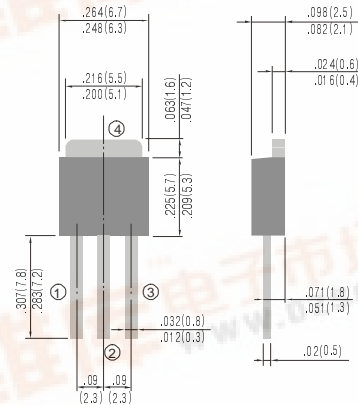

### MECHANICAL DATA


Case: TO-251AB molded plastic  
 Terminals: Solder plated, solderable per MIL-STD-750, Method 2026  
 Polarity: Color band denotes cathode  
 Weight: 0.015 ounce, 0.4 gram.

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.  
 Resistive or inductive load.

	SYMBOLS	SD1020T	SD1030T	SD1040T	SD1050T	SD1060T	SD1080T	SD10100T	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	Volts
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	70	Volts
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	Volts
Maximum Average Forward Rectified Current at $T_c=75^\circ\text{C}$	$I_{(AV)}$	10.0	10.0	10.0	10.0	10.0	10.0	10.0	Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	200	200	200	200	200	200	200	Amps
Maximum Instantaneous Forward Voltage at 10.0A (Note 1)	$V_F$	0.55	0.55	0.55	0.75	0.75	0.85	0.85	Volts
Maximum DC Reverse Current (Note 1) $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	$I_R$	0.2 20	0.2 20	0.2 20	0.2 20	0.2 20	0.2 20	0.2 20	mA
Maximum Thermal Resistance (Note 2)	$R_{\theta JC}$ $R_{\theta JA}$	6 80	6 80	6 80	6 80	6 80	6 80	6 80	$^\circ\text{C} / \text{W}$
Operating Junction Temperature Range	$T_J$	-55 to +125							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150							$^\circ\text{C}$


NOTES:  
 1. Pulse test with  $PW=300\mu\text{sec}$ , 2% Duty Cycle.  
 2. Mounted on P.C. Board with  $14\text{mm}^2$  (.013mm thick) copper pad areas.




**RATING AND CHARACTERISTIC CURVES**

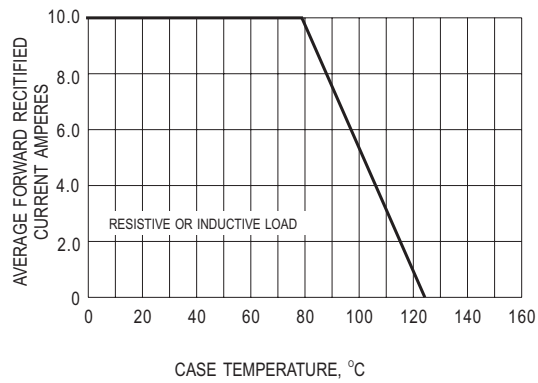


**Fig.1- FORWARD CURRENT DERATING CURVE**

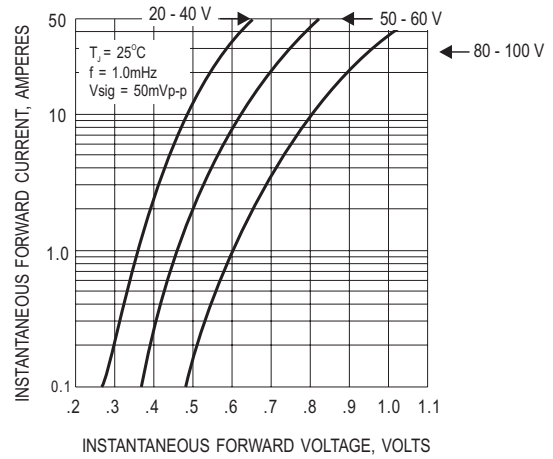


**Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC**

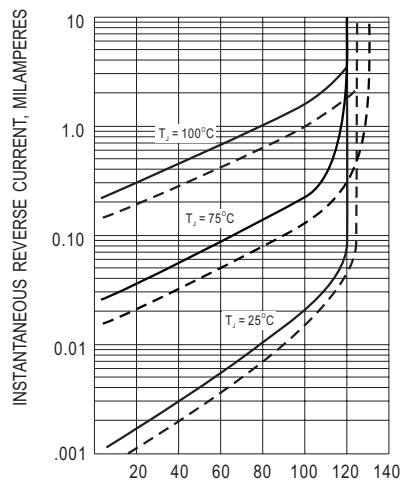

**Fig.3- TYPICAL REVERSE CHARACTERISTIC**

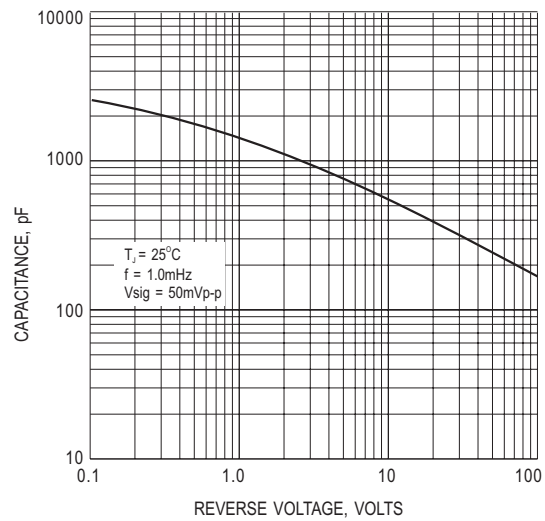

**Fig.4- TYPICAL JUNCTION CAPACITANCE**

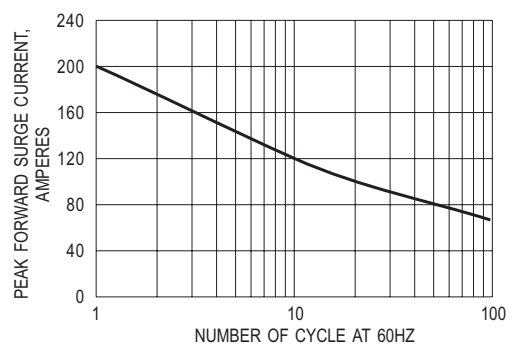

**Fig.5- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**