



# SR3517 / SR3517(B)


LED Lamp

## Features

- Red colored diffusion lens type
- $\phi 3\text{mm}$ (T-1) all plastic mold type
- Low power consumption

## Outline Dimensions

unit : mm

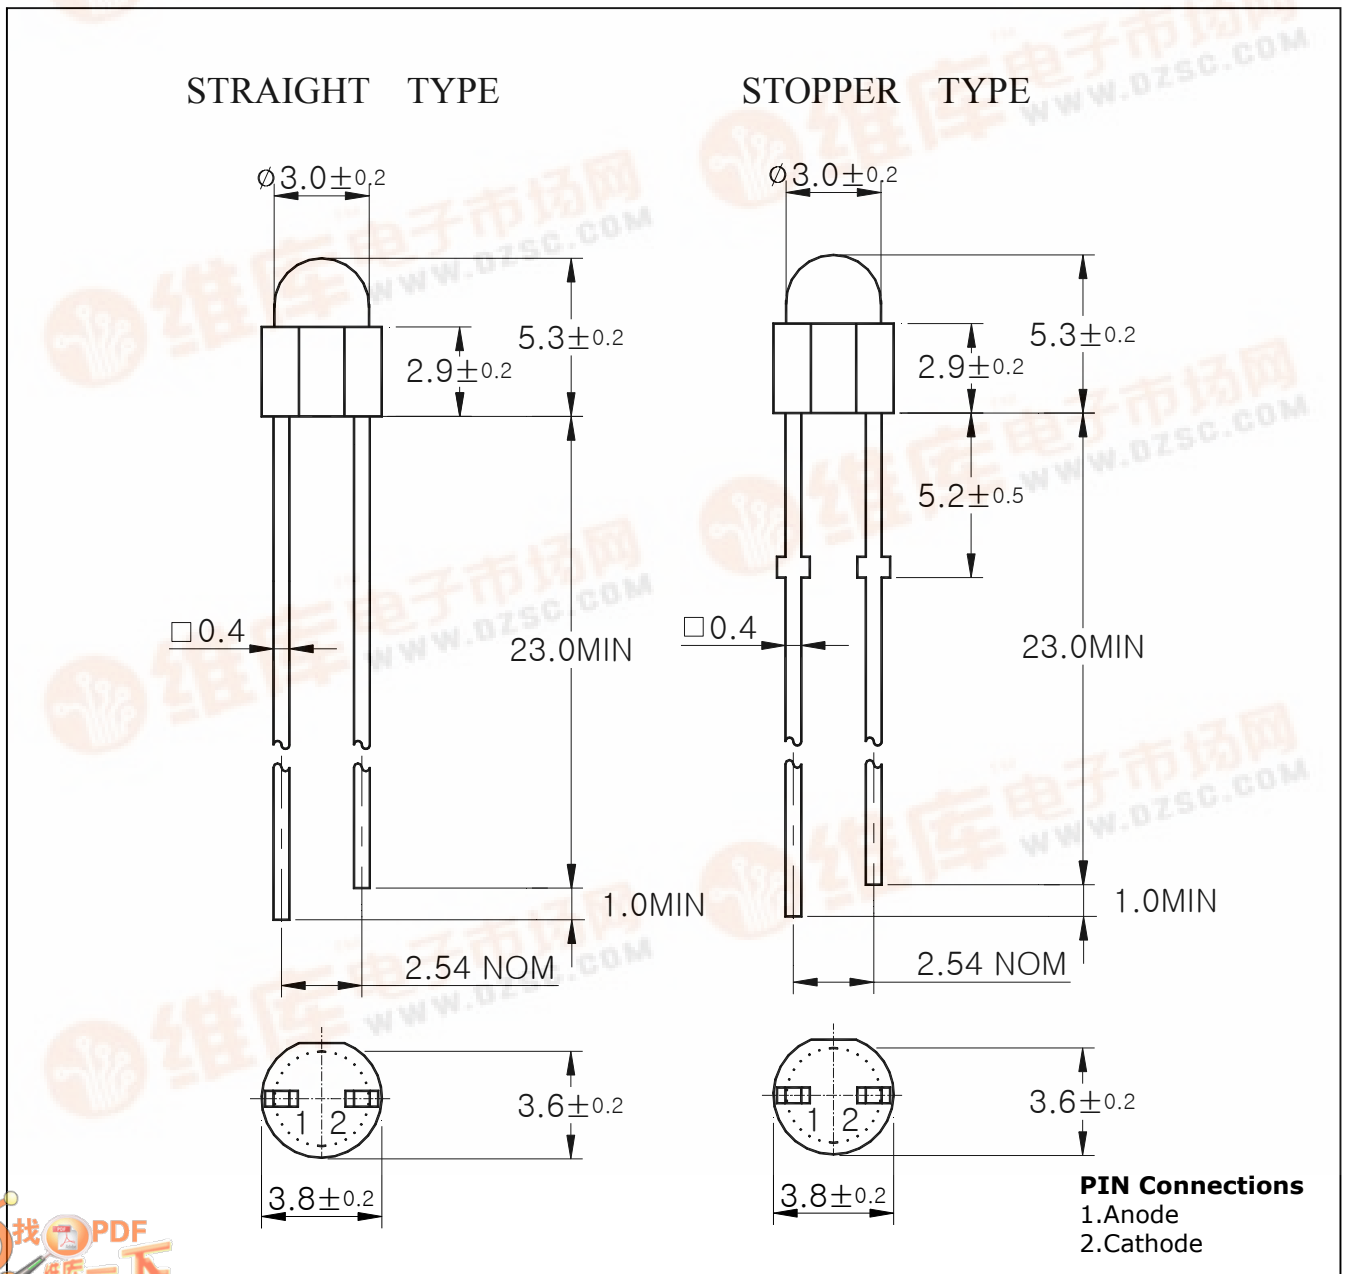


## Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Power Dissipation	$P_D$	23	mW
Forward Current	$I_F$	10	mA
*1Peak Forward Current	$I_{FP}$	50	mA
Reverse Voltage	$V_R$	4	V
Operating Temperature	$T_{opr}$	-25 ~ 85	°C
Storage Temperature	$T_{stg}$	-30 ~ 100	°C
*2Soldering Temperature	$T_{sol}$	260°C for 5 seconds	

\*1.Duty ratio = 1/16, Pulse width = 0.1ms

\*2.Keep the distance 2.0mm from PCB to the bottom of LED



## Electrical Characteristics

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$	$I_F = 5\text{mA}$	-	1.9	2.5	V
*3Luminous Intensity	$I_V$	$I_F = 5\text{mA}$	1.6	4.1	6.6	mcd
Peak Wavelength	$\lambda_P$	$I_F = 5\text{mA}$	-	700	-	nm
Spectrum Bandwidth	$\Delta\lambda$	$I_F = 5\text{mA}$	-	100	-	nm
Reverse Current	$I_R$	$V_R = 4\text{V}$	-	-	10	uA
*4Half angle	$\theta_{1/2}$	$I_F = 5\text{mA}$	-	±25	-	deg

\*3. Luminous Intensity Maximum tolerance for each Grade Classification limit is ±18%

\*3. Luminous Intensity classification

C	D	E
1.6~6.6	2.6~4.1	4.1~6.6

\*4.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the peak intensity

Characteristic Diagrams

Fig. 1  $I_F - V_F$

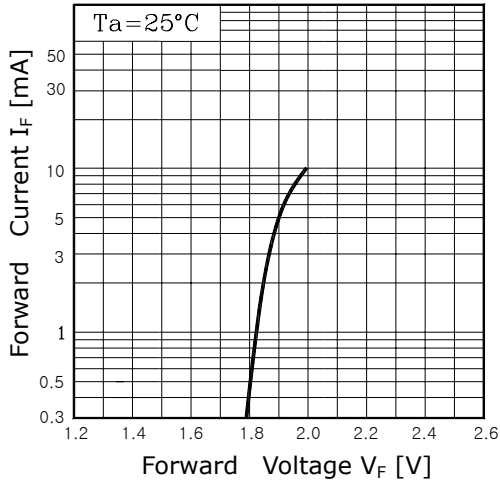


Fig. 2  $I_V - I_F$

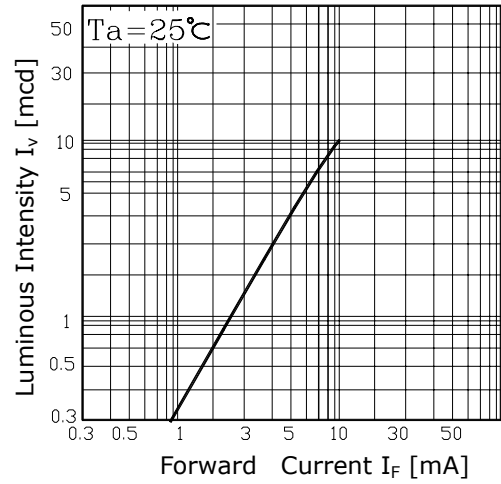


Fig. 3  $I_F - T_a$

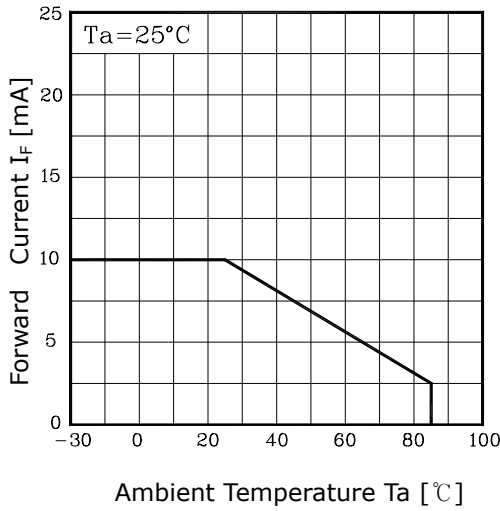


Fig. 4 Spectrum Distribution

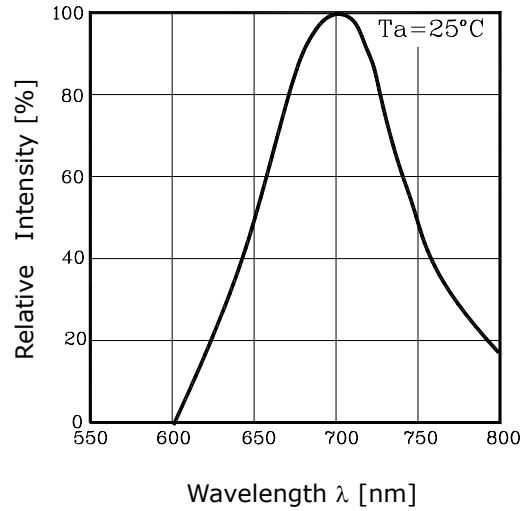


Fig. 5 Radiation Diagram

