

TRIAC(Through Hole / Isolated)**TMG10C60F**

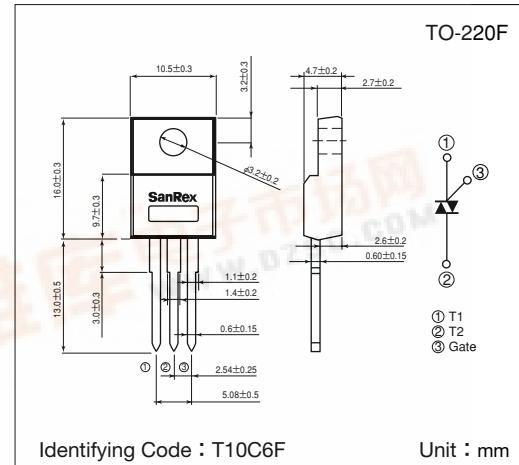
SanRex Triac TMG10C60F is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_{T(RMS)}=10A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

**■ Maximum Ratings**(T_j=25°C unless otherwise specified)

| Symbol | Item | Reference | Ratings | | Unit |
|---------------------|--------------------------------------|---|----------|--|------|
| V _{DRM} | Repetitive Peak Off-State Voltage | | 600 | | V |
| I _{T(RMS)} | R.M.S. On-State Current | T _c =83°C | 10 | | A |
| I _{TSM} | Surge On-State Current | One cycle, 50Hz/60Hz, Peak value non-repetitive | 100/110 | | A |
| I ^t | I ^t (for fusing) | | 50 | | A°S |
| P _{GM} | Peak Gate Power Dissipation | | 5 | | W |
| P _{G(AV)} | Average Gate Power Dissipation | | 0.5 | | W |
| I _{GM} | Peak Gate Current | | 2 | | A |
| V _{GM} | Peak Gate Voltage | | 10 | | V |
| V _{ISO} | Isolation Breakdown Voltage (R.M.S.) | A.C. 1 minute | 1500 | | V |
| T _j | Operating Junction Temperature | | -40~+125 | | °C |
| T _{STG} | Storage Temperature | | -40~+150 | | °C |
| | Mass | | 2 | | g |

■ Electrical Characteristics

| Symbol | Item | Reference | Ratings | | | Unit |
|------------------------------------|---|--|---------|------|------|------|
| | | | Min. | Typ. | Max. | |
| I _{DRM} | Repetitive Peak Off-State Current | V _D =V _{DRM} , Single phase, half wave, T _j =125°C | | | 2 | mA |
| V _{TM} | Peak On-State Voltage | I _T =15A, Inst. measurement | | | 1.4 | V |
| I _{GT1} ⁺ 1 | Gate Trigger Current | V _D =6V, R _L =10Ω | | | 30 | mA |
| I _{GT1} ⁻ 2 | | | | | 30 | |
| I _{GT3} ⁺ 3 | | | | | — | |
| I _{GT3} ⁻ 4 | | | | | 30 | |
| V _{GT1} ⁺ 1 | Gate Trigger Voltage | | | | 1.5 | V |
| V _{GT1} ⁻ 2 | | | | | 1.5 | |
| V _{GT3} ⁺ 3 | | | | | — | |
| V _{GT3} ⁻ 4 | | | | | 1.5 | |
| V _{GD} | Non-Trigger Gate Voltage | T _j =125°C, V _D =1/2V _{DRM} | 0.2 | | | V |
| [dv/dt] _C | Critical Rate of Rise of Off-State Voltage at Commutation | T _j =125°C, [di/dt] _C =-5A/ms, V _D =2/3V _{DRM} | 10 | | | V/μs |
| I _H | Holding Current | | | 20 | | mA |
| R _{th} | Thermal Resistance | Junction to case | | | 3.5 | °C/W |

Trigger mode of the triac

