

TRIAC(Through Hole/Non-isolated)

TMG5C60C


SanRex Triac **TMG5C60C** is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_{T(RMS)}=5A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

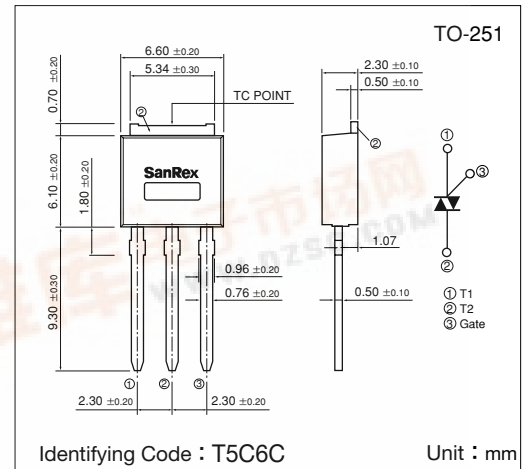

Maximum Ratings





(T_j=25°C unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V _{DRM}	Repetitive Peak Off-State Voltage		600	V
I _{T(RMS)}	R.M.S. On-State Current	T _c =107°C	5	A
I _{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	50/55	A
I ² t	I ² t (for fusing)		12.6	A ² S
P _{GM}	Peak Gate Power Dissipation		3	W
P _{G(AV)}	Average Gate Power Dissipation		0.3	W
I _{GM}	Peak Gate Current		2	A
V _{GM}	Peak Gate Voltage		10	V
T _j	Operating Junction Temperature		-40~+125	°C
T _{stg}	Storage Temperature		-40~+150	°C
	Mass		0.39	g

Electrical Characteristics


Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
IDRM	Repetitive Peak Off-State Current	$V_D=V_{DRM}$, Single phase, half wave, $T_J=125^{\circ}\text{C}$			1	mA
VTM	Peak On-State Voltage	$I_T=7\text{A}$, Inst. measurement			1.4	V
I_{GT1}^{+}	Gate Trigger Current	$V_D=6\text{V}$, $R_L=10\Omega$			20	mA
I_{GT1}^{-}					20	
I_{GT3}^{+}					—	
I_{GT3}^{-}					20	
V_{GT1}^{+}	Gate Trigger Voltage				1.5	V
V_{GT1}^{-}					1.5	
V_{GT3}^{+}					—	
V_{GT3}^{-}					1.5	
VGD	Non-Trigger Gate Voltage	$T_J=125^{\circ}\text{C}$, $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$[\text{d}v/\text{d}t]_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_J=125^{\circ}\text{C}$, $[\text{d}i/\text{d}t]_c=-2.5\text{A/ms}$, $V_D=\frac{2}{3}V_{DRM}$	5			$\text{V}/\mu\text{s}$
IH	Holding Current			10		mA
Rth(j-c)	Thermal Resistance	Junction to case			3.0	$^{\circ}\text{C}/\text{W}$

Trigger mode of the triac




TMG5C60C


Gate Characteristics

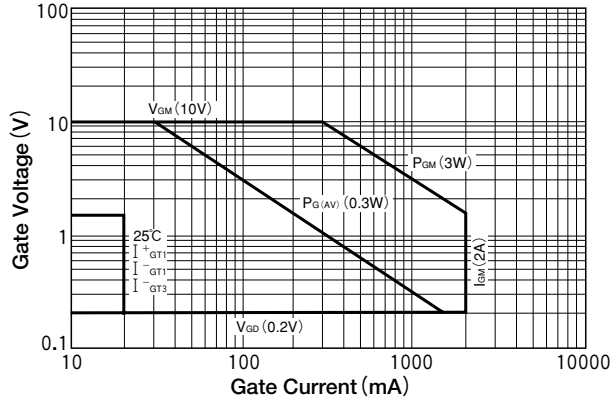


On-State Characteristics (MAX)

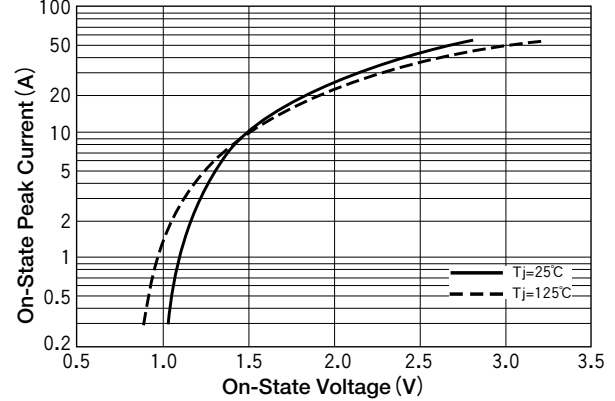


RMS On-State Current vs Maximum Power Dissipation

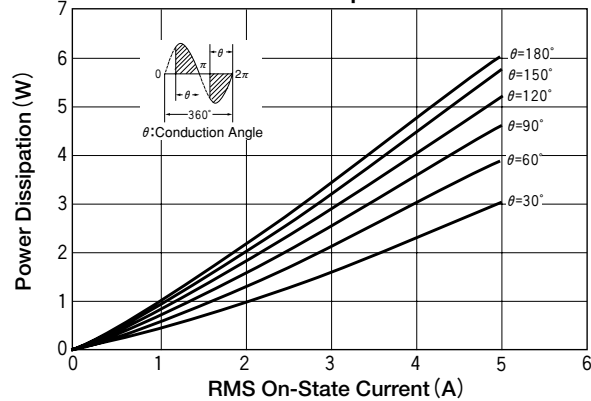


RMS On-State vs Allowable Case Temperature

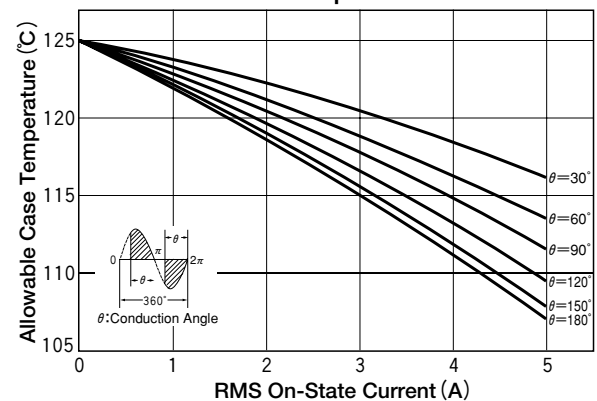


Surge On-State Current Rating (Non-Repetitive)

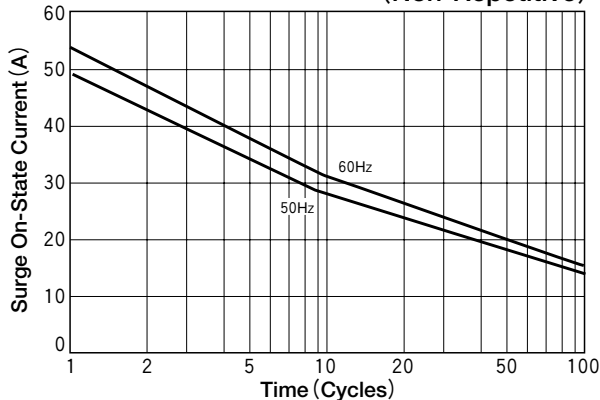

Transient Thermal Impedance

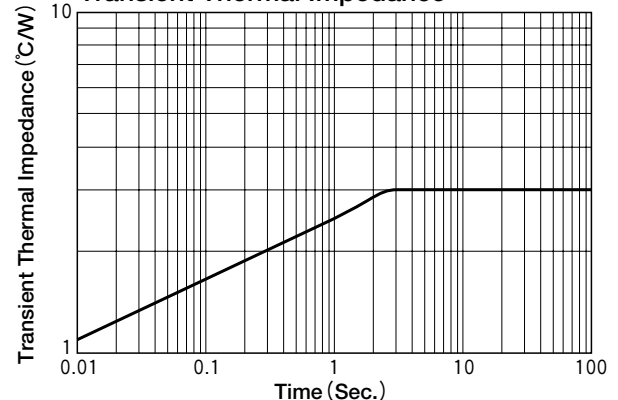

$I_{GT} - T_J$ (Typical)

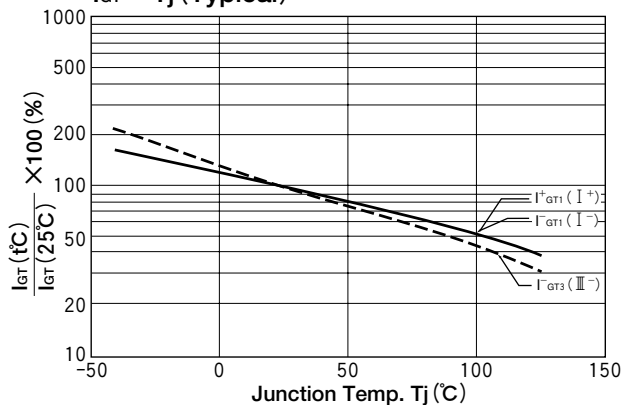

$V_{GT} - T_J$ (Typical)

