

TRIAC(Through Hole / Non-isolated)

TMG5CQ60

(T_j=150℃)


SanRex Triac **TMG5CQ60** is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- I_{T(RMS)}=5A
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

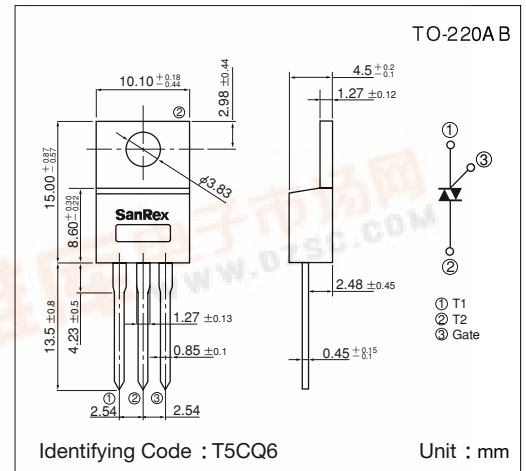

Maximum Ratings





(T_j=25℃ unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V _{DRM}	Repetitive Peak Off-State Voltage		600	V
I _{T(RMS)}	R.M.S. On-State Current	T _c =131℃	5	A
I _{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	50/55	A
I _{pt}	I _{pt} (for fusing)		12.6	A ² S
P _{GM}	Peak Gate Power Dissipation		3	W
P _{G(AV)}	Average Gate Power Dissipation		0.3	W
I _{GM}	Peak Gate Current		2	A
V _{GM}	Peak Gate Voltage		10	V
T _j	Operating Junction Temperature		-40 ~ +150	℃
T _{stg}	Storage Temperature		-40 ~ +150	℃
	Mass		2	g


Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
IDRM	Repetitive Peak Off-State Current	$V_D = V_{DRM}$, Single phase, half wave, $T_j = 150^{\circ}\text{C}$			2	mA	
VTM	Peak On-State Voltage	$I_T = 7\text{A}$, Inst. measurement			1.4	V	
I_{GT1}^{+}	1	$V_D = 6\text{V}$, $R_L = 10\Omega$			20	mA	
I_{GT1}^{-}	2				20		
I_{GT3}^{+}	3				—		
I_{GT3}^{-}	4				20		
V_{GT1}^{+}	1		Gate Trigger Voltage			1.5	V
V_{GT1}^{-}	2					1.5	
V_{GT3}^{+}	3					—	
V_{GT3}^{-}	4					1.5	
VGD	Non-Trigger Gate Voltage	$T_j = 150^{\circ}\text{C}$, $V_D = \frac{1}{2}V_{DRM}$	0.1			V	
(dv/dt)c	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j = 150^{\circ}\text{C}$, $(di/dt)_c = -2.5\text{A/ms}$, $V_D = \frac{2}{3}V_{DRM}$	2			V/ μs	
IH	Holding Current			10		mA	
Rth	Thermal Resistance	Junction to case			3.0	$^{\circ}\text{C/W}$	


Trigger mode of the triac




Gate Characteristics

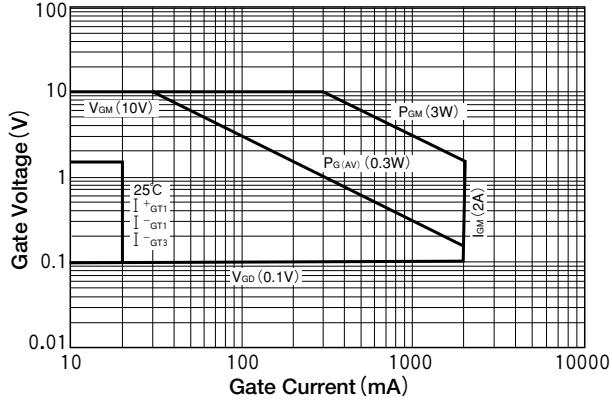


On-State Characteristics (MAX)

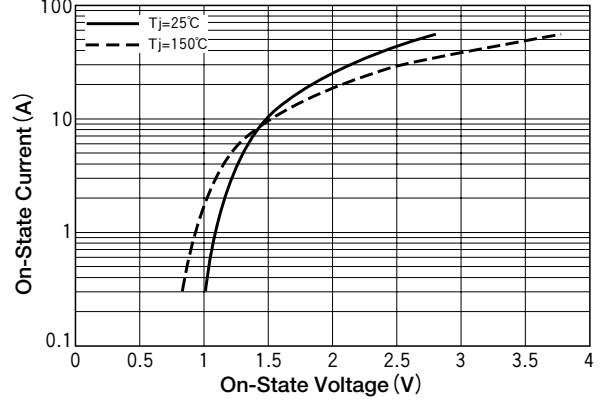


RMS On-State Current vs Maximum Power Dissipation

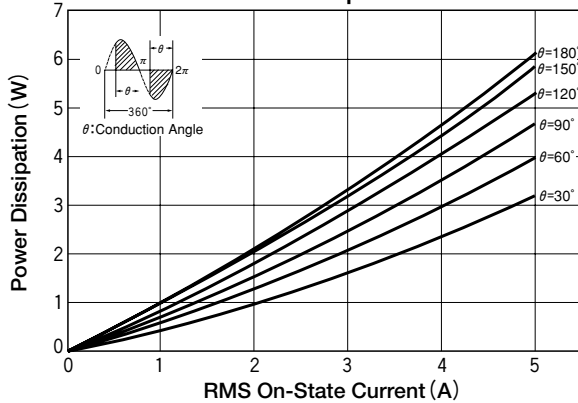


RMS On-State vs Allowable Case Temperature

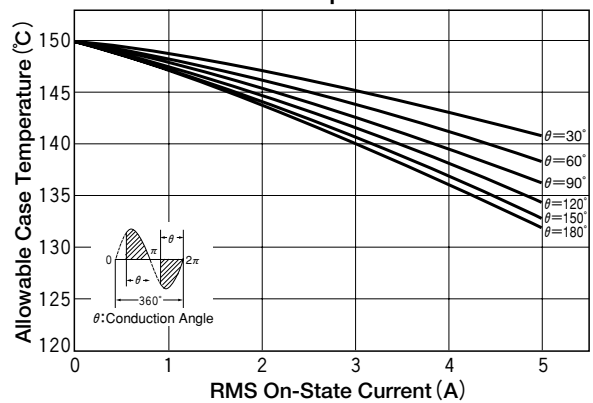


Surge On-State Current Rating (Non-Repetitive)

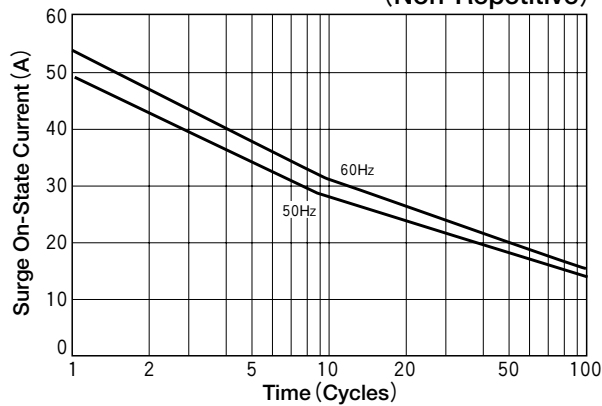

Transient Thermal Impedance

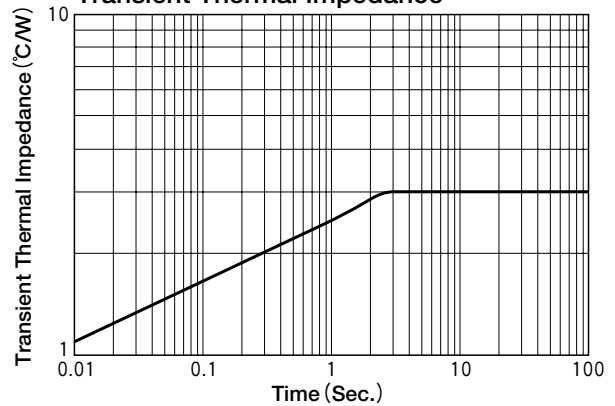

$I_{GT} - T_J$ (Typical)

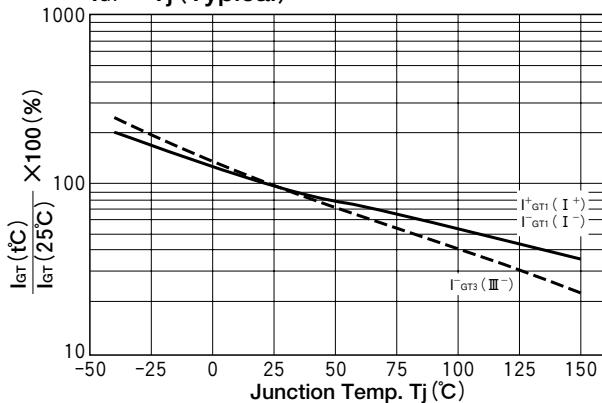

$V_{GT} - T_J$ (Typical)

