

IXYS

UGE 3126 AY4

High Voltage Rectifiers

$$V_{RRM} = 24000 \text{ V}$$

$$I_{F(AV)M} = 2.0 \text{ A}$$

V_{RRM} V	Standard Types	Power Designation
24000	UGE 3126 AY4	Si-E 9000 / 4000-0.7



Symbol	Conditions	Ratings
$I_{F(RMS)}$ $I_{F(AV)M}$	air self cooling, $T_{amb} = 45^{\circ}\text{C}$ - without cooling plate - with colling plate	5 A 0.8 A 1.0 A
	forced air cooling: $v = 3 \text{ m/s}$, $T_{amb} = 35^{\circ}\text{C}$ - without cooling plate - with cooling plate	1.4 A 1.7 A
	oil cooling, $T_{amb} = 35^{\circ}\text{C}$ - without cooling plate - with cooling plate	2.0 A 2.0 A
P_{RSM}	$T_{(vj)} = 150^{\circ}\text{C}$; $t_p = 10 \mu\text{s}$	1.6 kW
I_{FSM}	non repetitive, 50 c/s (for 60 c/s add 10%) $T_{(vj)} = 45^{\circ}\text{C}$; $t_p = 10 \text{ ms}$	70 A
	$T_{(vj)} = 150^{\circ}\text{C}$; $t_p = 10 \text{ ms}$	60 A
T_{amb}		-40...+150 $^{\circ}\text{C}$
T_{stg}		-40...+150 $^{\circ}\text{C}$
$T_{(vj)}$		150 $^{\circ}\text{C}$
Weight		127 g

Features

- Hermetically sealed Epoxy
- Use in oil
- Avalanche characteristics

Applications


- X-Ray equipment
- Electrostatic dust precipitators
- Electronic beam welding
- Lasers
- Cable test equipment

Advantages

- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits
- Series and parallel operation

Symbol	Conditions	Characteristic Values
I_R	$T_{(vj)} = 150^{\circ}\text{C}$; $V_R = V_{RRM}$	$\leq 1 \text{ mA}$
V_F	$I_F = 3 \text{ A}$ $T_{(vj)} = 25^{\circ}\text{C}$	18 V
V_{TO}	$T_{(vj)} = 150^{\circ}\text{C}$	12 V
r_T	$T_{(vj)} = 150^{\circ}\text{C}$	1.8 Ω
a	$f = 50 \text{ Hz}$	5 x 9,81 m/s^2
M_d		8 Nm

Dimensions in mm (1 mm = 0.0394")

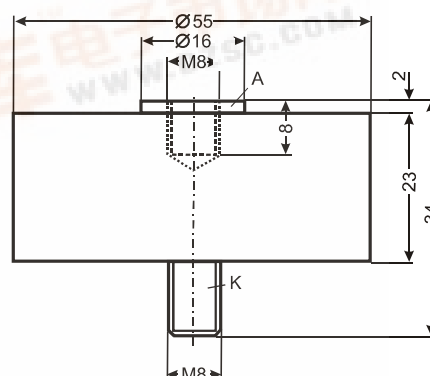

Data according to IEC 60747-2

IXYS reserve the right to change limits, test conditions and dimensions.



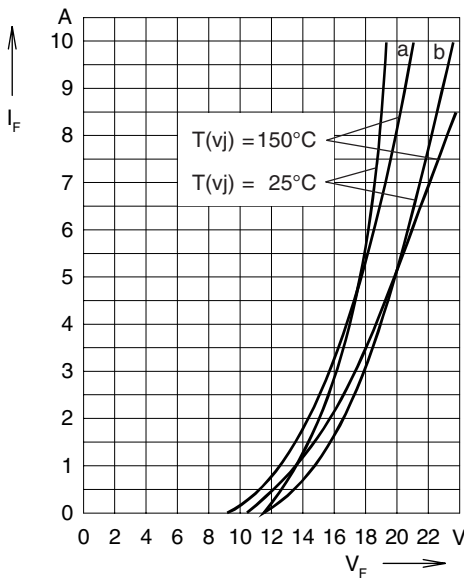


Fig. 1: Forward characteristics

Instantaneous forward current I_F as a function of instantaneous forward voltage drop V_F for junction temperature $T_{(vj)} = 25^\circ\text{C}$ and $T_{(vj)} = 150^\circ\text{C}$
 a = Mean value characteristic
 b = Limit value characteristic

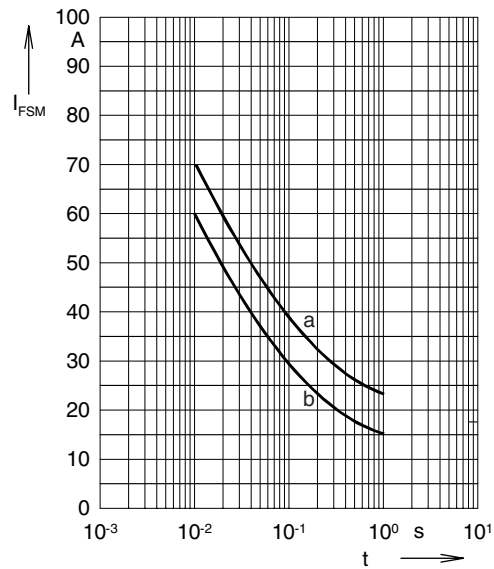


Fig. 2: Characteristics of maximum permissible current

The curves show the non repetitive peak one cycle surge forward current I_{FSM} as a function of time t and serve for rating protective devices.

a = Initial state $T_{(vj)} = 45^\circ\text{C}$
 b = Initial state $T_{(vj)} = 150^\circ\text{C}$

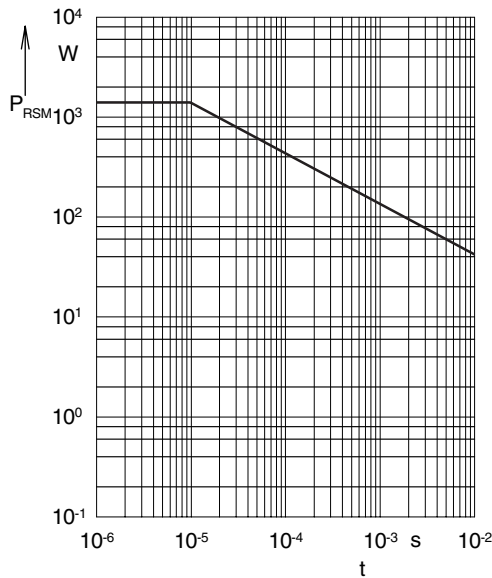


Fig. 3: Power loss

Non repetitive peak reverse power loss P_{RSM} as a function of time t , $T_{(vj)} = 150^\circ\text{C}$

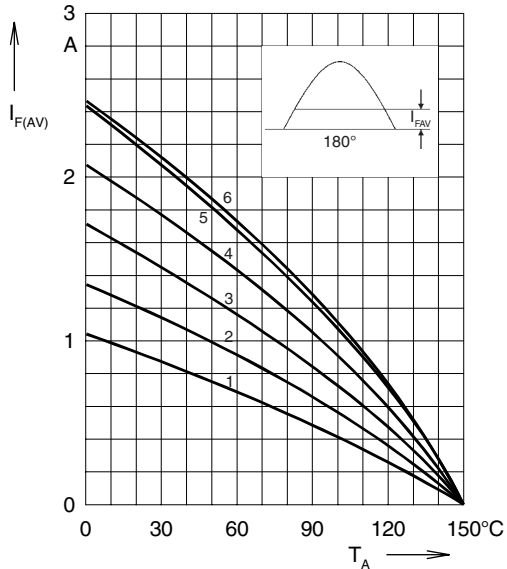


Fig. 4: Load diagram

Mean forward current $I_{F(AV)}$ of one module for a sine half wave for various cooling modes as a function of the cooling medium temperature T_{amb} for a resistive load (horizontal mounting).

Cooling modes

1 = air self cooling	without	cooling plate
2 = air self cooling	with	cooling plate
3 = forced air cooling	without	cooling plate
4 = forced air cooling	with	cooling plate
5 = oil cooling	without	cooling plate
6 = oil cooling	with	cooling plate