


## 122 x 32 Graphic LCD

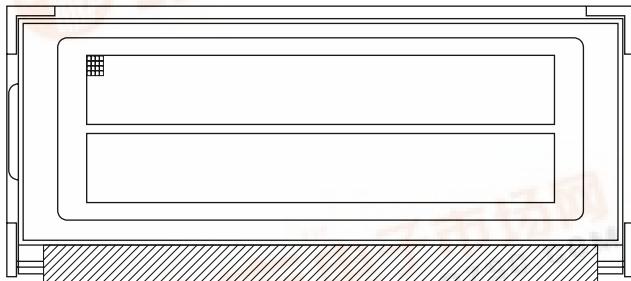

## FEATURES

- Type: Graphic
- Display format: 122 x 32 dots
- Built-in controller: ST7920
- Duty cycle: 1/32
- + 5 V power supply
- Chinese version
- Same size with LCD-122H032B
- Compliant to RoHS directive 2002/95/EC

RoHS  
COMPLIANT

MECHANICAL DATA		
ITEM	STANDARD VALUE	UNIT
Module Dimension	59.0 x 29.3 x 5.5	mm
Viewing Area	52.0 x 15.0	
Dot Size	0.345 x 0.345	
Dot Pitch	0.375 x 0.375	
Mounting Hole	N/a	
Character Size	N/a	

ABSOLUTE MAXIMUM RATINGS					
ITEM	SYMBOL	STANDARD VALUE			UNIT
		MIN.	TYP.	MAX.	
Power Supply	$V_{DD}$ to $V_{SS}$	4.75	5.0	5.25	V
Input Voltage	$V_I$	0	-	$V_{DD}$	

## Note

- $V_{SS} = 0$  V,  $V_{DD} = 5.0$  V

ITEM	SYMBOL	CONDITION	STANDARD VALUE			UNIT
			MIN.	TYP.	MAX.	
Input Voltage	$V_{DD}$	-	4.5	5.0	5.5	V
Supply Current	$I_{DD}$	$V_{DD} = +5$ V	0.8	1.0	1.2	mA
Recommended LC Driving Voltage for Normal Temperature Version Module	$V_{DD}$ to $V_0$	-20 °C	-	-	5.3	V
		25 °C	-	4.8	-	
		70 °C	4.2	-	-	
CCFL Starting Voltage	$V_{FLS}$	25 °C	-	-	-	$V_{RMS}$
CCFL Driving Voltage	$V_{FLD}$	25 °C	-	-	-	$V_{RMS}$
CCFL Driving Current	$I_{FLD}$	$V_{FQ} = 450$ $V_{RMS}$ , 30 kHz	-	-	-	$mA_{RMS}$
LED Forward Voltage	$V_F$	25 °C	2.0	2.1	2.3	V
LED Forward Current	$I_F$	25 °C	80	100	130	mA
EL Power Supply Current	$I_{EF}$	$V_{EL} = 110$ V <sub>AC</sub> , 400 Hz	-	-	5.0	mA


OPTIONS						BACKLIGHT			
TN	STN Gray	STN Yellow	STN Blue	FSTN B&W	STN Color	None	LED	EL	CCFL
	x	x		x		x			

For detailed information, please see the "Product Numbering System" document.

## INTERFACE PIN FUNCTION

PIN NO.	SYMBOL	FUNCTION
1	$V_{DD}$	Power supply (+ 3 V, + 5 V)
2	$V_{SS}$	Ground
3	$V_0$	Contrast adjustment
4	$\overline{RES}$	L: Reset the LCM
5	E	Enable
6	$V_{OUT}$	Positive voltage output
7	R/W	H: Read data/L: Write data
8	RS	H/L register select signal
9	DB0	Data bus line
10	DB1	Data bus line
11	DB2	Data bus line
12	DB3	Data bus line
13	DB4	Data bus line
14	DB5	Data bus line
15	DB6	Data bus line
16	DB7	Data bus line
17	A	+ 2.1 V for LED
18	K	Power supply for B/L (0 V)

## **DIMENSIONS** in millimeters

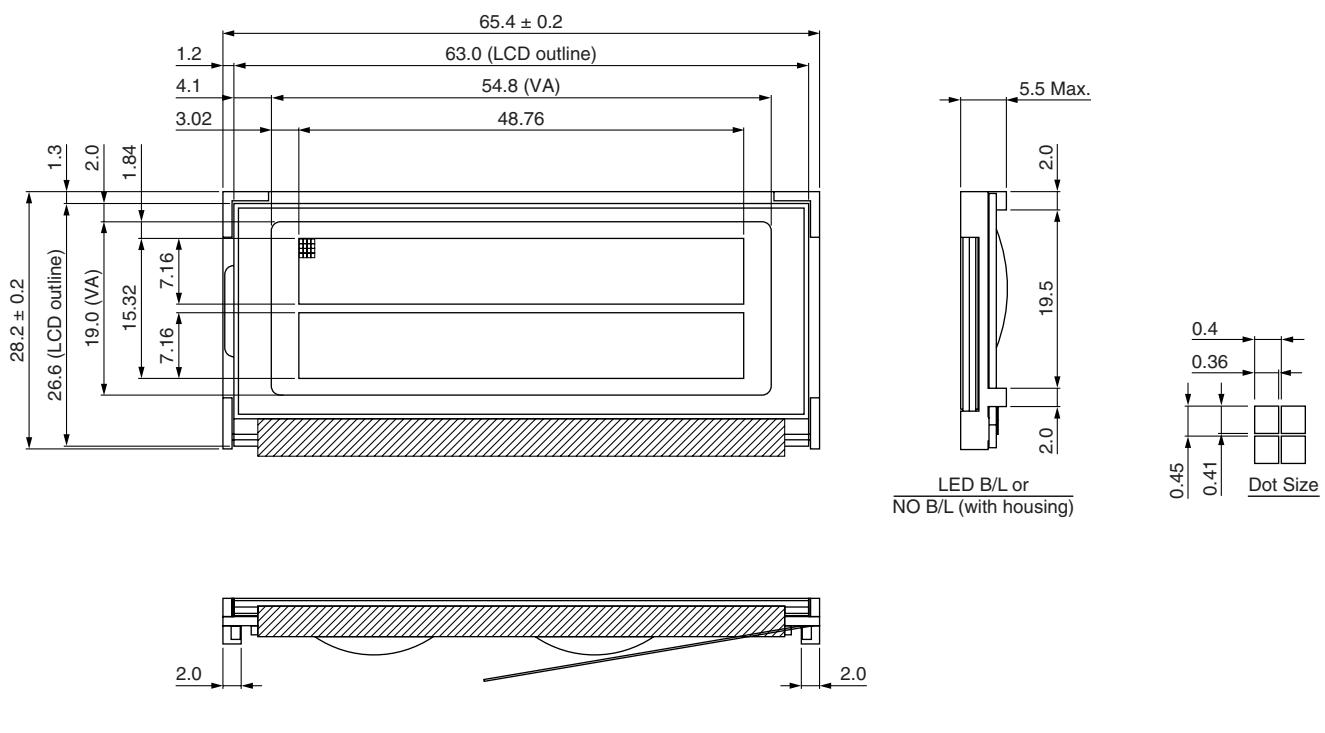

## **Disclaimer**

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.