


SAW Bandpass Filter 201315B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

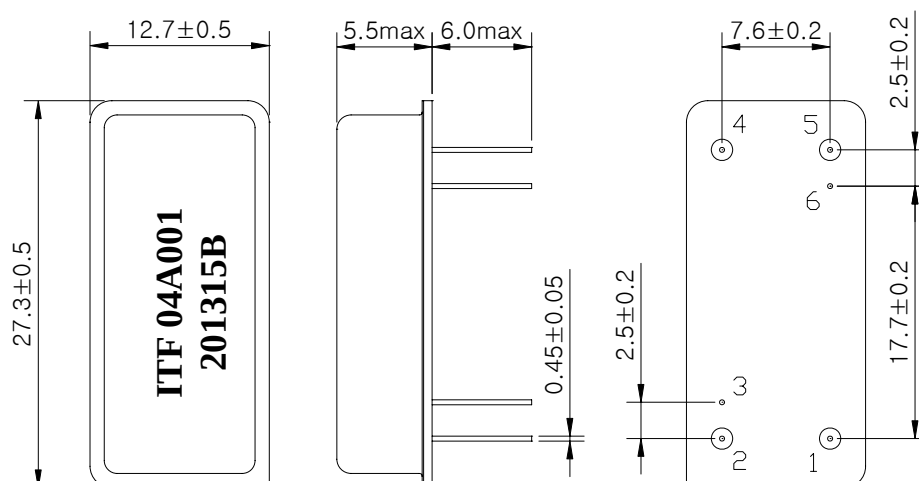

Package : D2712

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration

1	Input
5	Output
2, 4	Ground
3, 6	Case ground



ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.	201315B	
Rev. Date	2004-03-31	
Rev.	NW3017-C02	1/5

SAW Bandpass Filter 201315B

3. Specifications

Fo = 140 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	140.0	-
Insertion Loss	dB	-	23.0	25.0
1dB Bandwidth	MHz	-	3.62	-
3dB Bandwidth	MHz	3.8	3.9	4.2
40dB Bandwidth	MHz	-	4.94	5.2
Amplitude Ripple (Fo +/- 1.65 MHz)	dB	-	0.6	0.9
Group Delay Variation (Fo +/- 1.65 MHz)	nsec	-	120	180
Absolute Delay	usec	-	2.52	-
Ultimate Rejection	dB	45	50	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201315B	
		Rev. Date	2004-03-31	
		Rev.	NW3017-C02	2/5

SAW Bandpass Filter 201315B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

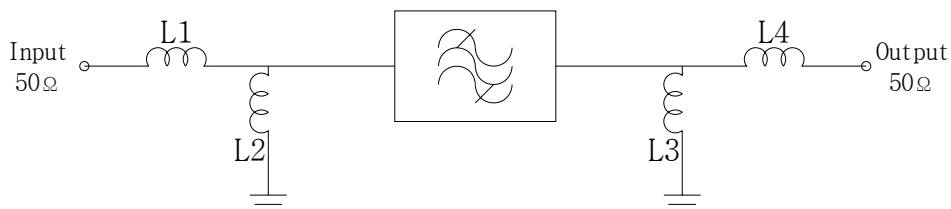

L1 = 100 nH, L4 = 150 nH
L2 = 180 nH L3 = 180 nH

5. Marking Configuration

ITF¹⁾ 04A001²⁾
201315B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201315B	
		Rev. Date	2004-03-31	
		Rev.	NW3017-C02	3/5

SAW Bandpass Filter 201315B




6. Typical Performance (at +25℃)

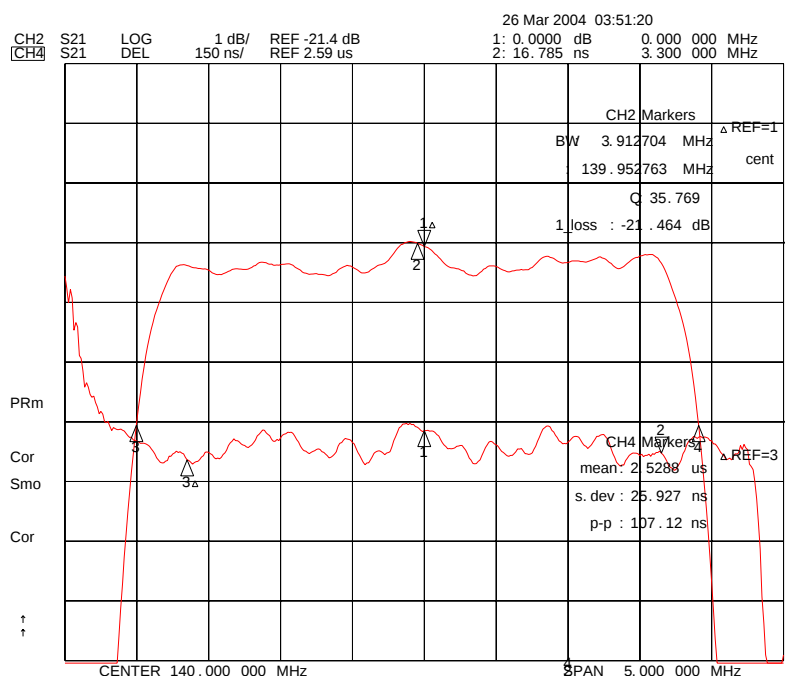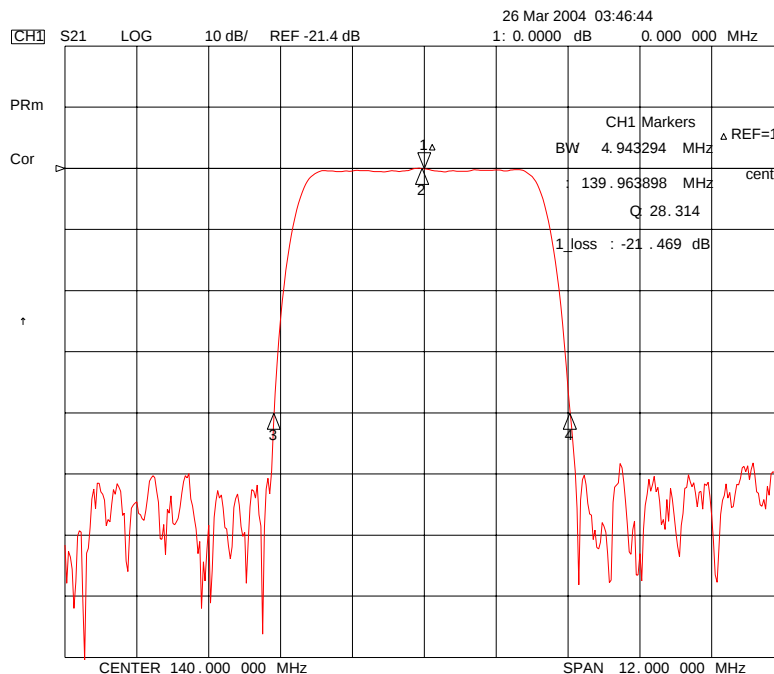

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201315B	
		Rev. Date	2004-03-31	
		Rev.	NW3017-C02	4/5

SAW Bandpass Filter 201315B

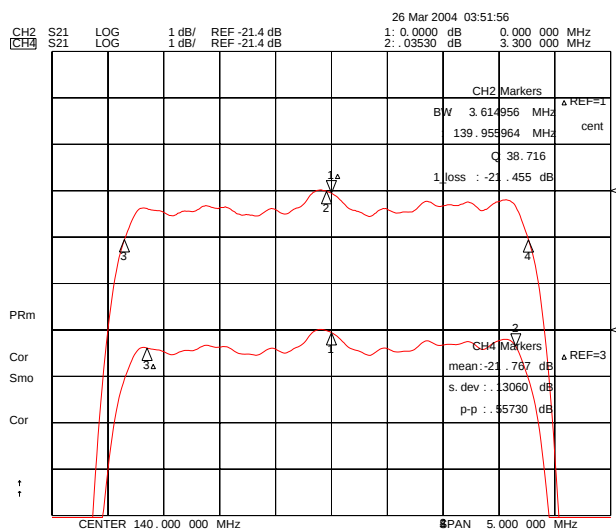

C

