
Pomona.

Model 6245

Minigrabber® Test Clip to Straight Sheathed Banana Plug

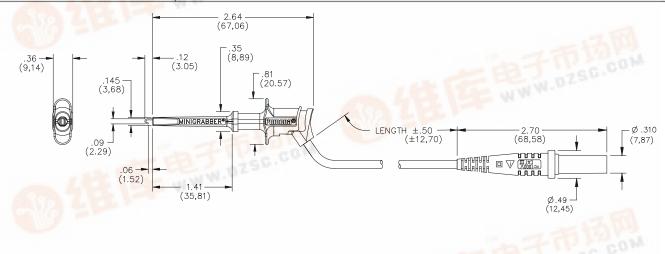

Features

- Newly designed Minigrabber® Test Clip Patch Cord complies with IEC 61010-2-31, which is the latest international safety standard for test accessories.
- Grabber width is a slim .36" (9,14 mm) for easier side by side stacking.
- Grabber hook is gold plated Beryllium Copper to ensure signal integrity.
- Grabber hook attaches onto component leads up to .060" (1,5 mm) O.D.
- Grabber patch cord interfaces directly into the most popular multimeters configured with 4 mm sheathed safety jacks including Amprobe, Fluke, H.P., Tektronix and Wavetek.
- Plug is molded directly to the cable in an integral one-piece design and the wire is double crimped for a long lasting connection.
- Multi-leaf banana spring material is nickel plated Beryllium Copper for extended insertion life and low contact resistance.
- High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.

Materials

Grabber: Body: Polypropylene, Color per Part Number Hook: Beryllium Copper, Gold Plated, compression Spring: Music Wire Wire: 18 AWG, 65 x 36 Tinned Copper, Insulation – Silicone, .144" (3,66 mm) O.D., Color per P/N Banana Plug: Body – Brass, Nickel Plated, Spring – Beryllium Copper, Nickel Plated Insulation – Polypropylene, Color per P/N

Ratings

IEC 61010 2-031, Category II, P2 Compliant Operating Voltage: 300 VRMS/DC Max. Current: 5 Amperes Max.

Ordering Information

df.dzsc.com

Model 6245-XX-* XX = Length in Inches, Standard Length: 48" (122 cm) * = Color Code, -0 Black, -2 Red

USA: Sales: 800-490-2361 Technical Support: technicalsupport@pomonatest.com Fax: 425-446-5844 Furope: 31-(0) 49 2675 150 International: 425-446-5500 Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.