


5mm TYPE 5K

Frequency Range: 30-150MHz  
 Inductance Range: 0.08-1.0μH  
 Temperature Coefficient: 220±150ppm/°C

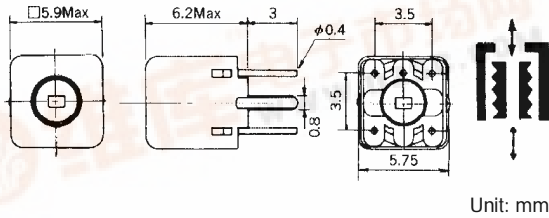


Features

- The dual, closely spaced slots on the bobbin produces high Q, tight tolerances, stable winding impedance, low distributed capacitance, and added stability in humid conditions.

5mm TYPE 5KM

Frequency Range: 30-150MHz  
 Inductance Range: 0.05-10μH  
 Temperature Coefficient: TC (L) 80±120ppm/°C  
 TC (F) 0±120ppm/°C  
 Internal Capacitance Value: 5-56pF

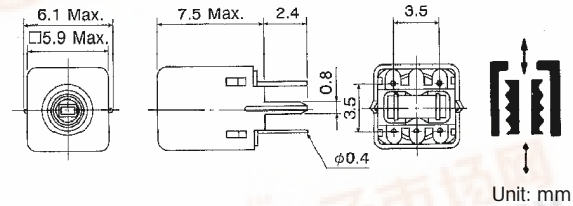

Features

- Available with internal capacitor.
- Spiral wound with high number of closely spaced slots on form, to yields low distributed capacitance, low temperature coefficient, and added stability in humid conditions.

STANDARD COILS SELECTION GUIDE

TYPE 5K			
TOKO Part Number	Inductance Range (μH)	Q (min.)	Test Frequency (MHz)
294SN-T1008Z	0.08±2%	45	75.0
294SN-T1009Z	0.10±6%	45	75.0
294SN-T1010Z	0.15±6%	45	75.0
294SN-T1011Z	0.22±6%	45	45.0
294SN-T1012Z	0.33±6%	45	45.0
294SN-T1013Z	0.47±6%	45	45.0
294SN-T1014Z	0.68±6%	45	45.0
294SN-T1015Z	1.00±6%	45	30.0

STANDARD COILS SELECTION GUIDE

TYPE 5KM			
TOKO Part Number	Inductance Range (μH)	Q (min.)	Test Frequency (MHz)
369SNS-1646Z	0.10±5%	35	50
369SNS-1647Z	0.12±5%	35	50
369SNS-1648Z	0.15±5%	35	50
369SNS-1649Z	0.18±6%	35	50
369SNS-1650Z	0.22±6%	35	50
369SNS-1651Z	0.27±6%	35	50
369SNS-1652Z	0.33±6%	35	50
369SNS-1653Z	0.39±6%	35	50
369SNS-1654Z	0.47±6%	35	50
369SNS-1655Z	0.56±6%	35	50
369SNS-1656Z	0.68±6%	35	50
369SNS-1657Z	0.82±6%	35	50
369SNS-1658Z	1.00±6%	25	7.96
369SNS-1659Z	1.20±6%	25	7.96
369SNS-1660Z	1.50±6%	25	7.96
369SNS-1661Z	1.80±5%	25	7.96
369SNS-1662Z	2.20±5%	25	7.96
369SNS-1663Z	2.70±5%	25	7.96
369SNS-1664Z	3.30±6%	25	7.96
369SNS-1665Z	3.90±6%	25	7.96
369SNS-1666Z	4.70±6%	25	7.96
369SNS-1667Z	5.60±5%	25	7.96
369SNS-1668Z	6.80±5%	25	7.96
369SNS-1676Z	8.20±5%	25	7.96
369SNS-1677Z	10.00±3%	25	7.96