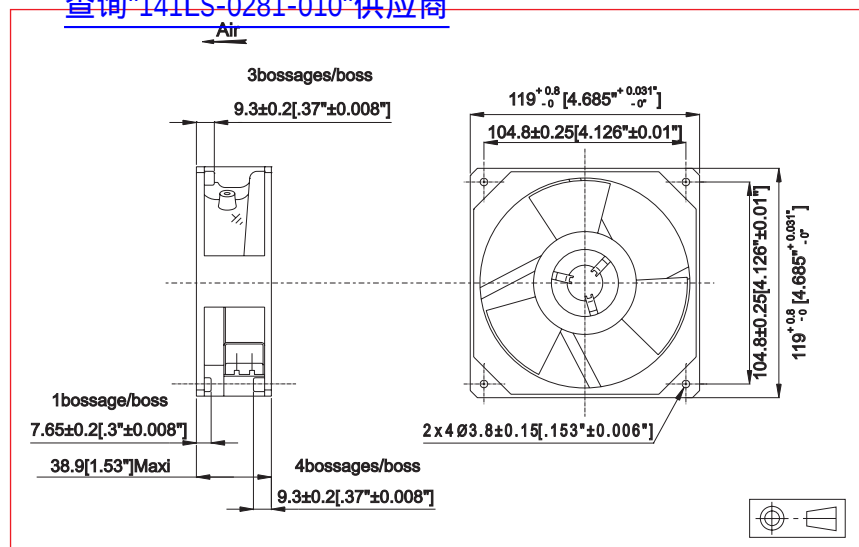


4,724" x 4,724" x 1,496"

120 x 120 x 38 mm

Series
141L**ETRI®**

AC Axial Fans

[查询"141LS-0281-010"供应商](#)

Approvals



AC Motor


Electrical protection: impedance protected
 Housing material: zamak
 Impeller material: plastic UL 94 VO
 Weight: 725 g
 Bearing system: ball bearings

Available with:

- Flying leads
- Speed sensor

Life expectancy

L-10 LIFE AT 40°C:
 80 000 hours

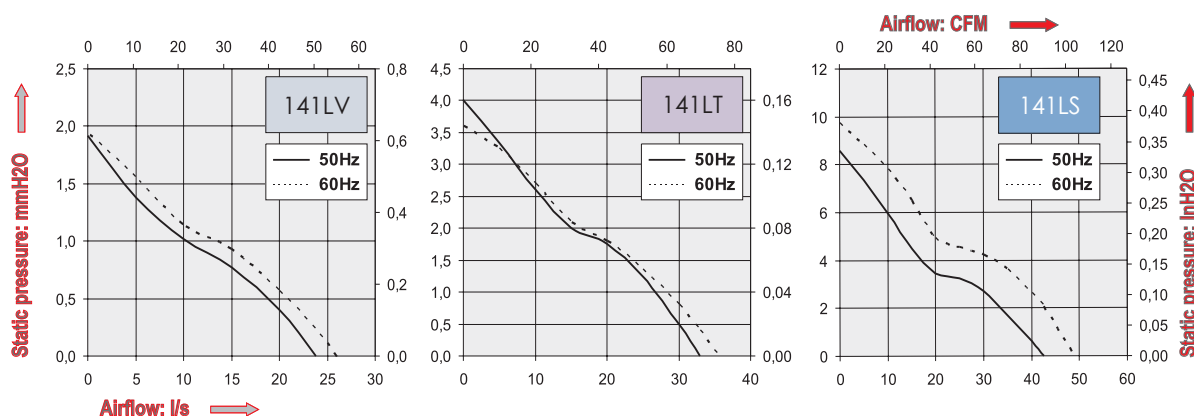

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Frequency	Phases	Capacitor	Input Power	Nominal current	Starting current	Connection type		Operating temperature	
	V	l/s	dB(A)	RPM	Hz		µF	W	mA	mA	Leads	Terminals	Min.°C	Max.°C
141LV-0282-010	115	23,5	27,5	1600	50	1		9	110	125		X	-10	70
		26	28	1700	60	1		8	100	110		X	-10	70
141LV-0281-010	208-240	23,5	27,5	1600	50	1		10	60	70		X	-10	70
		26	28	1700	60	1		9	55	65		X	-10	70
141LT-0282-010	115	33	35	2200	50	1		10	125	160		X	-10	70
		35	38,5	2400	60	1		9	110	140		X	-10	70
141LT-0281-010	208-240	33	35	2200	50	1		12	75	90		X	-10	70
		35	38,5	2400	60	1		10	65	75		X	-10	70
141LS-0282-010	115	42	44,5	2800	50	1		13	160	275		X	-10	70
		48	49,5	3200	60	1		12	140	240		X	-10	70
141LS-0281-010	208-240	42	44,5	2800	50	1		14	95	150		X	-10	70
		48	49,5	3200	60	1		12	80	130		X	-10	70

Additional versions:

Salt spray protected - shock and vibration protected - marine specifications - wide temperature range
 IP54: consult factory

Accessories:

Refer to Accessories leaflet