


SAW Bandpass Filter 204356B



1. Features

- IF Bandpass Filter
- Low-Loss Filter
- Single-Ended Operation
- Ceramic Surface Mount Device (SMD) Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimensions

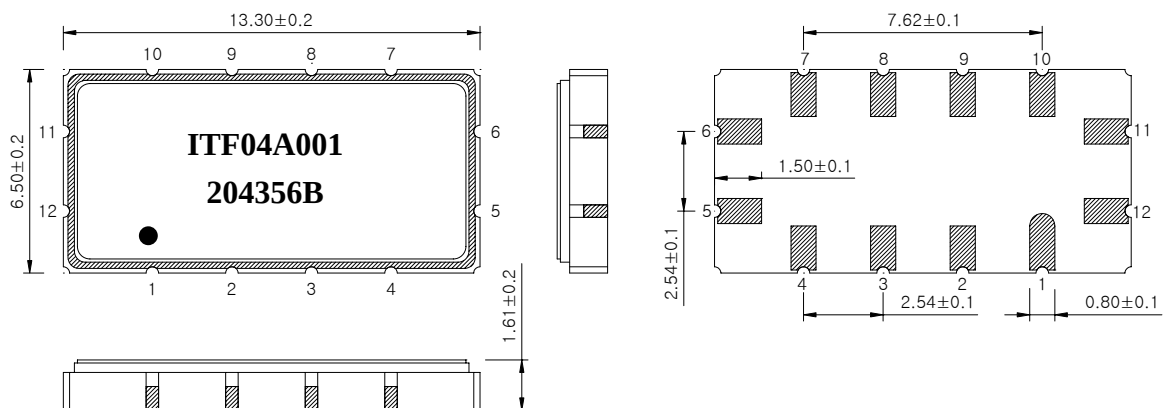

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Pad Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	204356B	
		Rev. Date	2004-04-28	
		Rev.	NJ3006-CS02	1/5

SAW Bandpass Filter 204356B

3. Specifications

Fo = 140.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	139.6	140.0	140.4
Insertion Loss	dB	-	11.0	13.0
1dB Bandwidth	MHz	-	22.9	-
3dB Bandwidth	MHz	23.9	24.1	-
40dB Bandwidth	MHz	-	28.5	30.5
Amplitude Ripple (Fo +/- 10.0 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 10.0 MHz)	nsec	-	30	80
Absolute Delay	usec	-	0.8	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C	-	-86	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	204356B	
		Rev. Date	2004-04-28	
		Rev.	NJ3006-CS02	2/5

SAW Bandpass Filter 204356B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

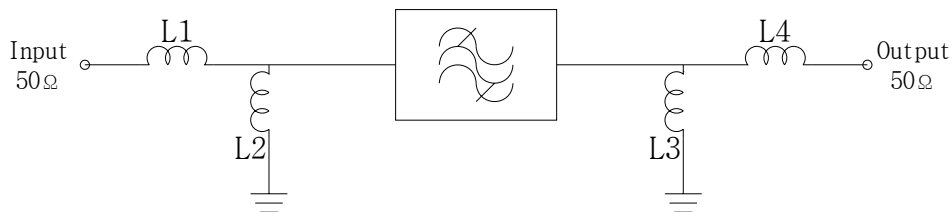

L1 = 22 nH,

L4 = 22 nH

L2 = 33 nH,

L3 = 22 nH

5. Marking Configuration

ITF¹⁾ 04A001²⁾

204356B³⁾

● ⁴⁾

1) Manufacturer name

2) Lot Number

3) Part Number



4) Pad Number 1 Index

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	204356B	
		Rev. Date	2004-04-28	
		Rev.	NJ3006-CS02	3/5

SAW Bandpass Filter 204356B



6. Typical Performance (at +25℃)

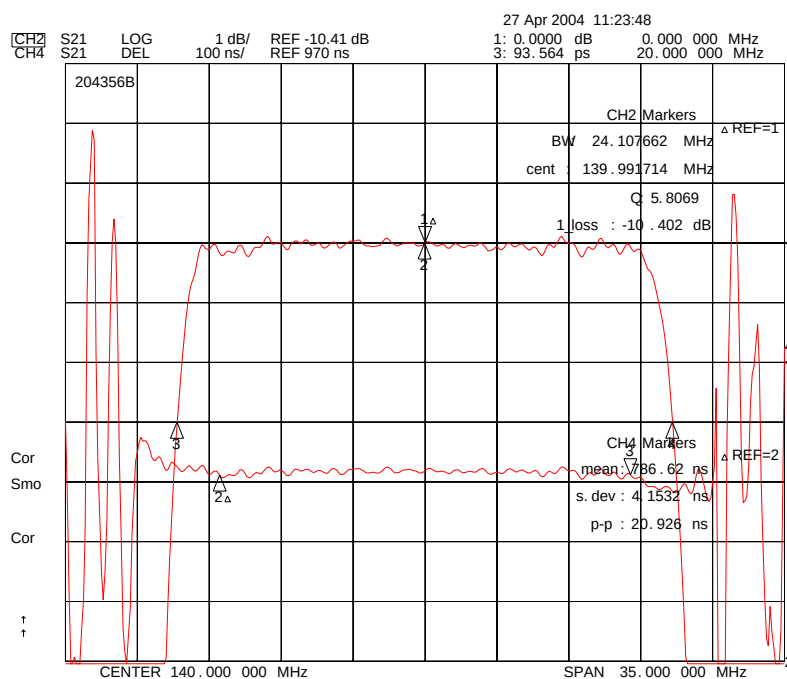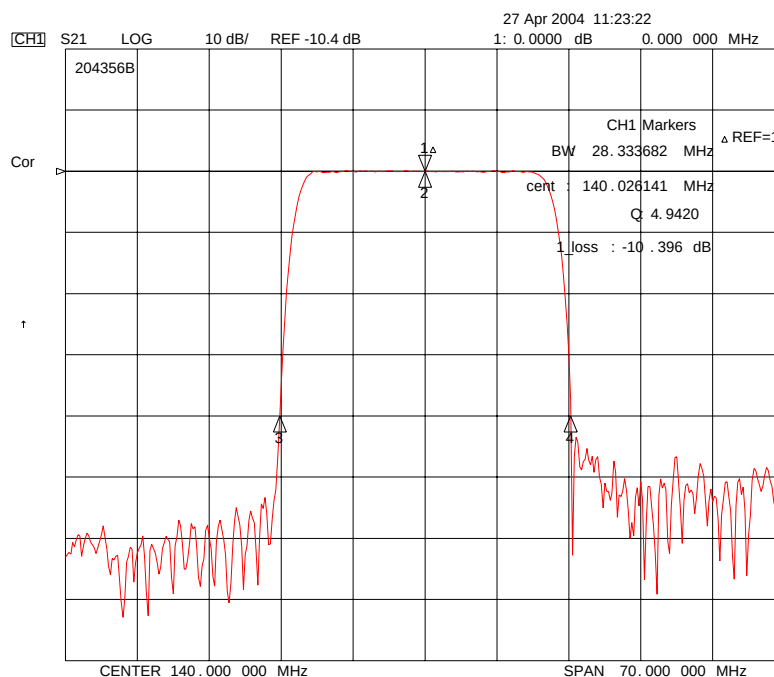

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

204356B

Rev. Date





2004-04-28

Rev.

NJ3006-CS02

4/5

SAW Bandpass Filter 204356B

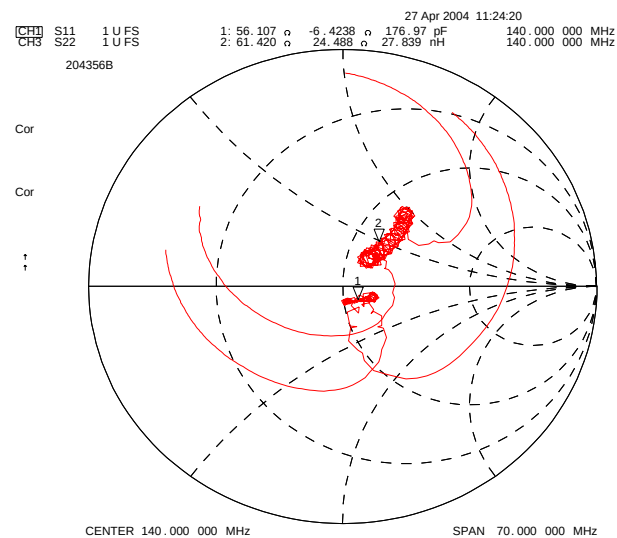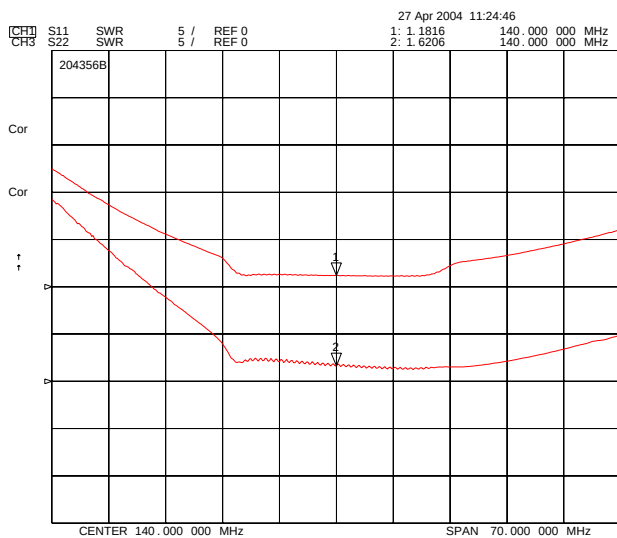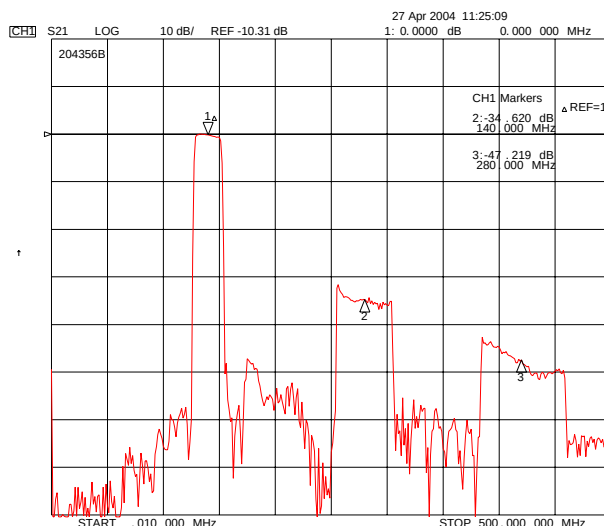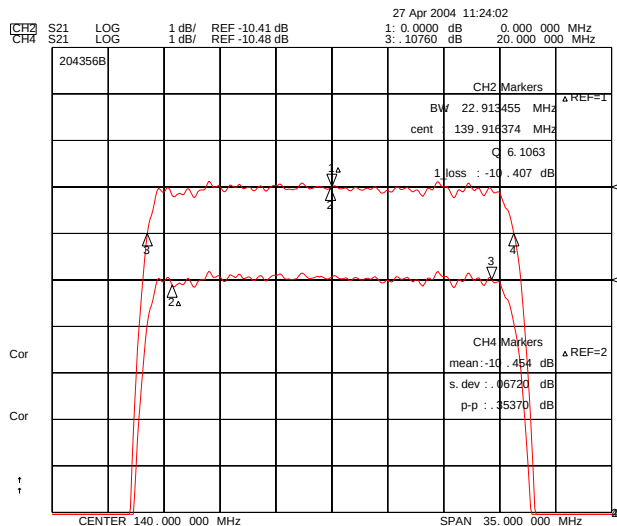

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

204356B

Rev. Date

2004-04-28

Rev.

NJ3006-CS02

5/5